File No.	432	SHEET	1/1

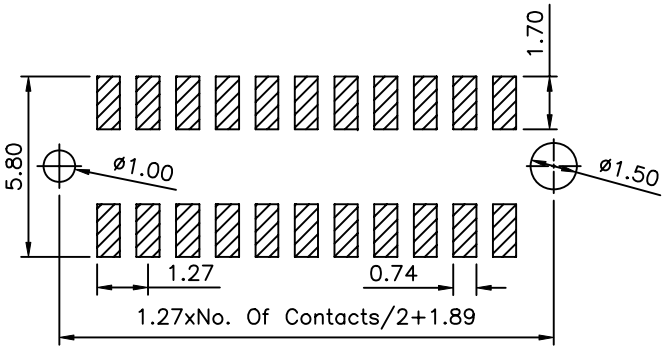

Recommended P.C.B Layout(Top Side)
(PCB Board Tolerance±0.05)

SPECIFICATION
Current Rating:1.0Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Contact:Phosphor Bronze,Gold Plated Over Nickel
Insulator:PA6T+30%G.F. UL94V−0,Black
RoHS Compliant

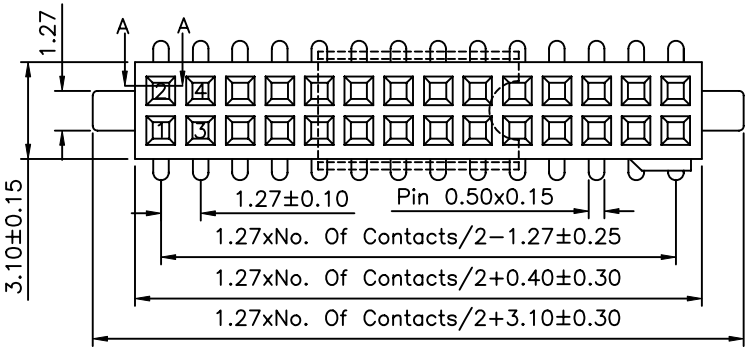

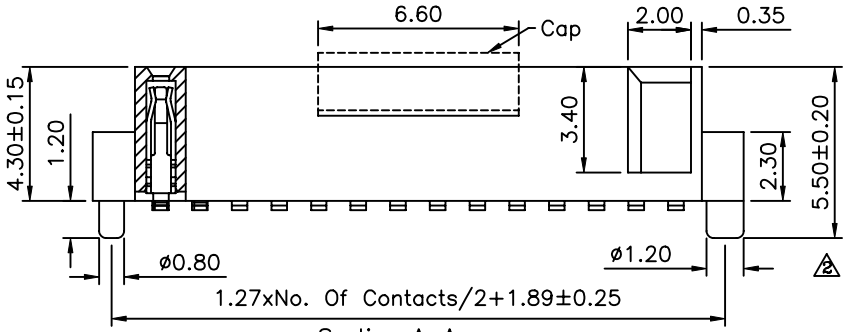

Section A−A

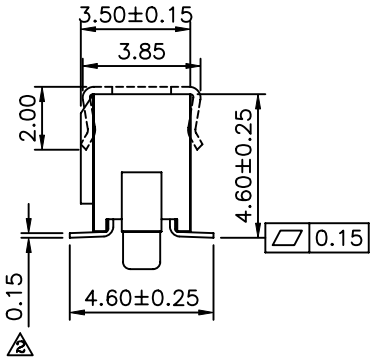

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	MEI	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
19906	CHECKED BY	HZF	.X ±0.40
	DRAWING BY	LXX	.XX ±0.25
			.XXX ±0.15
			ANG. ±3°
SCALE NONE	REV.	A2	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
2	A2	Add Dim	HZF	07/27/2009
1	A1	Modify Data	HZF	06/22/2009
0	A0	NEW RELEASE	HZF	09/27/2008