

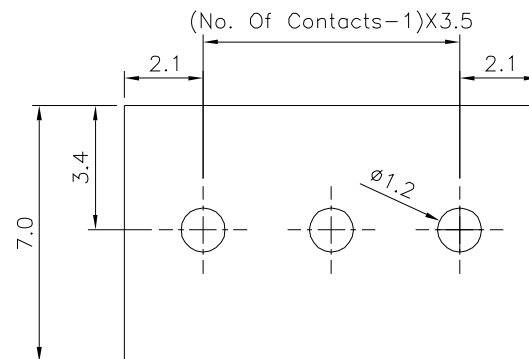
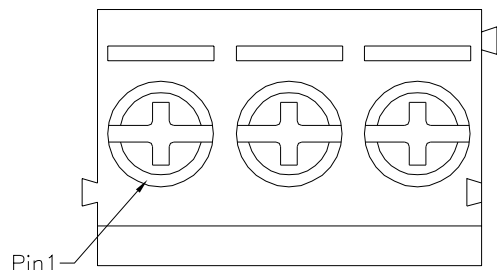


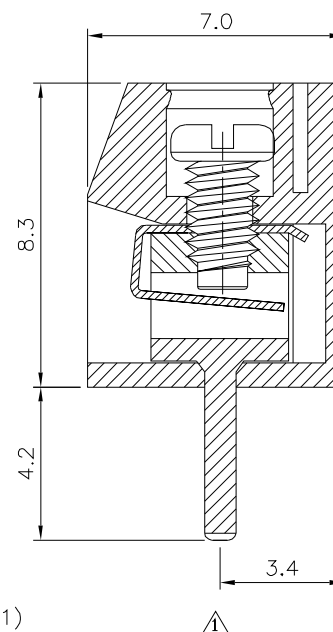

Recommended P.C.B. Layout

△ SPECIFICATION

Current Rating: 10A/Way Max.
Voltage Rating: 150V AC
Withstanding Voltage: 2000V AC/Minute
Contact Resistance: 20 Milliohms Max.
Wire Range: 16~30 AWG
Torque: 2.0kgf.cm/M2
Operating Temperature: -40°C~+105°C
Terminal: Copper Alloy, Tin Plated
Screw: Steel, Galvanized And With Cr3+ Plated
Wire Guard: Stainless Steel
Insulator: Polyamide(UL94V-0), Blue
RoHS Compliant

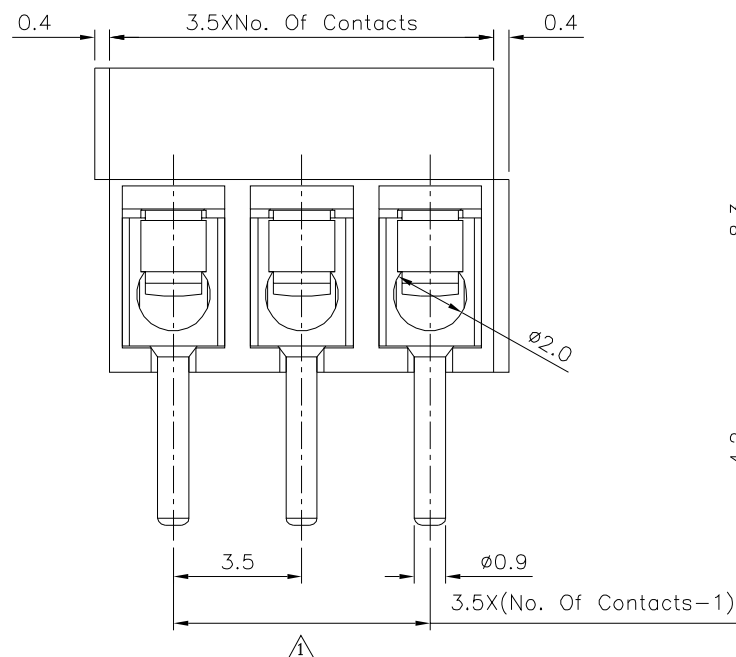

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

19964

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


WSS

REV.

B1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
ANG. ±1°

UNIT
mm



⚠	B1	Modify Data	HZF	03/05/2023
⚠	B0	NEW RELEASE	HZF	10/26/2014
NO.REV.	REVISIONS		CHK	DATE