
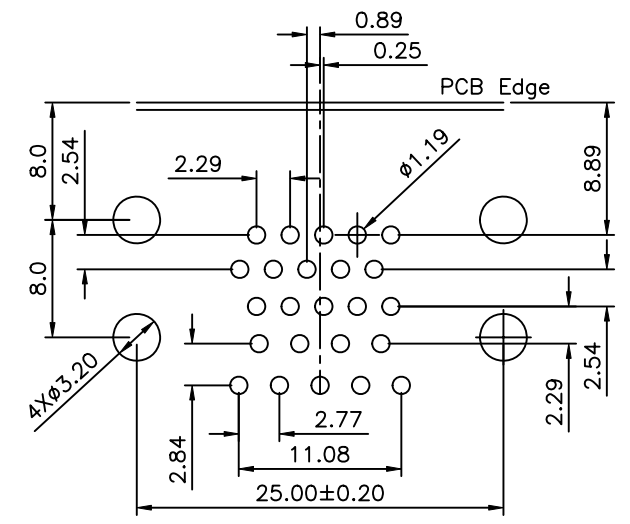
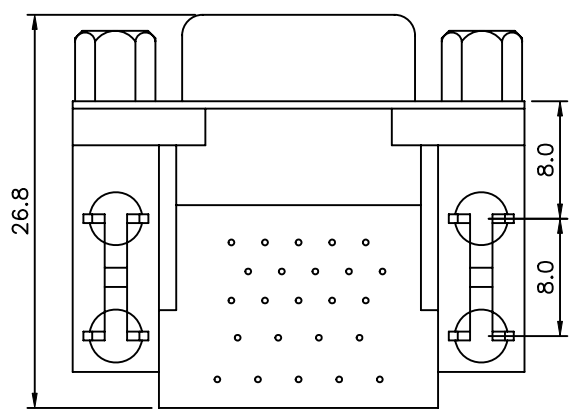
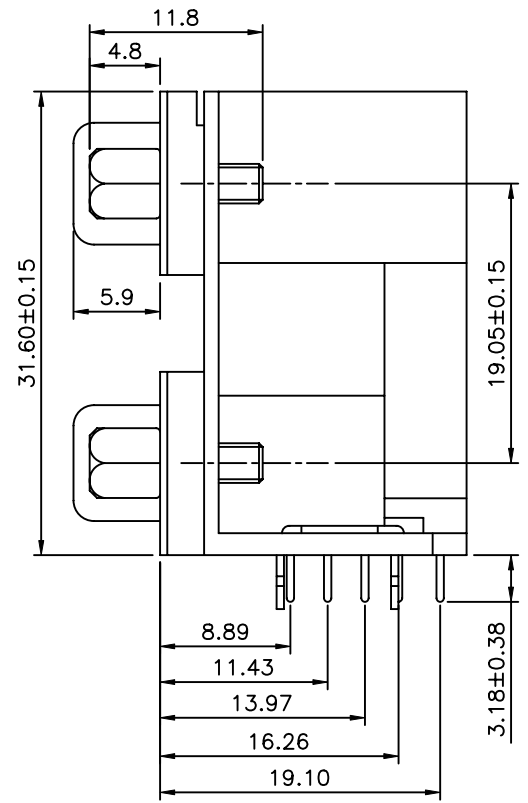


SPECIFICATION
 Current Rating: 2 Amp
 Dielectric Withstanding Voltage: 1000V AC For 1 Minute
 Contact Resistance: 15 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min. At 500V DC
 Operating Temperature: -55°C ~ +105°C
 Insulator: PBT (UL94V-0), Black
 Contact: Copper Alloy, Selective Gold Flash Over Nickel
 Shell: Steel, Nickel Plated
 Boardlock: Brass, Tin Plated
 Bracket: Zinc Alloy, Nickel Plated
 Screw: Zinc Alloy, Zinc Plated Over Nickel
 RoHS Compliant

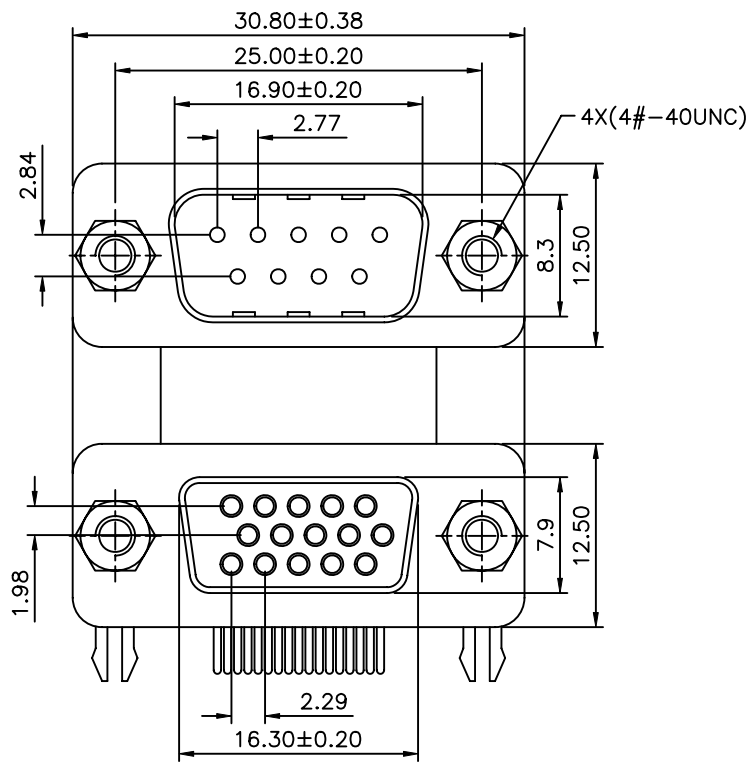

Recommended P.C.B. Layout
 (PCB Board Tolerance ±0.1)

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.25 .XX ±0.15 .XXX ±0.05 ANG. ±1°
19994		MEI		
		CHECKED BY HZF		
		DRAWING BY WZL		UNIT mm
SCALE	NONE	REV.	A0	

△ A0	NEW RELEASE	HZF	04/11/2010
NO. REV.	REVISIONS	CHK	DATE