

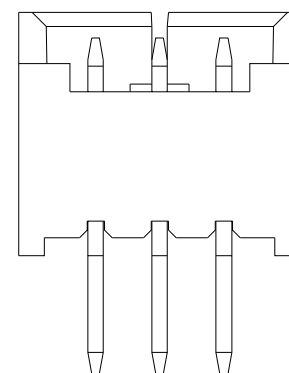
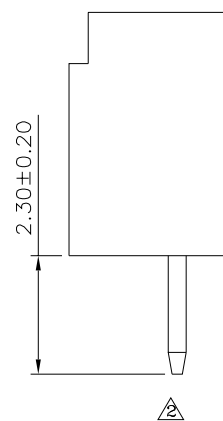


Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance±0.05)

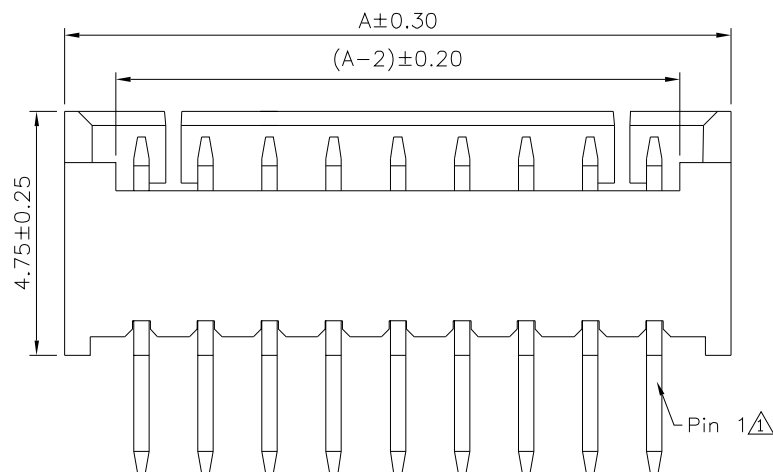

2~3 Pin

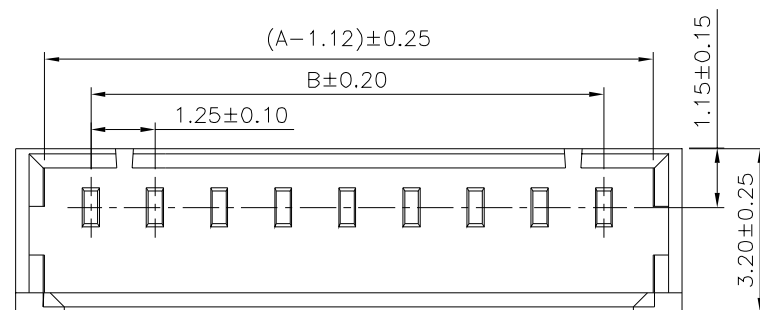

△ SPECIFICATION

Current Rating:1A AC/DC
Voltage Rating:125V AC/DC
Withstanding Voltage:250V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:100 Megaohms Min.
Temperature Range:-25°C~+85°C
△ Housing:PA66+30%G.F.(UL94V-0),Nature
Contact:Brass,Tin Plated Over Nickel
RoHS Compliant

Pin	A	B
02	4.25	1.25
03	5.50	2.50
04	6.75	3.75
05	8.00	5.00
06	9.25	6.25
07	10.50	7.50
08	11.75	8.75
09	13.00	10.00
10	14.25	11.25
11	15.50	12.50
12	16.75	13.75
13	18.00	15.00
14	19.25	16.25
15	20.50	17.50
16	21.75	18.75

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20032

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

SONG

REV.

B2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.25 △

.XX ±0.20 .X* ±2*

.XXX ±0.10 .XX* ±1*

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△	B2	Modify Data	HZF	10/18/2013
△	B1	Add Pin 1 And Color	HZF	03/20/2009
△	B0	NEW RELEASE	HZF	12/05/2006