
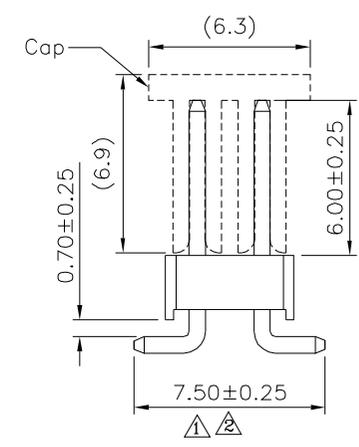
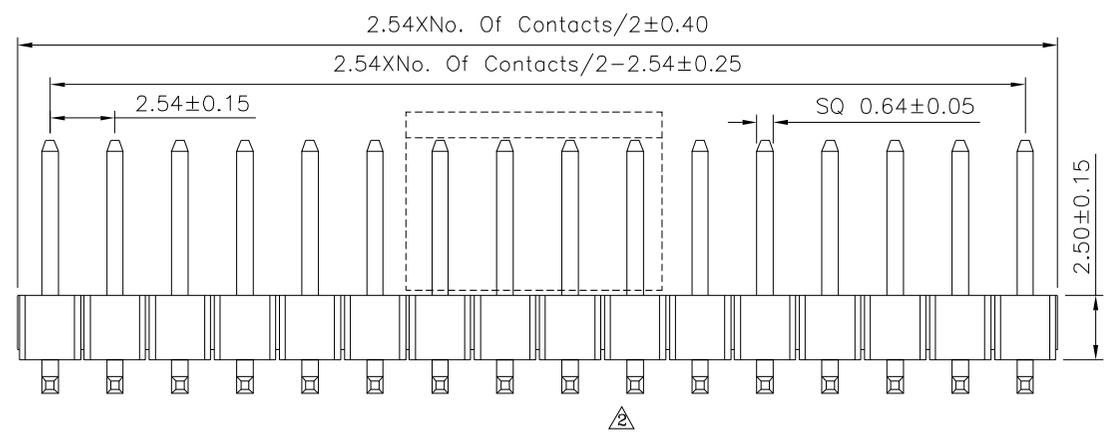


Recommended P.C.B. Layout
Tolerance: ±0.05

- SPECIFICATION**
- Current Rating: 3.0A/Contacts Max.
 - Withstand Voltage: 1000V AC/Minute
 - Contact Resistance: 20 Milliohms Max./Contacts
 - Insulation Resistance: 1000 Megaohms Min.
 - Operating Temperature: -40°C ~ +105°C
 - Housing: PA6T(UL94V-0), Black
 - Contact: Brass, Gold Flash Over Nickel
 - RoHS Compliant

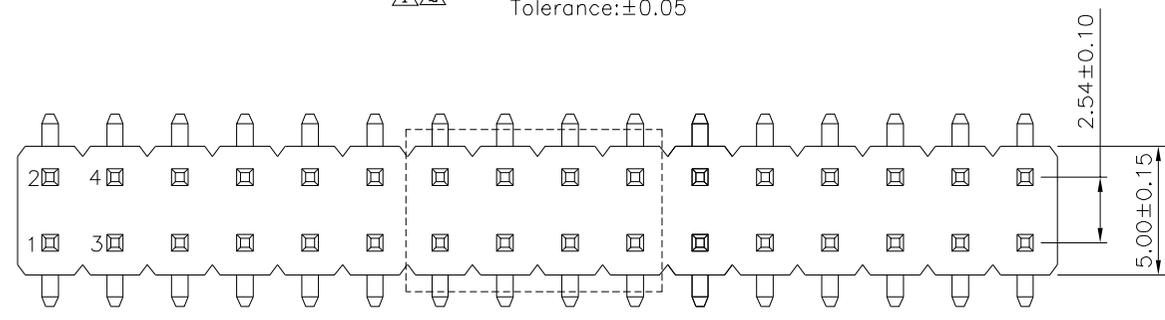

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
20040		MEI	
		CHECKED BY	
		HZF	
DRAWING BY		CYP	
SCALE	NONE	REV.	A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE																							
X.	±0.50																						
.X	±0.40																						
.XX	±0.25																						
.XXX	±0.15																						
ANG.	±5°																						
UNIT	mm																						
<table border="1"> <tr> <th>NO.</th> <th>REV.</th> <th>REVISIONS</th> <th>CHK</th> <th>DATE</th> </tr> <tr> <td>△2</td> <td>A2</td> <td>Modify Data</td> <td>HZF</td> <td>12/22/2025</td> </tr> <tr> <td>△1</td> <td>A1</td> <td>Modify Data</td> <td>HZF</td> <td>10/31/2014</td> </tr> <tr> <td>△0</td> <td>A0</td> <td>NEW RELEASE</td> <td>HZF</td> <td>01/22/2016</td> </tr> </table>				NO.	REV.	REVISIONS	CHK	DATE	△2	A2	Modify Data	HZF	12/22/2025	△1	A1	Modify Data	HZF	10/31/2014	△0	A0	NEW RELEASE	HZF	01/22/2016
NO.	REV.	REVISIONS	CHK	DATE																			
△2	A2	Modify Data	HZF	12/22/2025																			
△1	A1	Modify Data	HZF	10/31/2014																			
△0	A0	NEW RELEASE	HZF	01/22/2016																			