


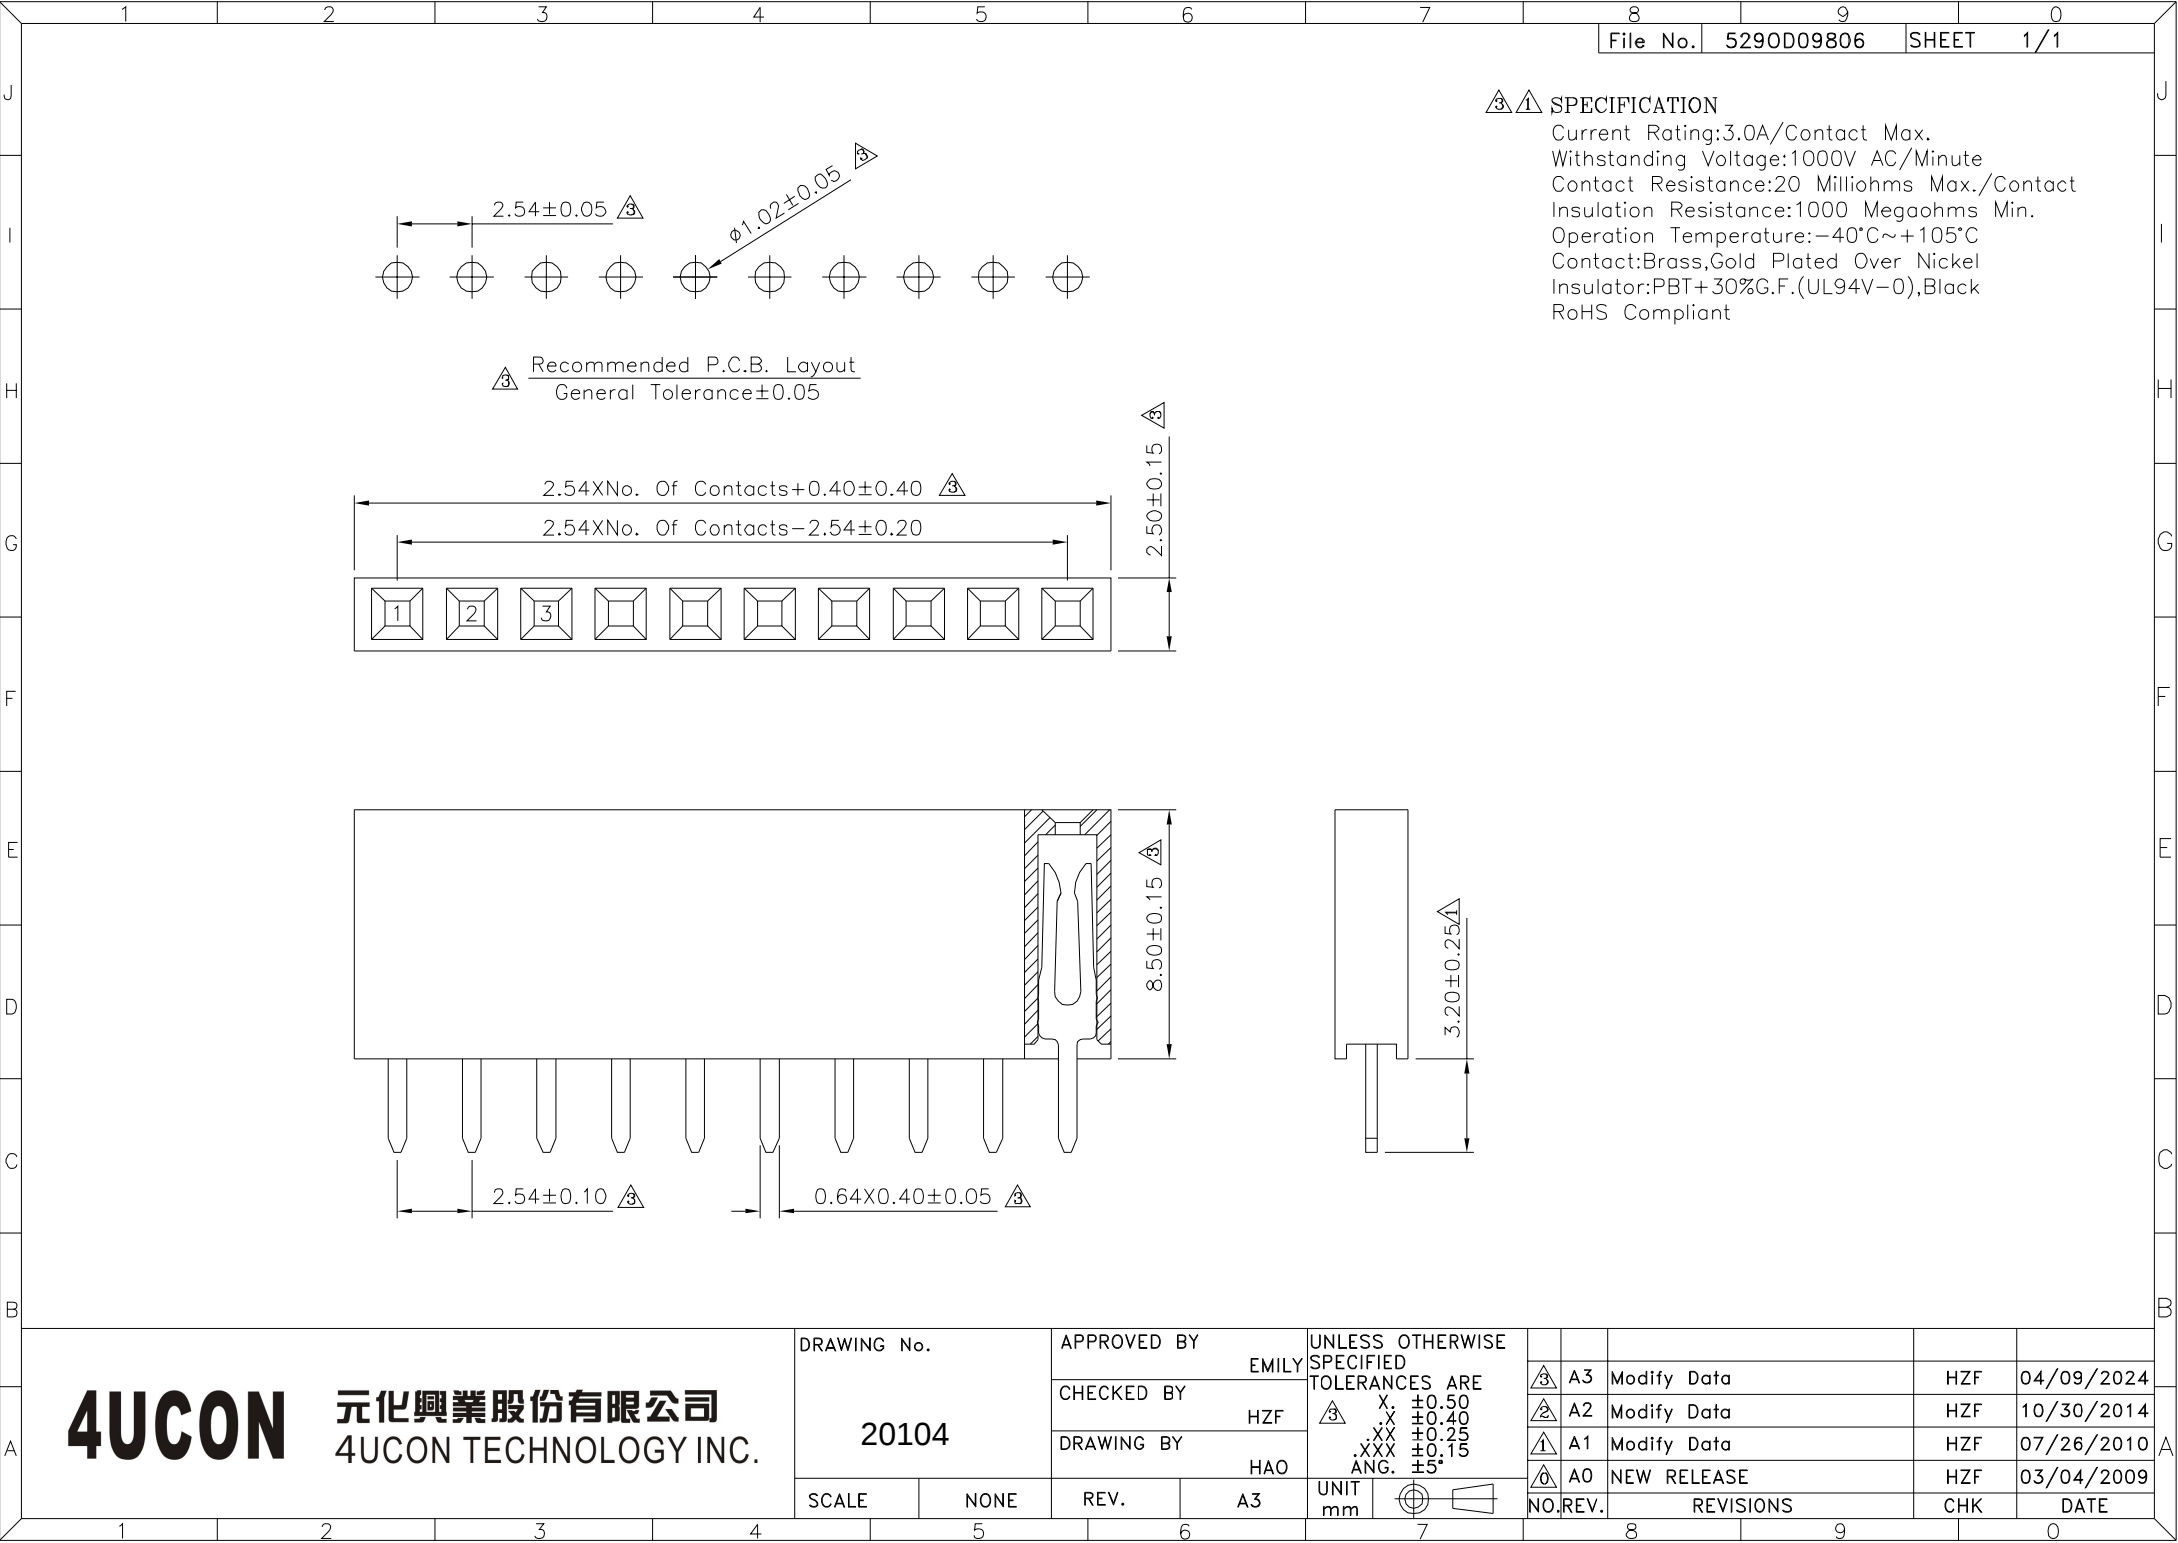

△△ SPECIFICATION
Current Rating:3.0A/Contact Max.
Withstanding Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max./Contact
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Contact:Brass,Gold Plated Over Nickel
Insulator:PBT+30%G.F.(UL94V−0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		EMILY	
		CHECKED BY	
20104		HZF	
		DRAWING BY	
		HAO	
SCALE	NONE	REV.	A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
X.	±0.50
.X	±0.40
.XX	±0.25
.XXX	±0.15
ANG.	±5°
UNIT	mm

NO.	REV.	REVISIONS	CHK	DATE
△3	A3	Modify Data	HZF	04/09/2024
△2	A2	Modify Data	HZF	10/30/2014
△1	A1	Modify Data	HZF	07/26/2010
△0	A0	NEW RELEASE	HZF	03/04/2009