

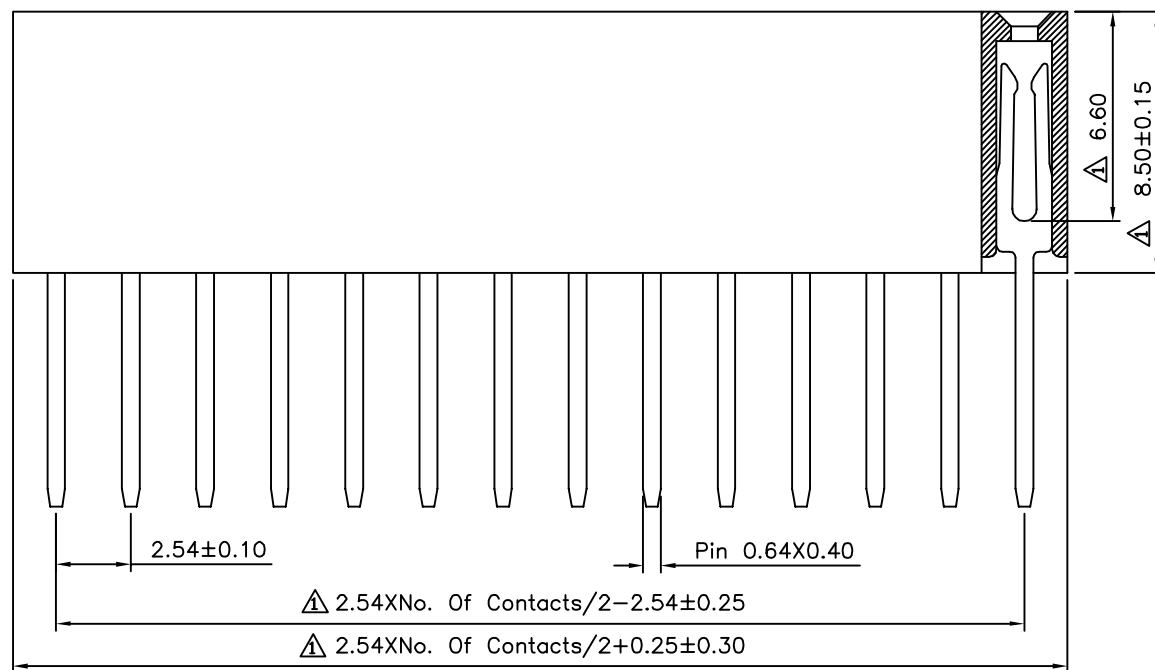


△ Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance ± 0.05)

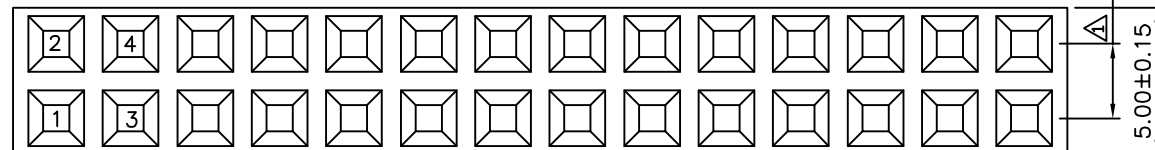

△ SPECIFICATION

Current Rating:3.0 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Plated Over Nickel
Insulator:PBT+30%G.F.(UL94V-0),Black
RoHS Compliant

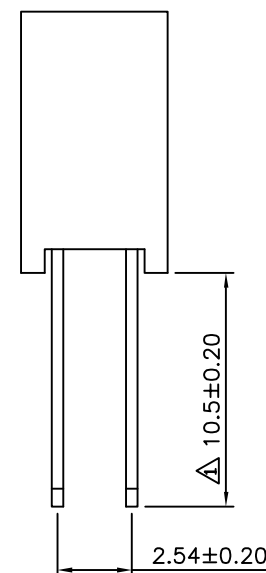

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20140

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG


REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ± 0.40
.XX ± 0.25
.XXX ± 0.15
ANG. $\pm 3^\circ$

UNIT
mm



NO. REV.

REVISIONS

CHK

DATE

A1 Modify Data

A0 NEW RELEASE

HZF

HZF

06/22/2011

02/08/2007