
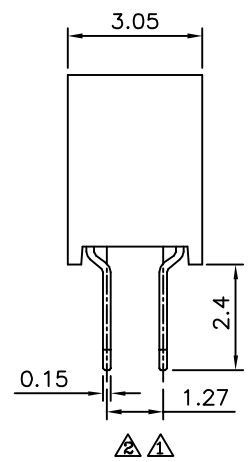
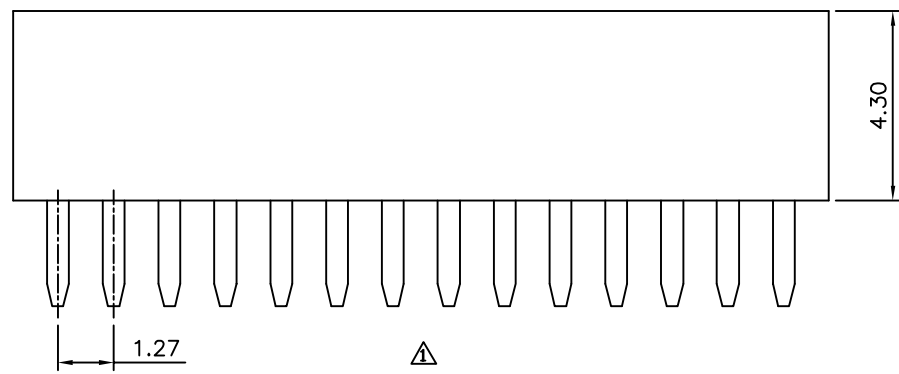


△ SPECIFICATION

Current Rating:1.0 Amp Max.  
 Dielectric Withstand Voltage:600V AC RMS For 60 Seconds  
 Insulation Resistance:5000 Megaohms Min. At 500V DC  
 Connect Resistance:30 Milliohms Max.  
 Operating Temperature:-40°C~+105°C  
 Housing:LCP(UL94V-0),Black  
 Terminal:Phosphor Bronze,Gold Plated Over Nickel  
 RoHS Compliant

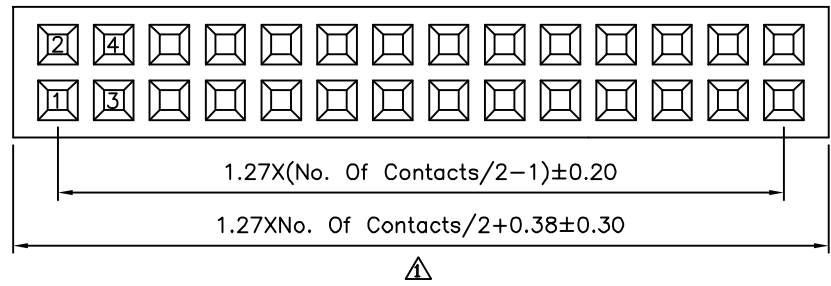

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.30 .XX ±0.20 .XXX ±0.10
20159		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		HAO		
SCALE	NONE	REV.	A2	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	09/01/2015
△ A1		Modify Data	HZF	05/26/2015
△ A0		NEW RELEASE		