




Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

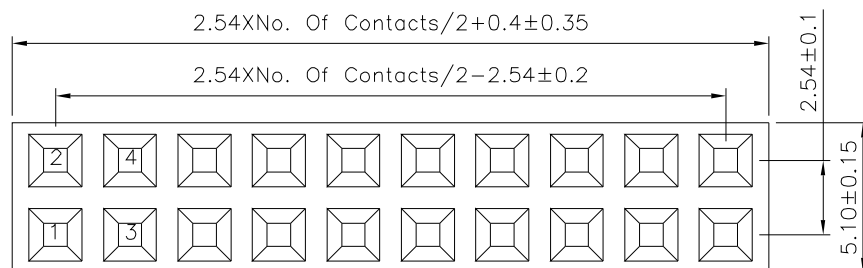

A

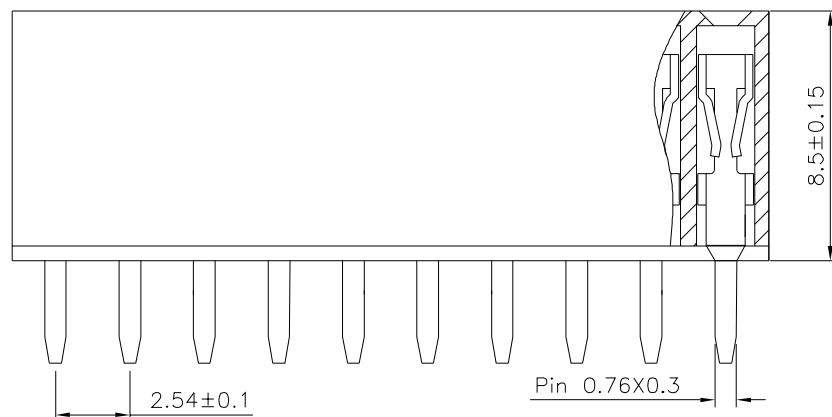

A

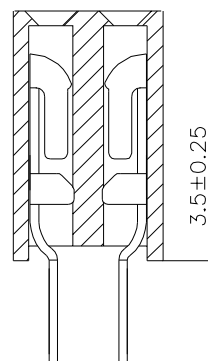

A

△ SPECIFICATION

Current Rating:3 Amp
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Insulator:PBT(UL94V−0),Black
Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20173

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ± 0.25 X.* $\pm 2^{\circ}$
.X ± 0.20 .X* $\pm 1.5^{\circ}$
.XX ± 0.15 .XX* $\pm 1^{\circ}$
.XXX ± 0.10 .XXX* $\pm 0.5^{\circ}$

UNIT

mm



NO.

REV.

REVISIONS

CHK

DATE

A1

Modify Data

HZF

10/15/2019

A0

NEW RELEASE

HZF

03/04/2013