


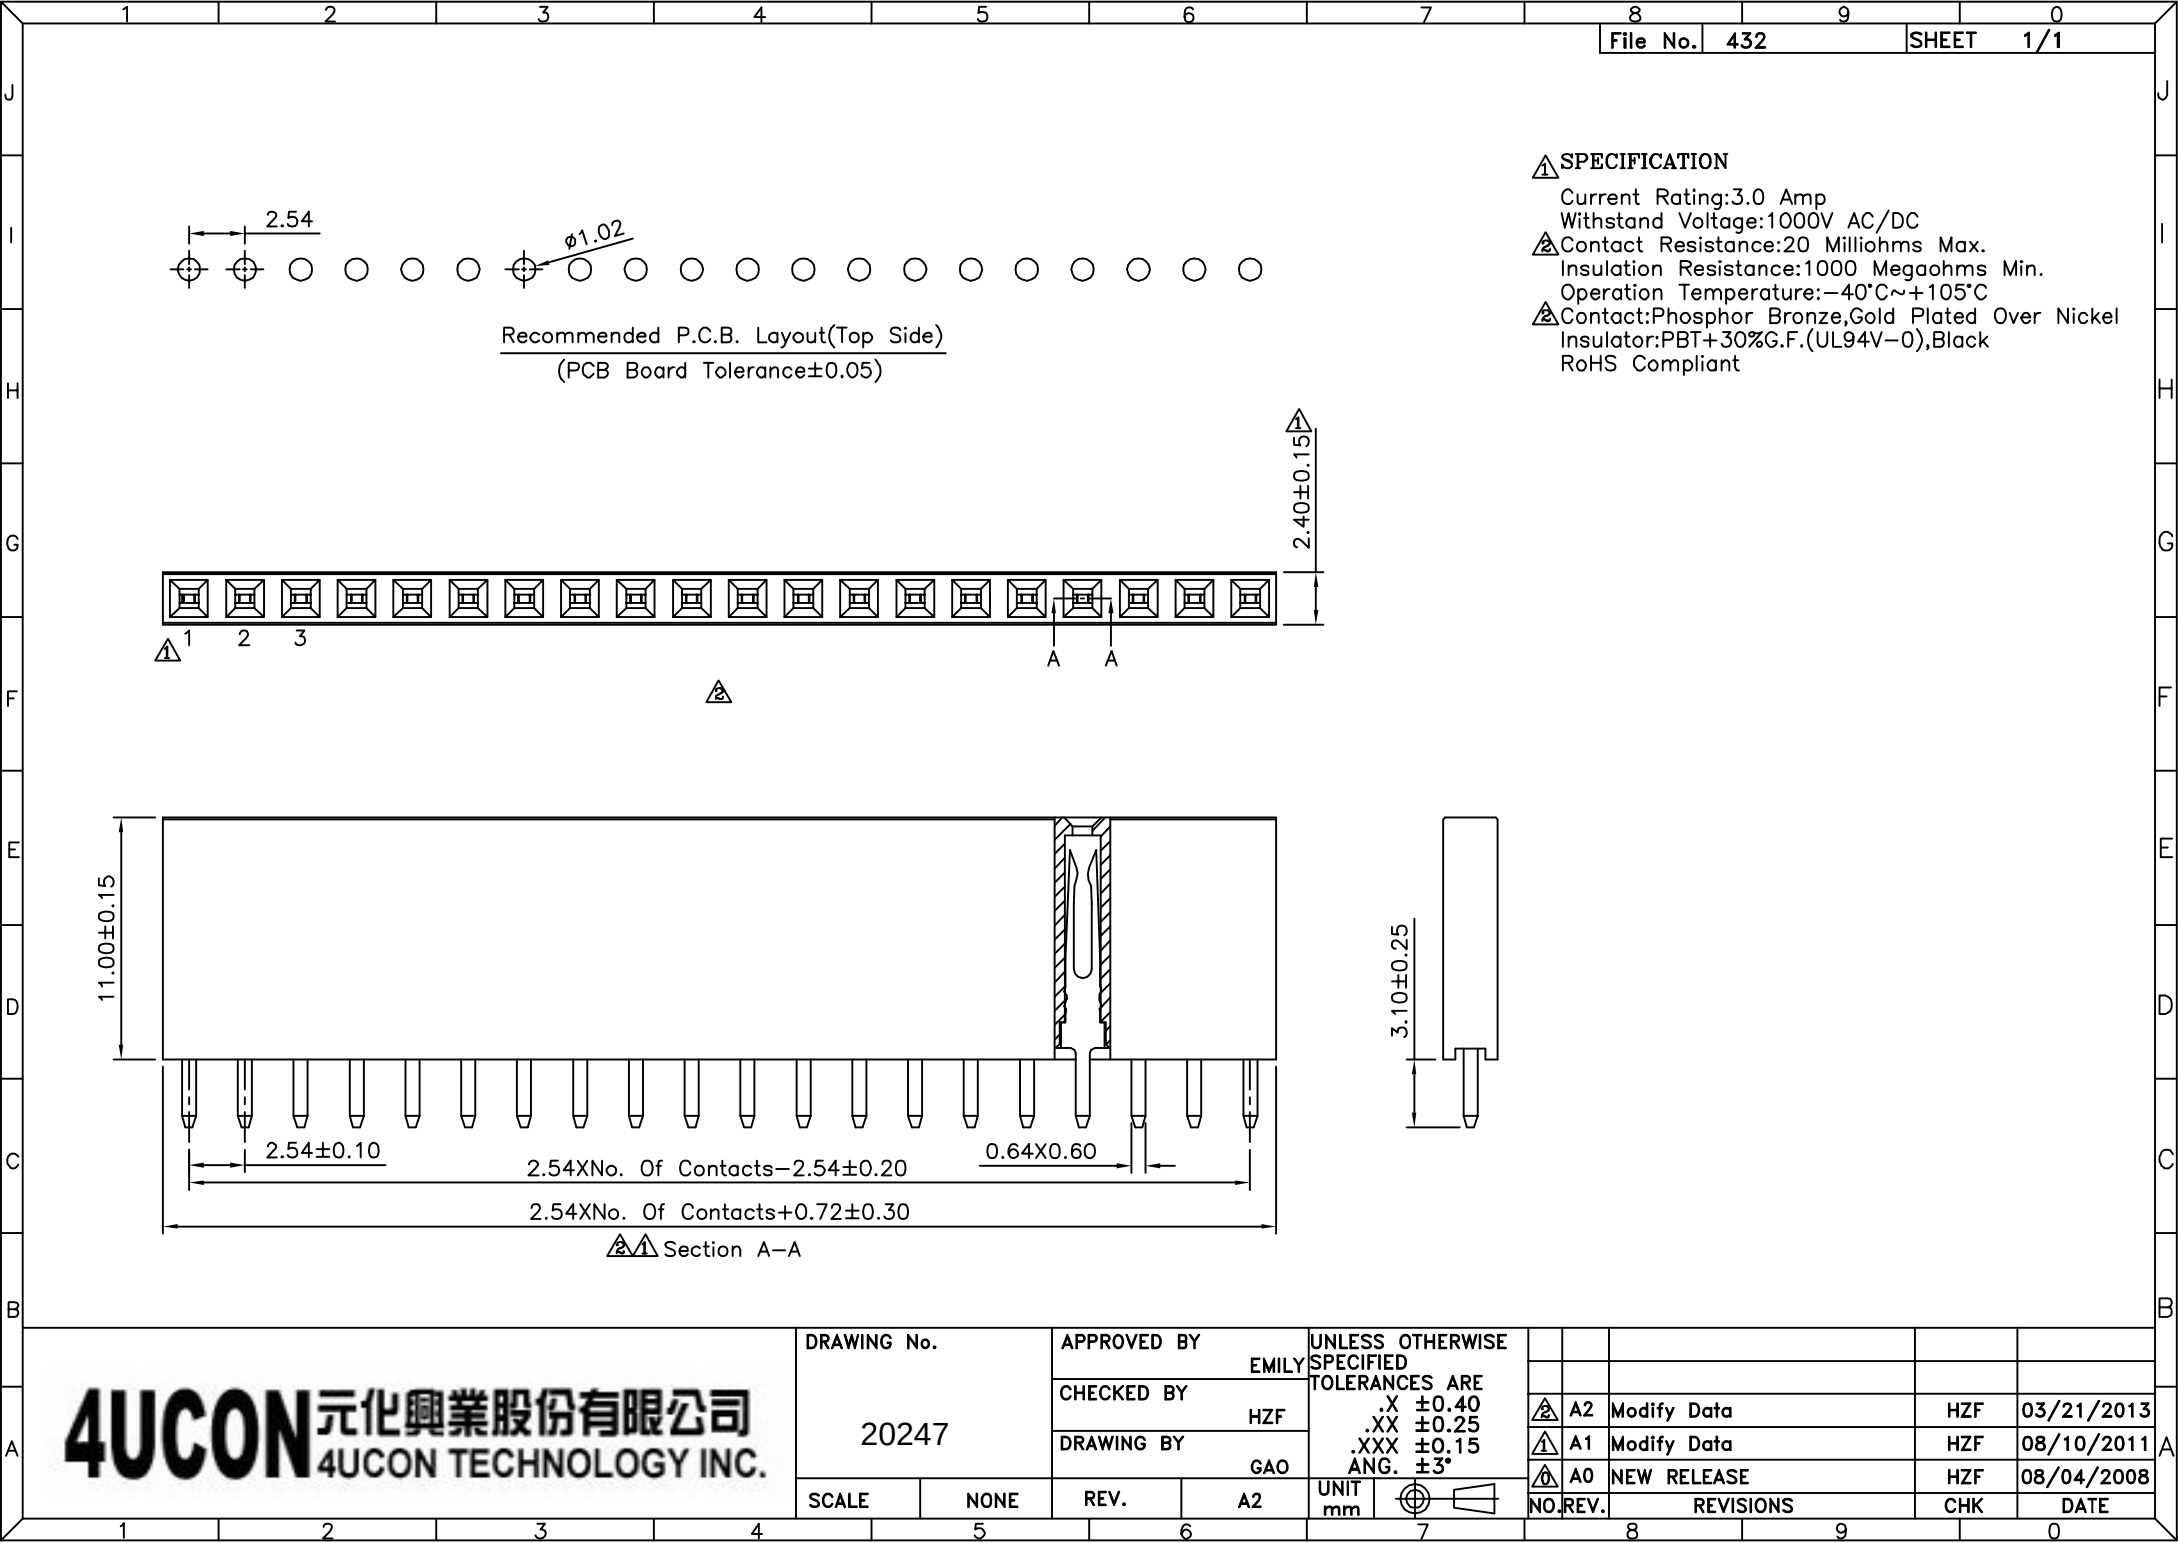


△ SPECIFICATION
Current Rating:3.0 Amp
Withstand Voltage:1000V AC/DC
△ Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
△ Contact:Phosphor Bronze,Gold Plated Over Nickel
Insulator:PBT+30%G.F.(UL94V−0),Black
RoHS Compliant

4UCON元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 20247		APPROVED BY EMILY	
		CHECKED BY HZF	
		DRAWING BY GAO	
SCALE	NONE	REV.	A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.40
.XX ±0.25
.XXX ±0.15
ANG. ±3°



NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	03/21/2013
△ A1		Modify Data	HZF	08/10/2011
△ A0		NEW RELEASE	HZF	08/04/2008