


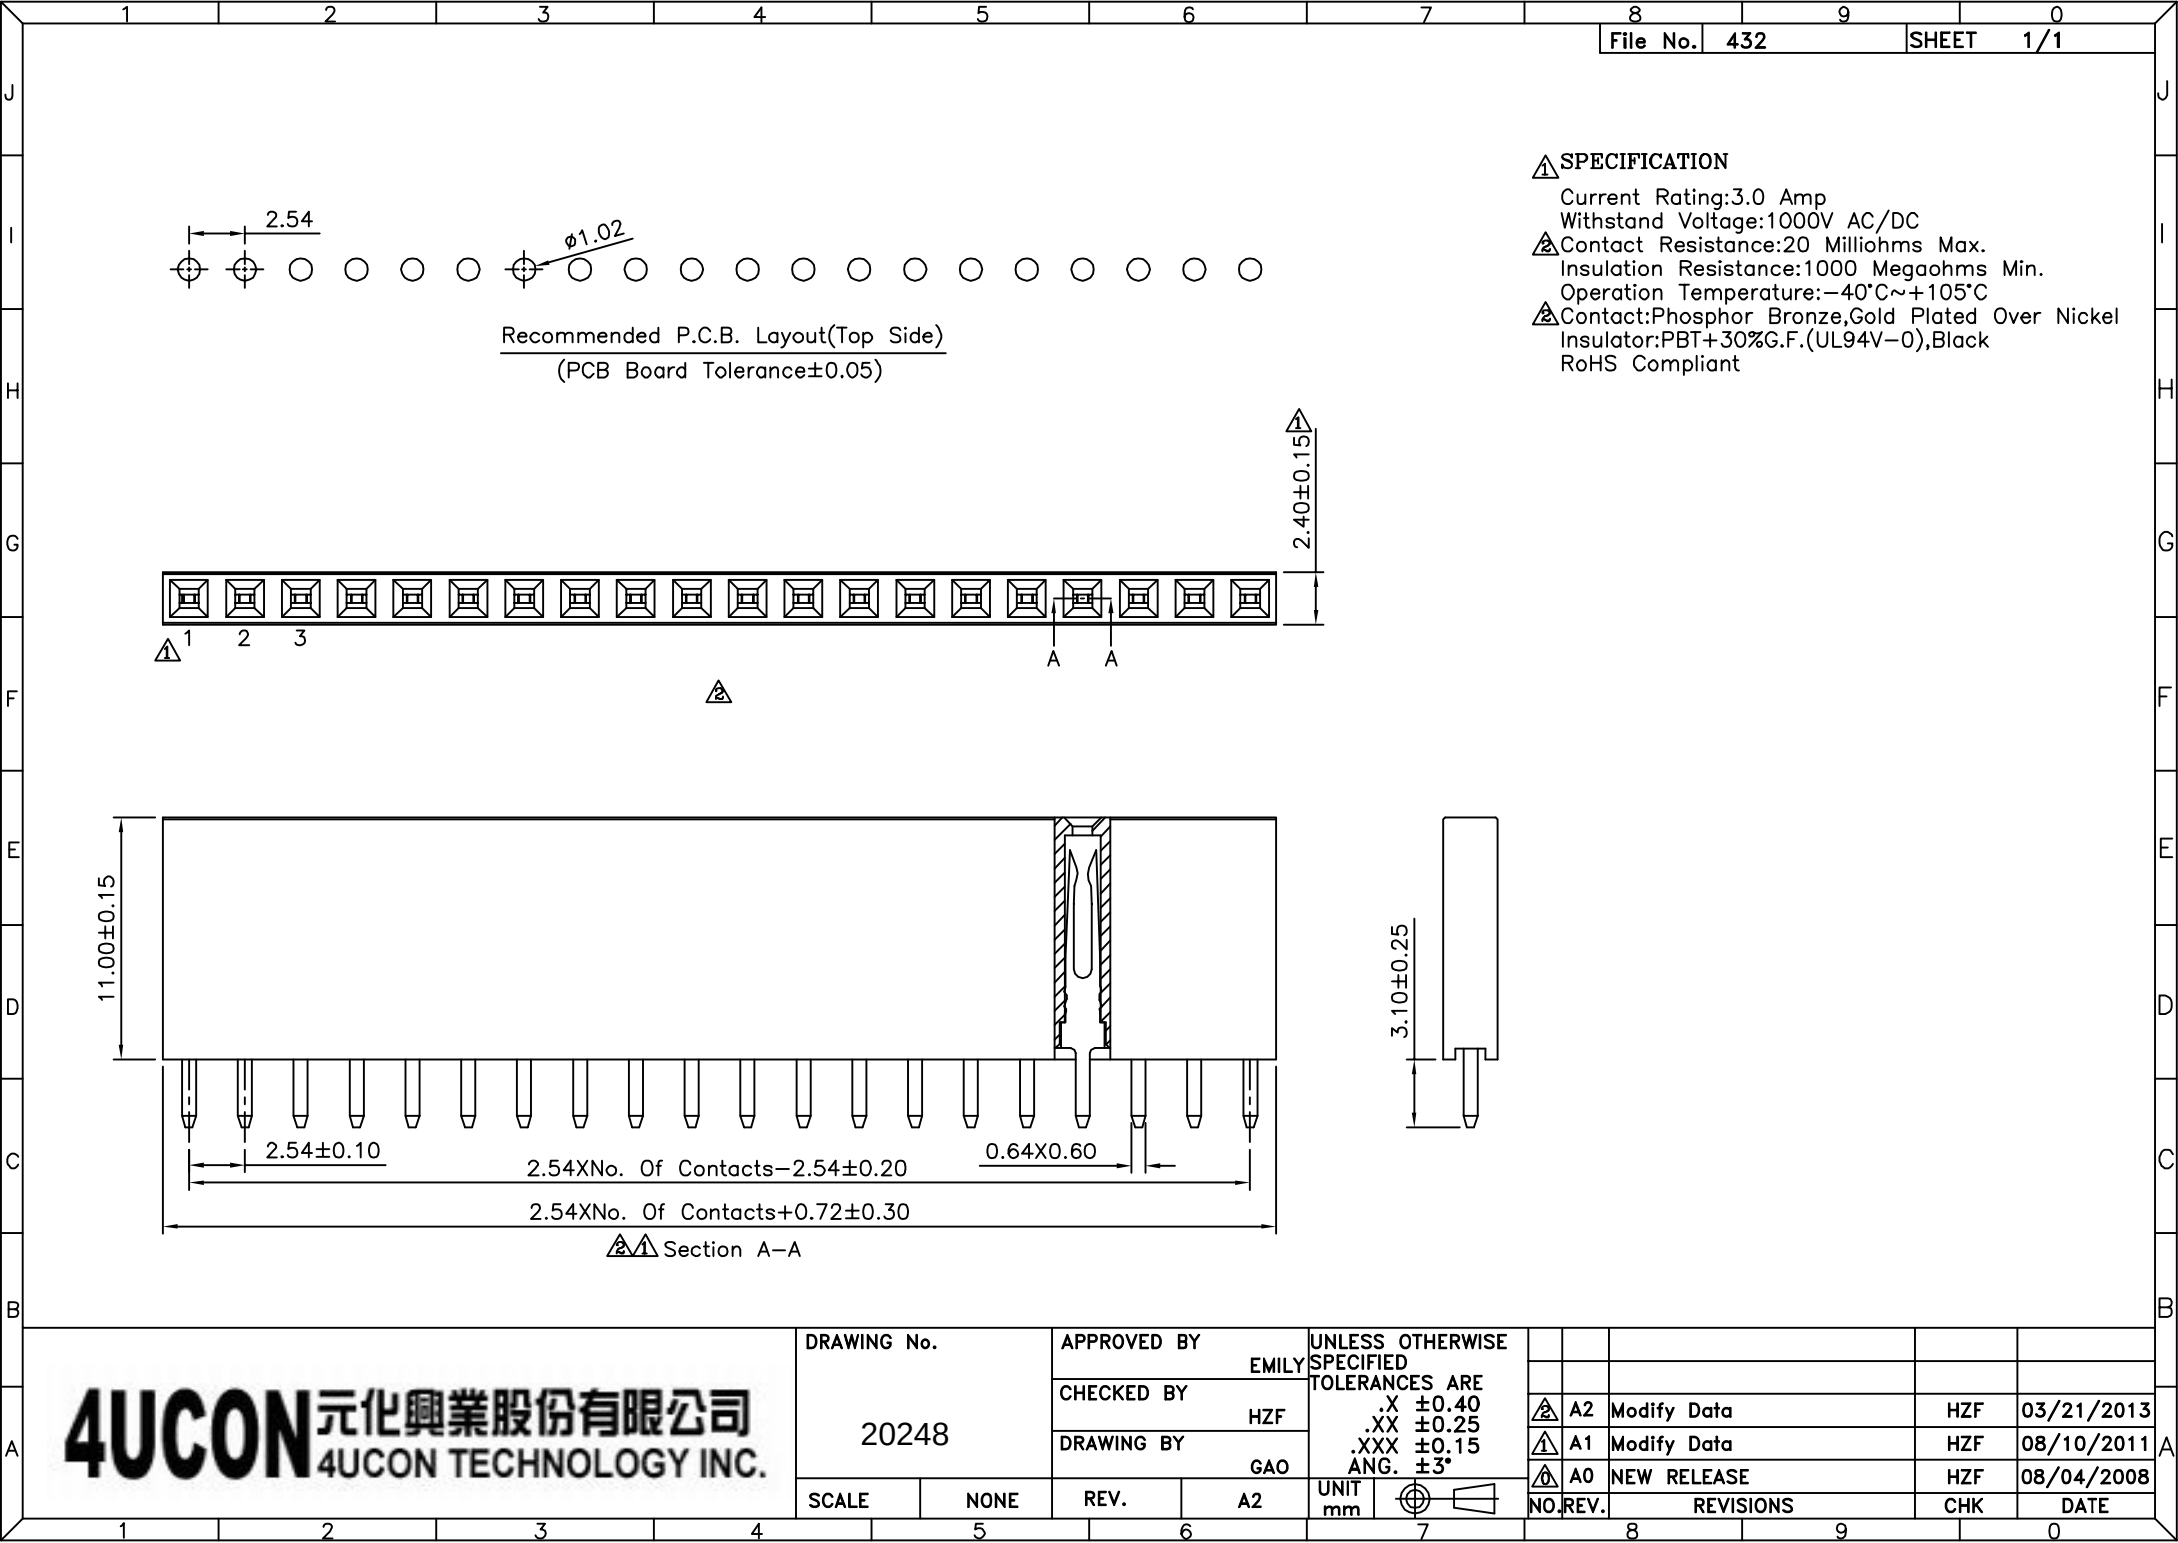

- △ SPECIFICATION
- Current Rating: 3.0 Amp
 - Withstand Voltage: 1000V AC/DC
 - △ Contact Resistance: 20 Milliohms Max.
 - Insulation Resistance: 1000 Megaohms Min.
 - Operation Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 - △ Contact: Phosphor Bronze, Gold Plated Over Nickel
 - Insulator: PBT+30%G.F.(UL94V-0), Black
 - RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 20248		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°
		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		GAO		
SCALE	NONE	REV.	A2	UNIT mm
				

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	03/21/2013
△ A1		Modify Data	HZF	08/10/2011
△ A0		NEW RELEASE	HZF	08/04/2008