



Recommended P.C.B. Layout

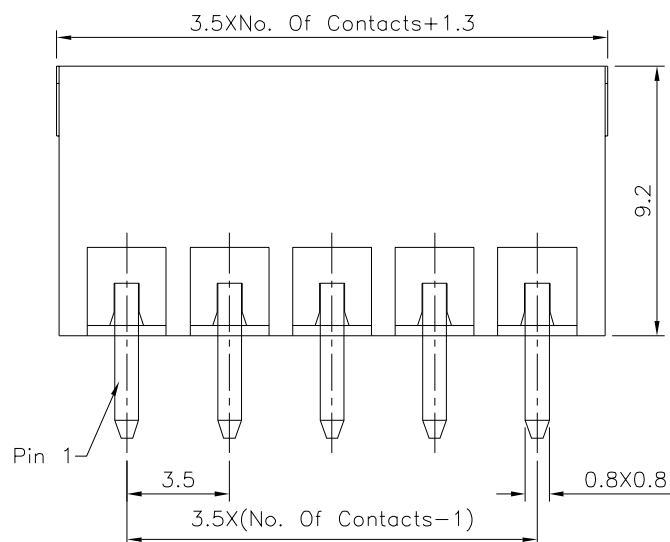

Length(L)	Tolerances
0~30	±0.30
30~60	±0.40
60~120	±0.50
120~220	±0.60

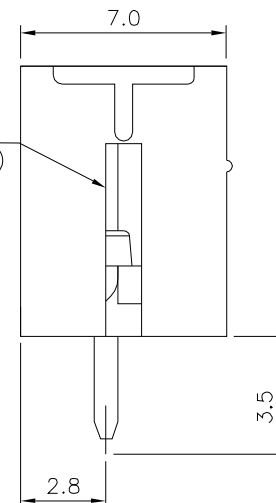

2P~6P Open Type
Above 7P (Including 7P)
Coles Type

SPECIFICATION

Current Rating:12A/Way Max.
Voltage Rating:300V AC
Withstanding Voltage:1600V AC For 1 Minute
Operation Temperature:-40°C~+105°C
Insulator:Polyamide(UL94V-0),Gray
Solder Pin:Copper Alloy,Tin Plated
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20324

SCALE

NONE

APPROVED BY

Jason Wu

CHECKED BY

Leo Han

DRAWING BY


Michelle Lee

REV.

B0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.40
.XX ±0.30
ANG. ±1°

UNIT
mm



NO. REV.

B0

NEW RELEASE

REVISIONS

CHK

DATE

06/01/2026