

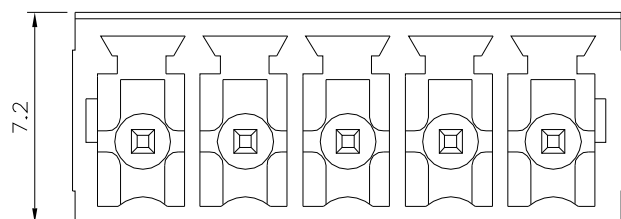


Recommended P.C.B. Layout

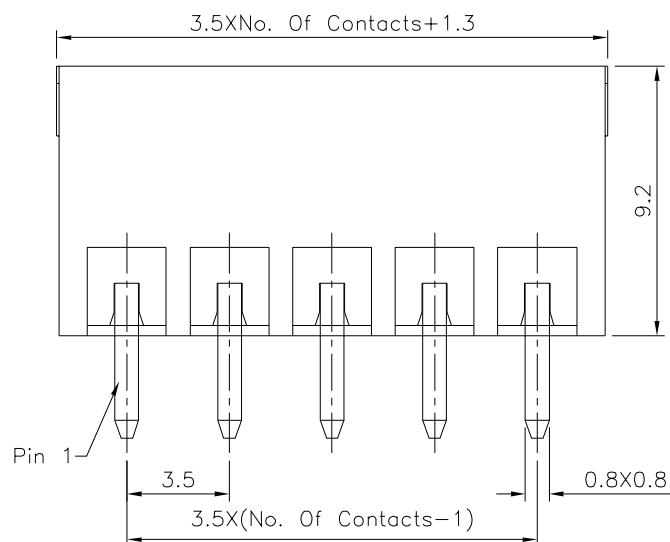

2P~6P Open Type
Above 7P (Including 7P)
Coles Type

Length(L)	Tolerances
0~30	±0.30
30~60	±0.40
60~120	±0.50
120~220	±0.60

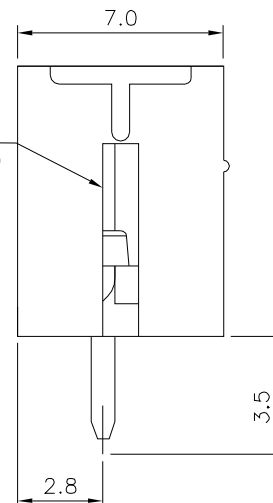

SPECIFICATION

Current Rating:12A/Way Max.

Voltage Rating:300V AC

Withstanding Voltage:1600V AC For 1 Minute

Operation Temperature:-40°C~+105°C

Insulator:Polyamide(UL94V-0),Gray

Solder Pin:Copper Alloy,Tin Plated

RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20328

SCALE

NONE

APPROVED BY

Jason Wu

CHECKED BY

Leo Han

DRAWING BY

Michelle Lee

REV.

B0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE


X. ±0.50

.X ±0.40

.XX ±0.30

ANG. ±1°

UNIT
mm



NO. REV.

B0

NEW RELEASE

REVISIONS

CHK

DATE

HZF

06/01/2026