









△ SPECIFICATION
 Current Rating: 1A Max.
 Dielectric Withstanding Voltage: 500V AC
 For 1 Minute
 Contact Resistance: 30 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 At DC 500V
 Temperature Range: -55°C ~ +105°C
 RoHS Compliant

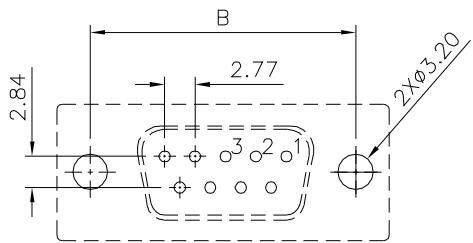

△ Recommended P.C.B. Layout

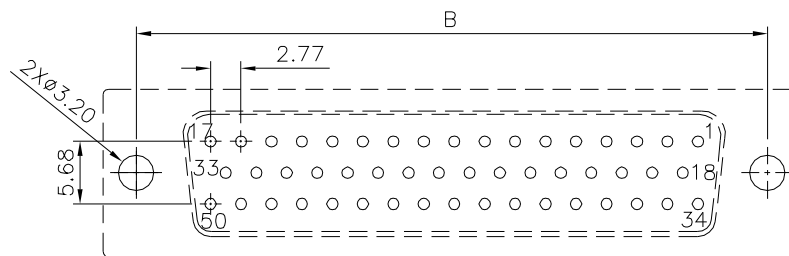

△ Recommended P.C.B. Layout

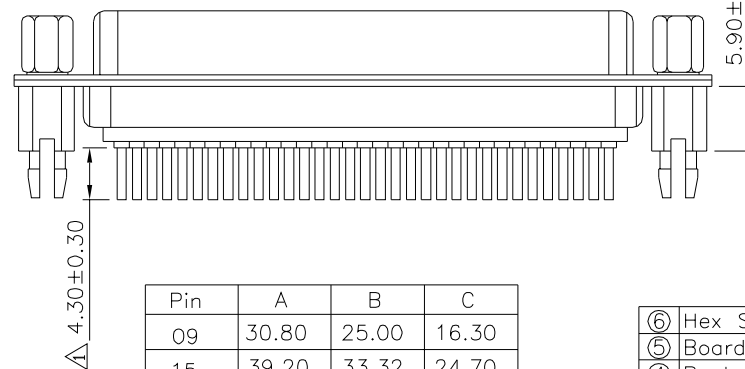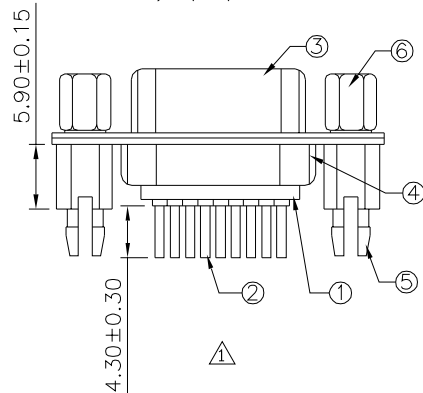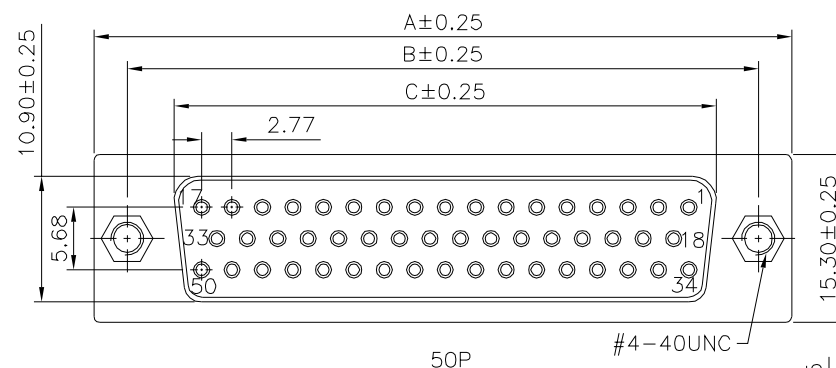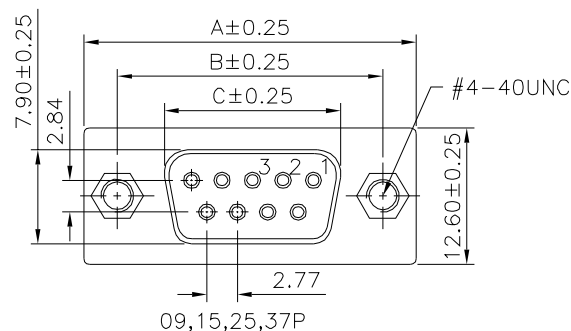

Pin	A	B	C
09	30.80	25.00	16.30
15	39.20	33.32	24.70
25	53.05	47.04	38.40
37	69.40	63.50	54.80
50	67.10	61.00	52.20

⑥	Hex Screw	2	Brass	Nickel Plated
⑤	Boardlock	2	Brass	Tin Plated
④	Back-Shell	1	Cold Rolled Steel	Tin Plated
③	Front-Shell	1	Cold Rolled Steel	Tin Plated
②	Contact	2	Brass	Gold Plated Over Nickel
①	Housing	2	PBT, UL94V-0	Black
△	No. Description	Q'ty	Material	Remark

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

20359

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.30
 .XX ±0.20
 .XXX ±0.10
 ANG. ±1°

UNIT



△ A1

Modify Data

HZF

04/02/2015

△ A0

NEW RELEASE

HZF

03/18/2012

NO. REV.

REVISIONS

CHK

DATE