

SPECIFICATION

Current Rating:3.0 Amp/Contact Max.

Withstand Voltage:1000V AC/Minute

Contact Resistance:20 Milliohms Max./Contact

Insulation Resistance:1000 Megaohms Min. At 100V

Operation Temperature:-55°C~+105°C


Soldering Temperature:+260°C Max.

Contact:Brass,Gold Flash Over Nickel



Insulator:PA6T+30%G.F.(UL94V-0),Black

Mechanical Life Cycle:200 Min.


RoHS Compliant



Recommended P.C.B. Layout

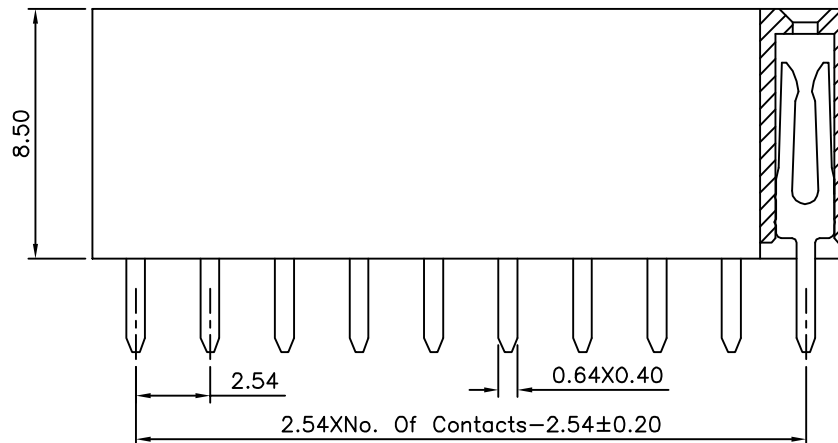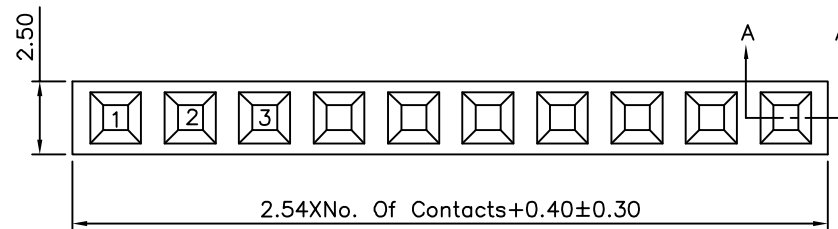

Section A-A



DRAWING No.

20376

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES AREX. ± 0.50 .X ± 0.30 .XX ± 0.20 .XXX ± 0.10 ANG. $\pm 5^\circ$

UNIT

mm



NO. REV.

NEW RELEASE

REVISIONS

HZF

CHK

03/04/2012

DATE

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.