

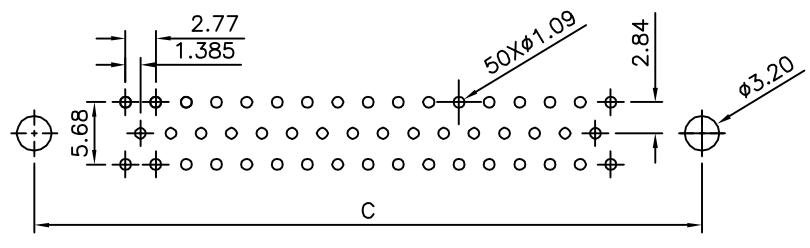

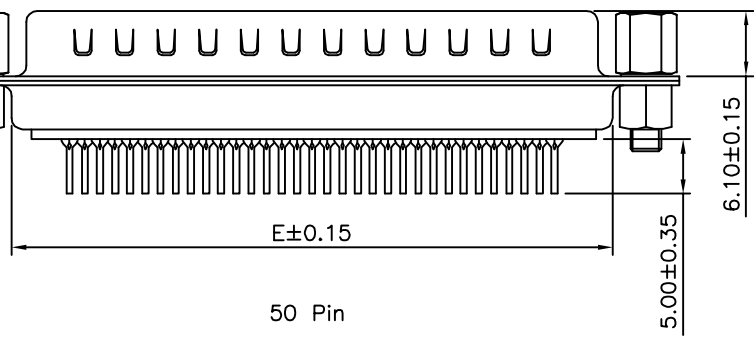

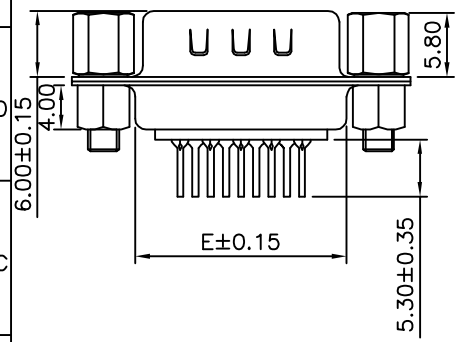


Recommended P.C.B. Layout

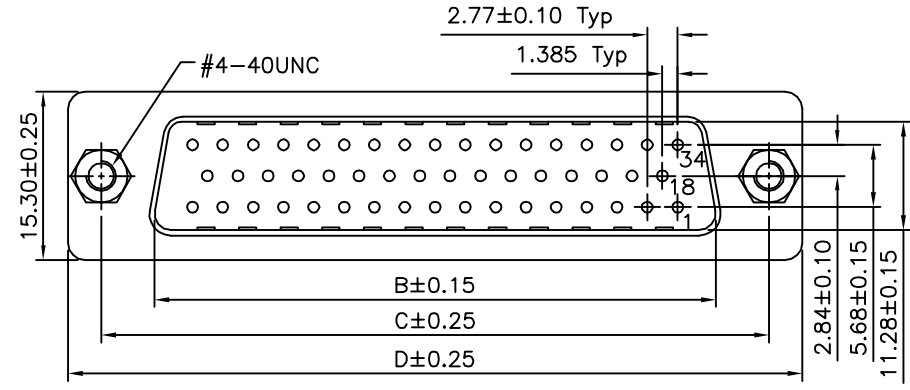

Recommended P.C.B. Layout

SPECIFICATION
 Current Rating:5 Amps
 Withstanding Voltage:1000V(One Minute)
 Insulation Resistance:1000 Megaohms Min.
 At 500V DC
 Contact Resistance:20 Milliohms Max.
 Operation Temperature:-50°C~+105°C
 Insulator:PBT+30%G.F.(UL94V-0),Black
 ⚠ Contact:Brass,Gold Flash On Contact Area,
 Tin Plated On Solder Tails,Over Nickel
 Shell:SPCC,Front:Nickel Plated,Rear:Tin Plated
 Screw:12L14,Nickel Plated
 Nut:Copper Alloy,Nickel Plated
 RoHS Compliant

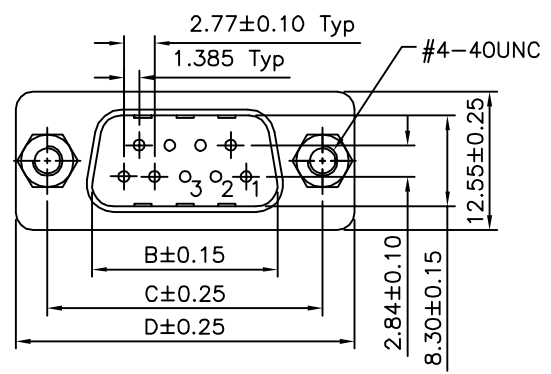

09,15,25,37 Pin

50 Pin

Pin	B	C	D	E
09	16.92	24.99	30.81	19.20
15	25.25	33.32	39.20	27.70
25	38.96	47.04	53.04	41.10
37	55.42	63.50	69.40	57.30
50	52.81	61.00	67.00	55.10

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE						
20392		MEI								
		CHECKED BY		.X ±0.38 .X' ±3'						
		HZF		.XX ±0.25 .XX' ±1'						
		DRAWING BY		.XXX ±0.05 .XXX' ±0.5'		A1		Modify Data		
		SONG				A0		NEW RELEASE		
SCALE	NONE	REV.	A1	UNIT	mm	NO.	REV.	REVISIONS	CHK	DATE