

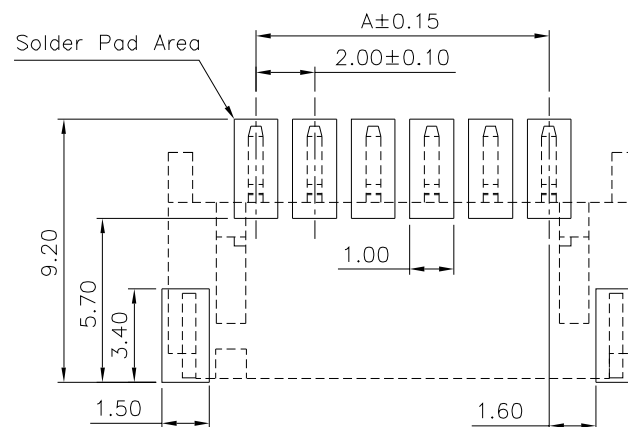
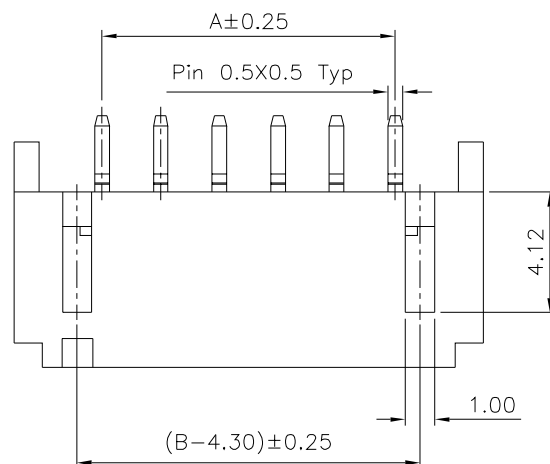



△ SPECIFICATION

Current Rating: 2A AC/DC
 Voltage Rating: 100V AC/DC
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Withstanding Voltage: 800V AC/Minute
 Temperature Range: -25°C ~ +85°C
 Insulator: LCP+30%G.F.(UL94V-0), Black
 Pin: Brass, Tin Plated Over Nickel
 Latch: Brass, Tin Plated Over Nickel
 RoHS Compliant

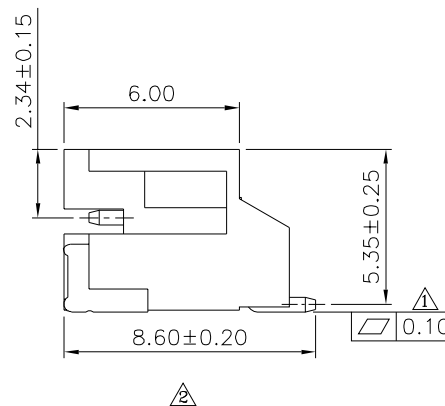

Recommended P.C.B Layout(Top Side)
 P.C.B Thickness=1.20~1.60mm(Tolerance=±0.05)

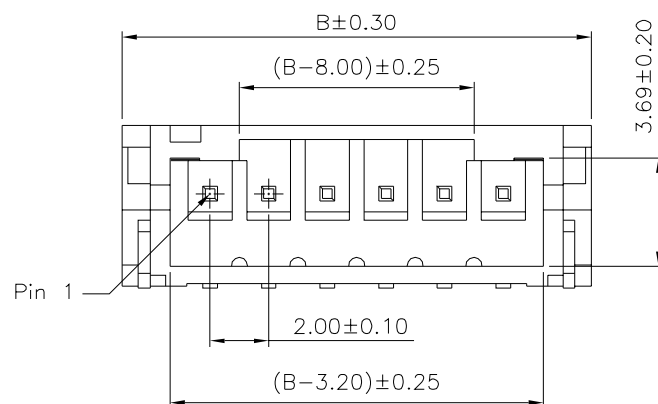

Pin	A	B	Pin	A	B
2	2.00	8.00	10	18.00	24.00
3	4.00	10.00	11	20.00	26.00
4	6.00	12.00	12	22.00	28.00
5	8.00	14.00	13	24.00	30.00
6	10.00	16.00	14	26.00	32.00
7	12.00	18.00	15	28.00	34.00
8	14.00	20.00	16	30.00	36.00
9	16.00	22.00			

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 20404

APPROVED BY
 MEI
 CHECKED BY
 HZF
 DRAWING BY
 CYP

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.25
 .XX ±0.20 .X* ±2*
 .XXX ±0.10 .XX* ±1*

SCALE NONE

REV. A2

UNIT mm

NO. REV.

REVISIONS

CHK DATE

△ A2 Modify Data HZF 03/01/2016

△ A1 Modify Data HZF 11/04/2013

△ A0 NEW RELEASE HZF 05/09/2012