

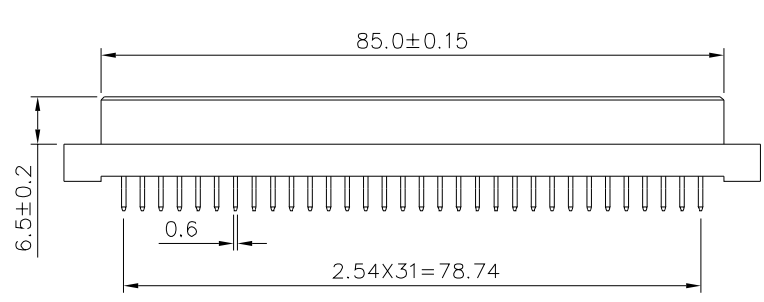
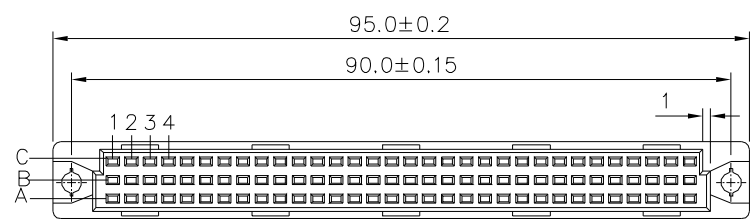


△ SPECIFICATION
 Current Rating: 2 Amp
 Withstand Voltage: 1000V AC For 1 Minute
 Contact Resistance: 30 Milliohms Max. At DC 100mA
 Insulation Resistance: 1000 Megaohms Min. At DC 500V
 Operation Temperature: -55°C ~ +105°C
 Housing: PBT+30%G.F.(UL94V-0), Gray
 Contact: Brass, Gold Flash On Contact Area,
 Tin Plated On Solder Tails, Over Nickel
 RoHS Compliant

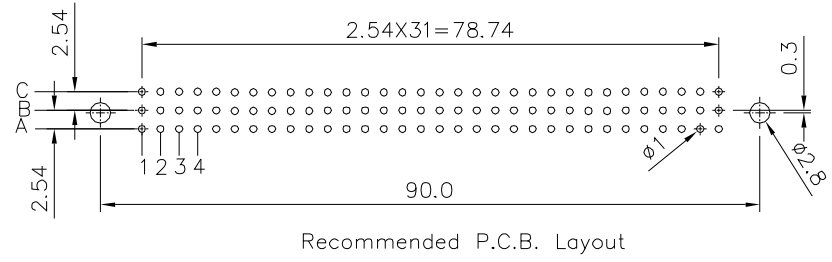

ITEM No.	Pin	Rows With Contacts	Contact Arrange
20406	96	A+B+C	
05620	64	A+C	
05618	32	A	
06992	48	A+B+C	
05619	32	A+C	

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.15 X.* ±3* .XX ±0.10 .X.* ±2* .XXX ±0.05 .XX.* ±1*
20406		MEI		
		CHECKED BY	HZF	
SCALE	NONE	DRAWING BY	CYP	
REV.	B1	UNIT	mm	

NO.	REV.	REVISIONS	CHK	DATE
△ B1		Modify Data	HZF	06/28/2023
△ B0		NEW RELEASE	HZF	03/14/2016