



△ SPECIFICATION


Current Rating:3 Amp
 Voltage Rating:250V AC/RMS 60Hz
 Contact Resistance:20 Milliohms Max. At 1 Amp DC
 Insulation Resistance:1000 Megohms At 500V DC
 Dielectric Withstanding Voltage:1000V AC/RMS 60Hz
 For 1 Minute
 Insulator:PBT+G.F.(UL94V-0),Blue
 Contact:Copper Alloy,Selective Gold Flash Over Nickel
 Shell:Steel,Tin Plated Over Copper
 Metal S.R.:SUS304
 RoHS Compliant

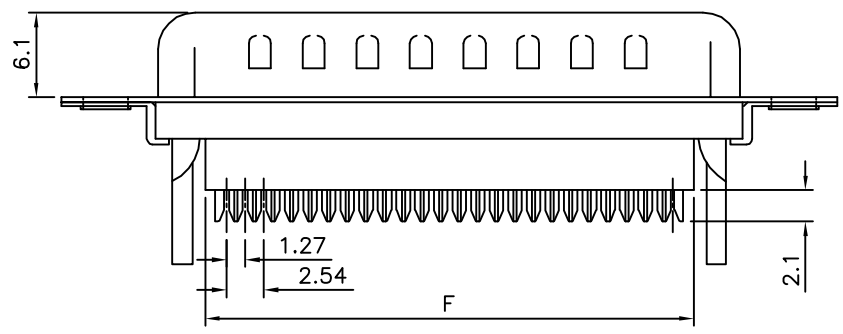


△ Without Insulator Support




△

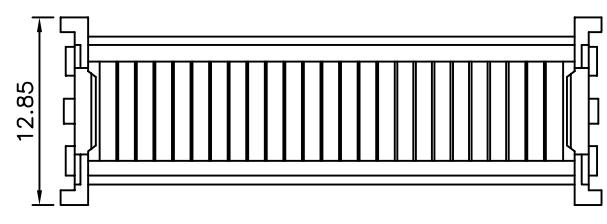

△

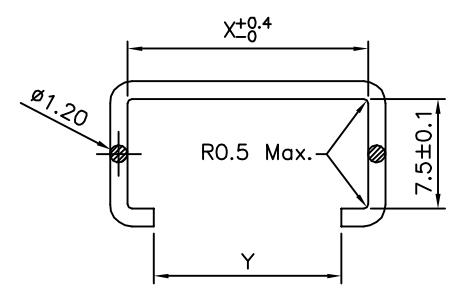

△



△ Cover

Pin	A	B	C	E	F	X	Y
09	30.81	24.99	16.92	11.08	13.10	16.3	12.9 ± 0.1
15	39.20	33.30	25.25	19.39	20.70	24.2	20.8 ± 0.4
25	53.04	47.04	38.96	33.24	33.68	38.6	34.9 ± 0.1
37	69.40	63.50	55.42	49.86	50.30	54.8	51.4 ± 0.1

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ X. ± 0.38 X.* ± 3 .X ± 0.25 .X* ± 1.0 .XX ± 0.13
20466		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		SONG		
SCALE	NONE	REV.	A1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	11/26/2013
△ A0		NEW RELEASE		