





SPECIFICATION

Current Rating:3A
 Withstand Voltage:1000V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operating Temperature:−40°C~+105°C
 Insulator:PA6T(UL94V−O),Black
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 RoHS Compliant

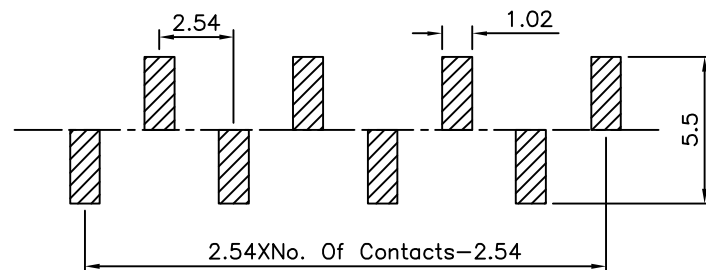

Recommended P.C.B. Layout(Top View)

(PCB Board Tolerance ± 0.05)

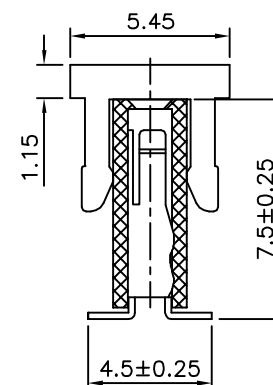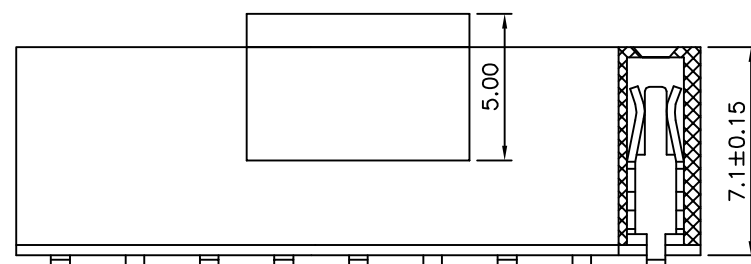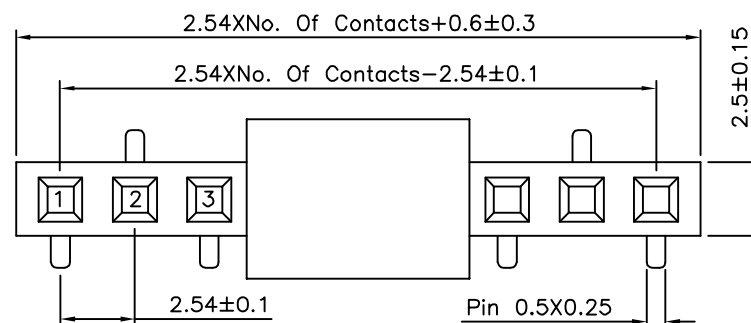

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

20609

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO

REV.

A0

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X: ± 0.25 X: $\pm 2^\circ$
 .X: ± 0.20 .X: $\pm 1.5^\circ$
 .XX ± 0.15 .XX $\pm 1^\circ$
 .XXX ± 0.10 .XXX $\pm 0.5^\circ$

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

A0

NEW RELEASE

HZF

05/12/2014