
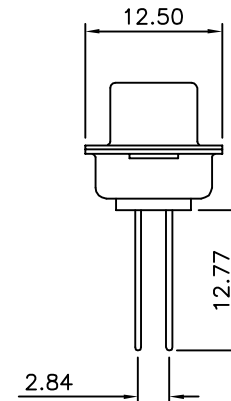
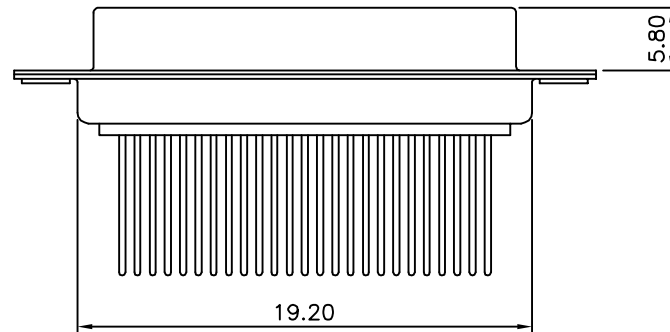
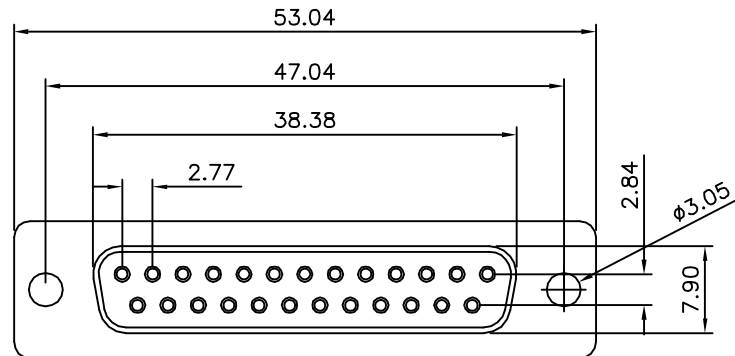


SPECIFICATION

Current Rating:5A
 Withstand Voltage:1000V AC/Minute
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Temperature Range:-55°C~+105°C
 Insulator:PBT+30%G.F.(UL94V-0),White
 Contact:Brass,Gold Flash Over Nickel
 Shell:Steel,Front Shell:Nickel Plated
 Back Shell:Tin Plated
 RoHS Compliant

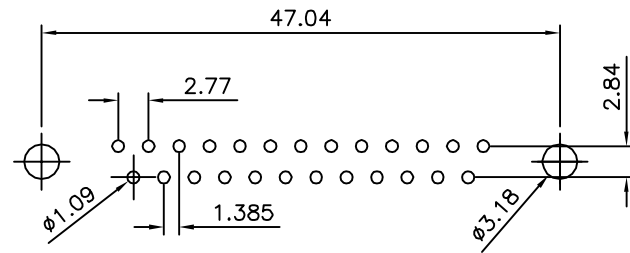

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

20640

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO

REV.

A0

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ±0.50
 XX ±0.30
 XXX ±0.25
 .XXX ±0.15
 ANG. ±2°

UNIT
 mm



NO. REV.

NEW RELEASE

REVISIONS

CHK

DATE

A0

NEW RELEASE

REVISIONS

CHK

DATE

A0

NEW RELEASE

REVISIONS

CHK

DATE

A0

NEW RELEASE

REVISIONS

CHK

DATE