

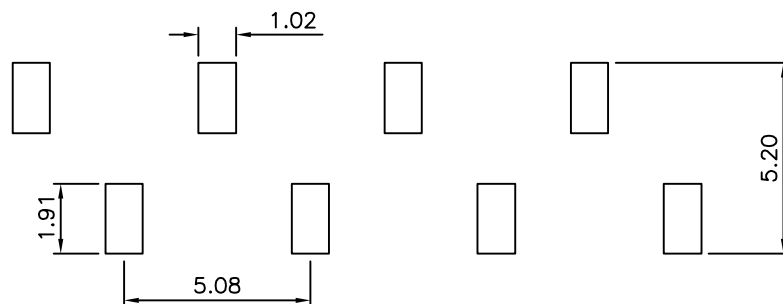
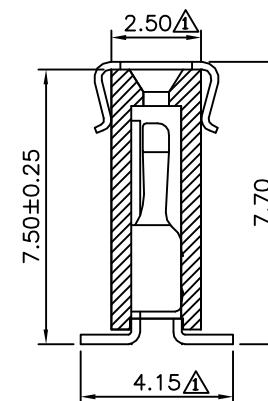


△ SPECIFICATION

Current Rating:3 Amp
Dielectric Withstanding:600V AC/DC
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:20 Milliohms Max.
Operation Temperature:-40°C~+105°C
Contact:Phosphor Bronze,Gold Plated Over Nickel
Insulator:PA6T(UL94V-0),Black
RoHS Compliant

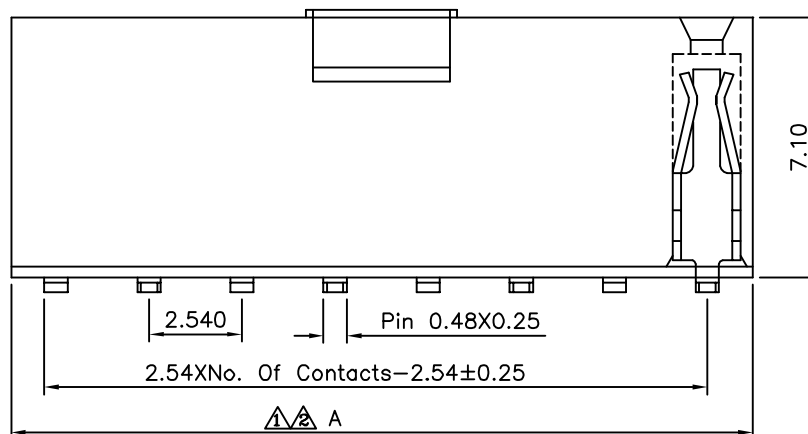

Recommended P.C.B. Layout

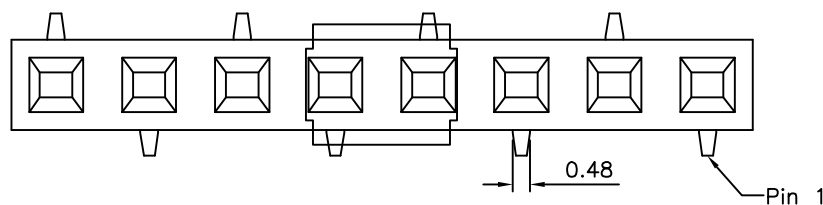

△ Pin	A	Pin	A
02	5.08	22	56.38
03	7.62	23	58.92
04	10.66	24	61.46
05	13.2	25	64.0
06	15.74	26	66.54
07	18.28	27	69.08
08	20.82	28	71.62
09	23.36	29	74.16
10	25.9	30	76.7
11	28.44	31	79.24
12	30.98	32	81.78
13	33.52	33	84.32
14	36.06	34	86.86
15	38.6	35	89.4
16	41.14	36	91.94
17	43.68	37	94.48
18	46.22	38	97.02
19	48.76	39	99.56
20	51.3	40	102.1
21	53.84		

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20763

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.35
.XX ±0.25
.XXX ±0.05

SCALE

NONE

REV.

A2

UNIT

mm



	A2	Modify Data	HZF	06/09/2015
	A1	Modify Data	HZF	08/31/2009
	A0	NEW RELEASE	SHIN	08/14/2006
NO.	REV.	REVISIONS	CHK	DATE