

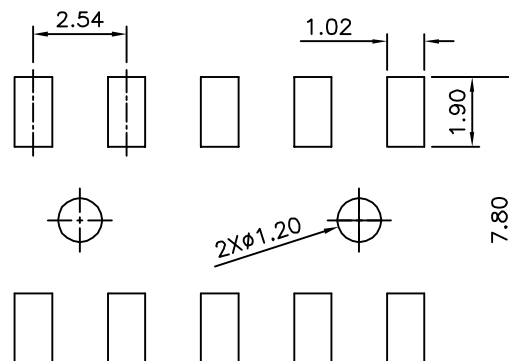
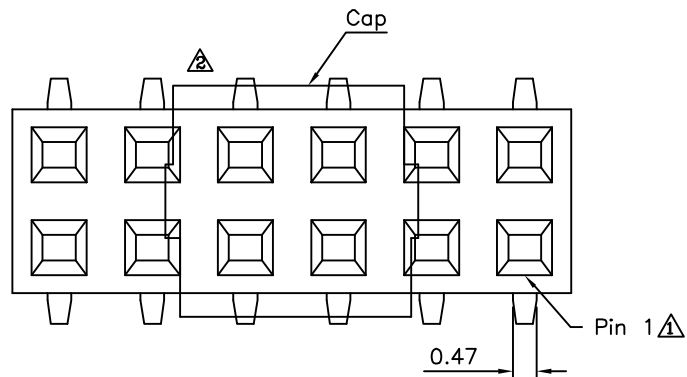


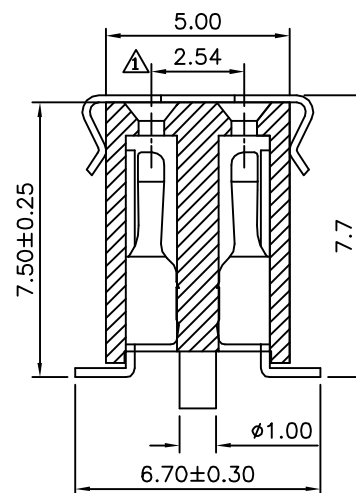

Recommended P.C.B. Layout

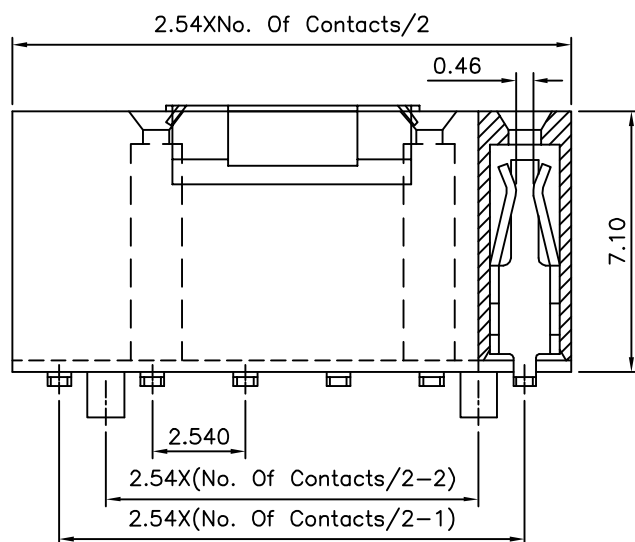

SPECIFICATION

Current Rating:3 Amp
 Insulation Resistance:1000 Megaohms Min.
 Dielectric Withstanding:600V AC/DC
 Contact Resistance:20 Milliohms Max.
 Operation Temperature:-40°C~+105°C
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 Insulator:LCP(UL94V-0),Black
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

20765

APPROVED BY
 EMILY

CHECKED BY
 HZF

DRAWING BY
 YBL

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ±0.50
 .X ±0.35
 .XX ±0.25
 .XXX ±0.05

SCALE NONE

REV. A2

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
A2		Modify Data	HZF	12/17/2013
A1		Modify Data	HZF	06/24/2010
A0		NEW RELEASE	HZF	12/27/2006