

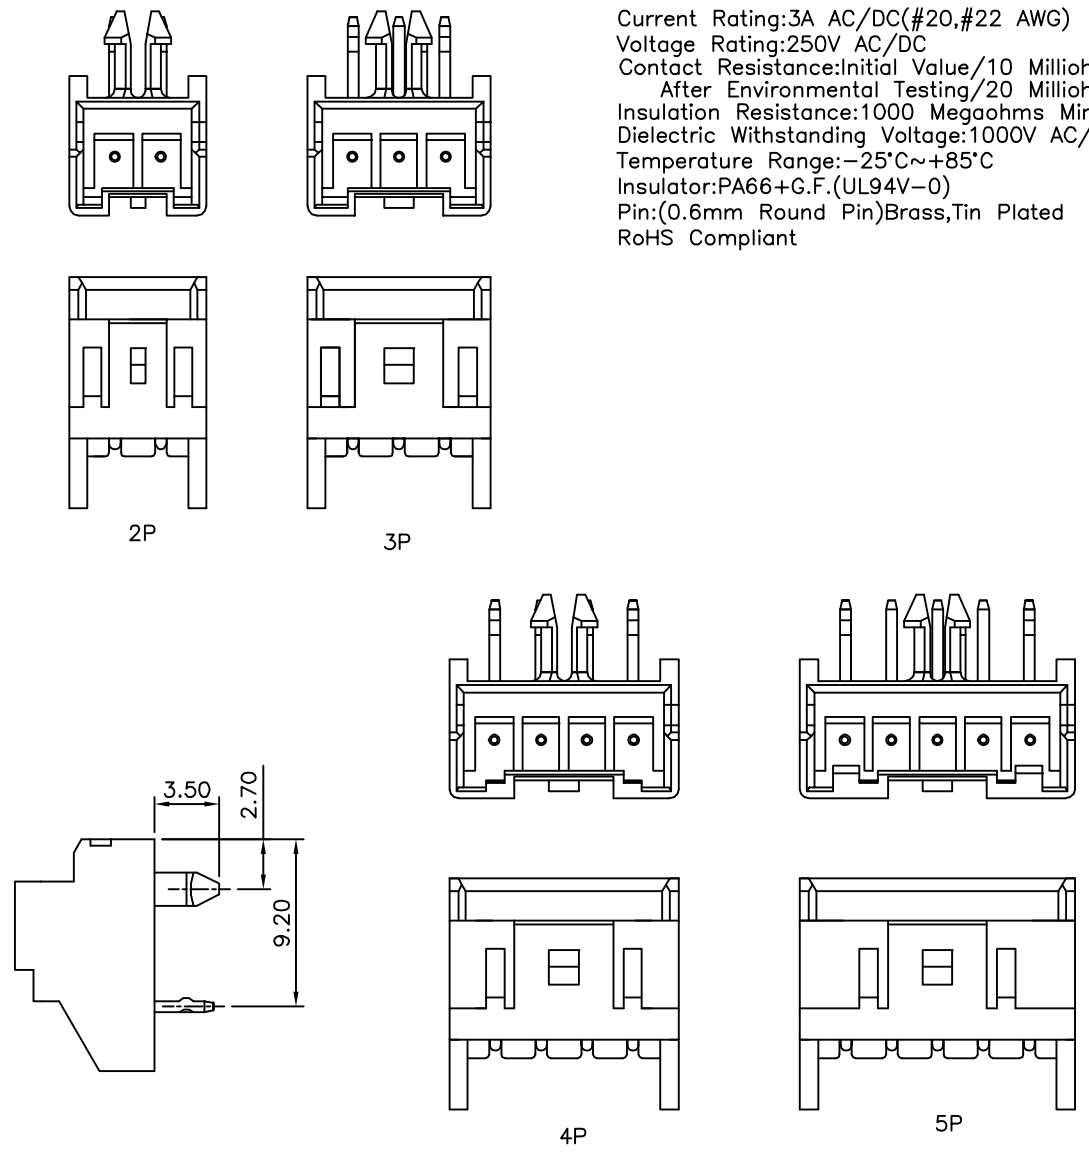
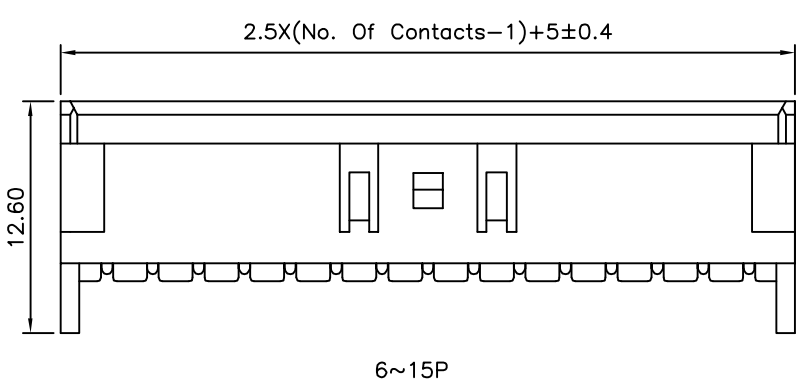
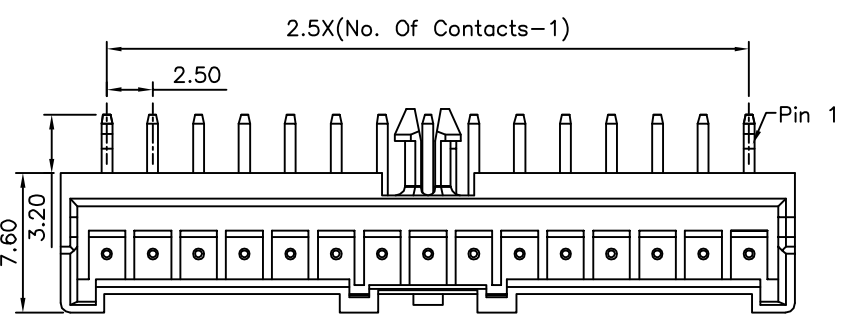


**SPECIFICATION**  
 Current Rating:3A AC/DC(#20,#22 AWG)  
 Voltage Rating:250V AC/DC  
 Contact Resistance:Initial Value/10 Milliohms Max.  
 After Environmental Testing/20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Dielectric Withstanding Voltage:1000V AC/Minute  
 Temperature Range:-25°C~+85°C  
 Insulator:PA66+G.F.(UL94V-0)  
 Pin:(0.6mm Round Pin)Brass,Tin Plated  
 RoHS Compliant

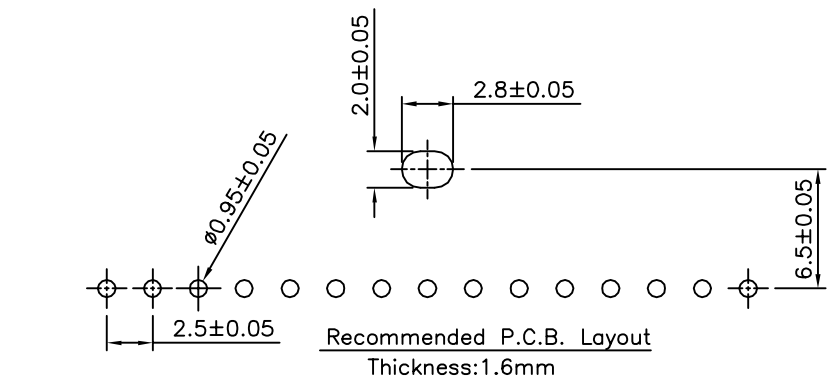

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.08
20879		MEI		
		CHECKED BY	HZF	
		DRAWING BY	CYP	
SCALE	NONE	REV.	A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	06/05/2016