



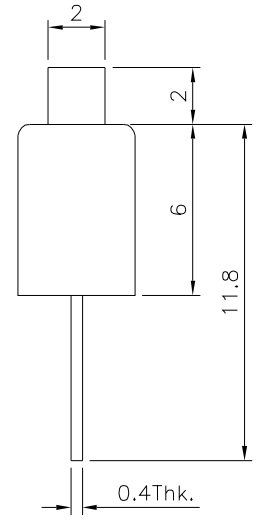


△ SPECIFICATION

Rating:0.3A 50V DC
 Circuit:SPDT
 Timing:Shorting
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:100 Megaohms Min. At 500V DC
 Withstand Voltage:500V AC For 1 Minute
 Life:10000 Cycles
 Operating Temperature:-16°C~+60°C
 Operating Force:350±100gf
 Actuator:POM,Black
 Frame:Steel,Black
 Terminal:Brass,Silver Plated
 Contact(Clip):Phosphor Bronze,Silver Plated Over Nickel
 Base:Phenolic,Nature
 RoHS Compliant

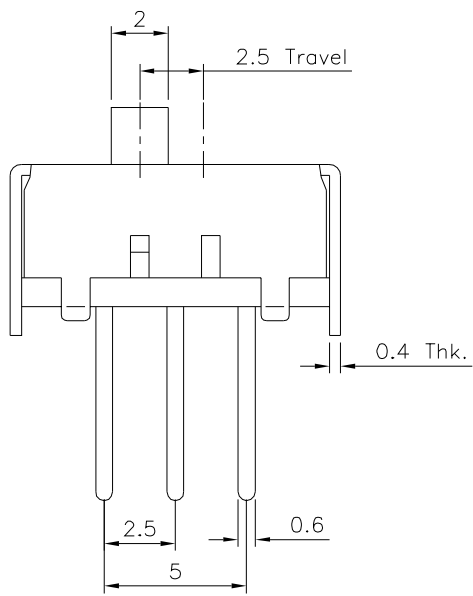

Recommended P.C.B. Layout

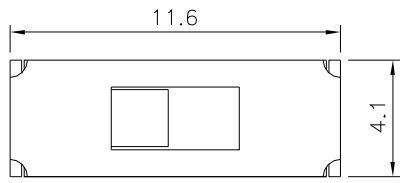

Schematic

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.3 .XX ±0.2 ANG.
20967		MEI		
		CHECKED BY	HZF	
SCALE	NONE	DRAWING BY	SONG	
		REV.	A1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	12/11/2020
△ A0		NEW RELEASE	HZF	07/19/2016