

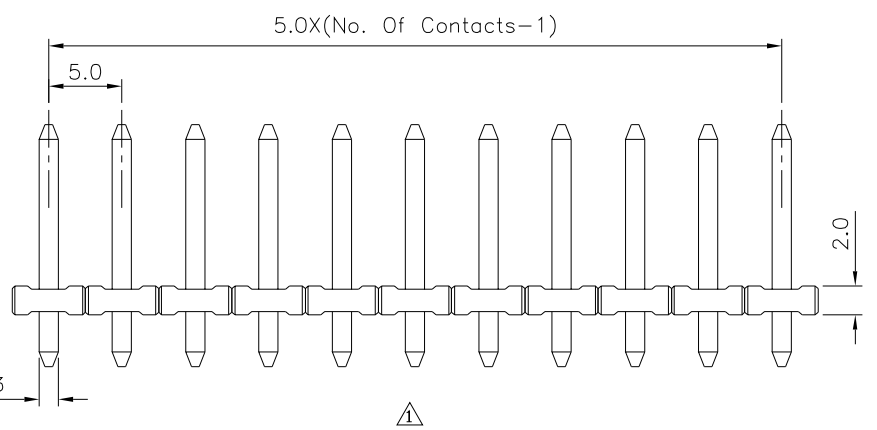


Recommended P.C.B. Layout

SPECIFICATION
 Current Rating: 10Amp/Way Max.
 Voltage Rating: 300V AC
 Withstand Voltage: 2500V AC/Minute, Test Time=60 Sec./PCS
 Operation Temperature: -40°C~+105°C
 Soldering Reliability Temperature: 250°C±10°C, 5 Sec. Max.
 Solder Pin: Copper Alloy, Tin Plated
 Insulator: Polyamide+G.F.(UL94V-0), Black
 RoHS Compliant

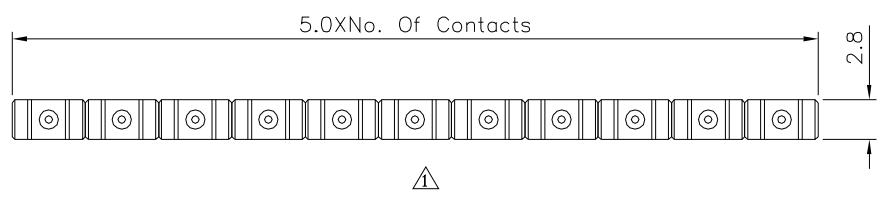

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1°
21005		MEI		
		CHECKED BY HZF		
DRAWING BY CYP		A1		UNIT mm
SCALE	NONE	REV.	A1	

NO.	REV.	REVISIONS	CHK	DATE
△A1		Modify Data	HZF	03/23/2017
△A0		NEW RELEASE	HZF	05/22/2012