



△△△ SPECIFICATION







Signal Contact Current Rating:5 Amp
 Contact Resistance:10 Milliohms Max.
 Dielectric Withstanding Voltage:1000V AC
 For 1 Minute
 Insulation Resistance:5000 Megaohms Min.
 Operating Temperature:-55°C~+125°C
 Metal Shell:Steel,Tin Plated Over Nickel
 Insulator:PBT+30%G.F.(UL94V-0),White
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

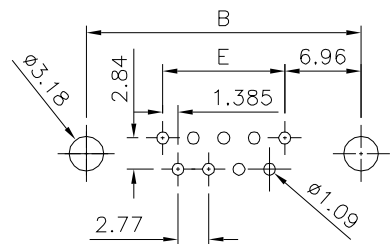

Recommended P.C.B. Layout

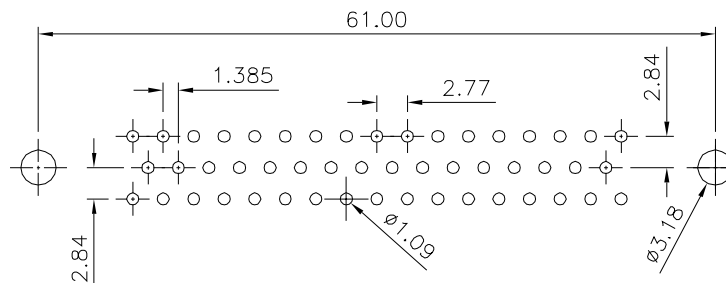

△ Recommended P.C.B. Layout

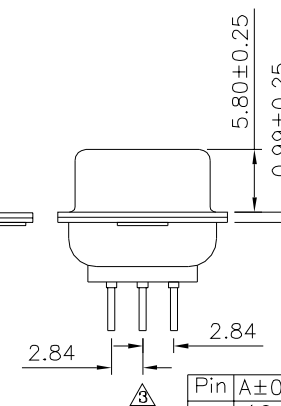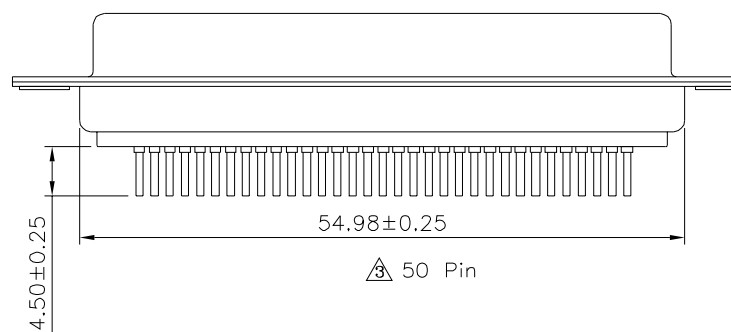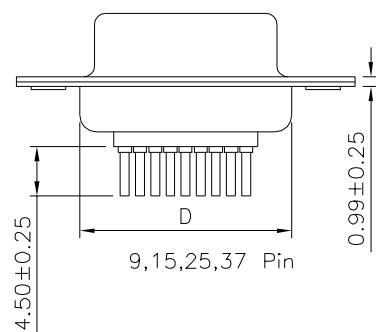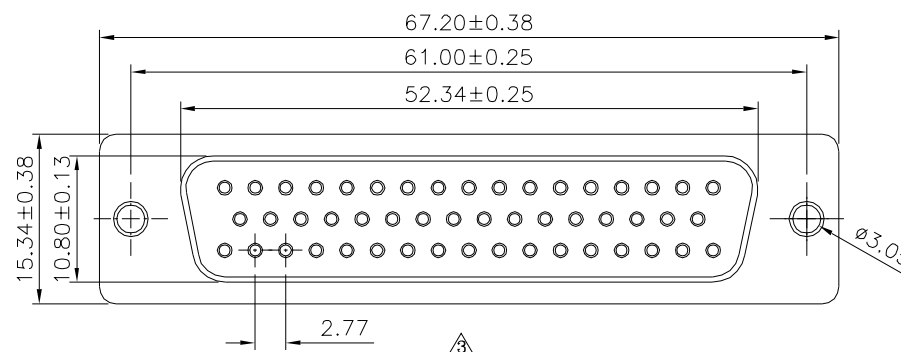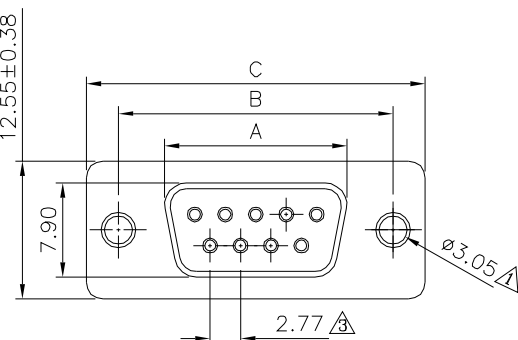

Pin	A±0.25	B±0.13	C±0.38	D±0.25	E±0.25
9	16.33	24.99	30.81	19.28	11.08
15	24.66	33.32	39.14	27.51	19.39
25	38.38	47.04	53.04	41.28	33.24
37	54.84	63.50	69.32	57.71	49.86

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

21047

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.3
 .XX ±0.3
 .XXX ±0.3
 ANG. ±2°

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△	A3	Modify Data	HZF	02/24/2017
△	A2	Modify Data	HZF	04/03/2014
△	A1	Modify Data	HZF	10/05/2011
△	A0	NEW RELEASE	HZF	10/02/2007