


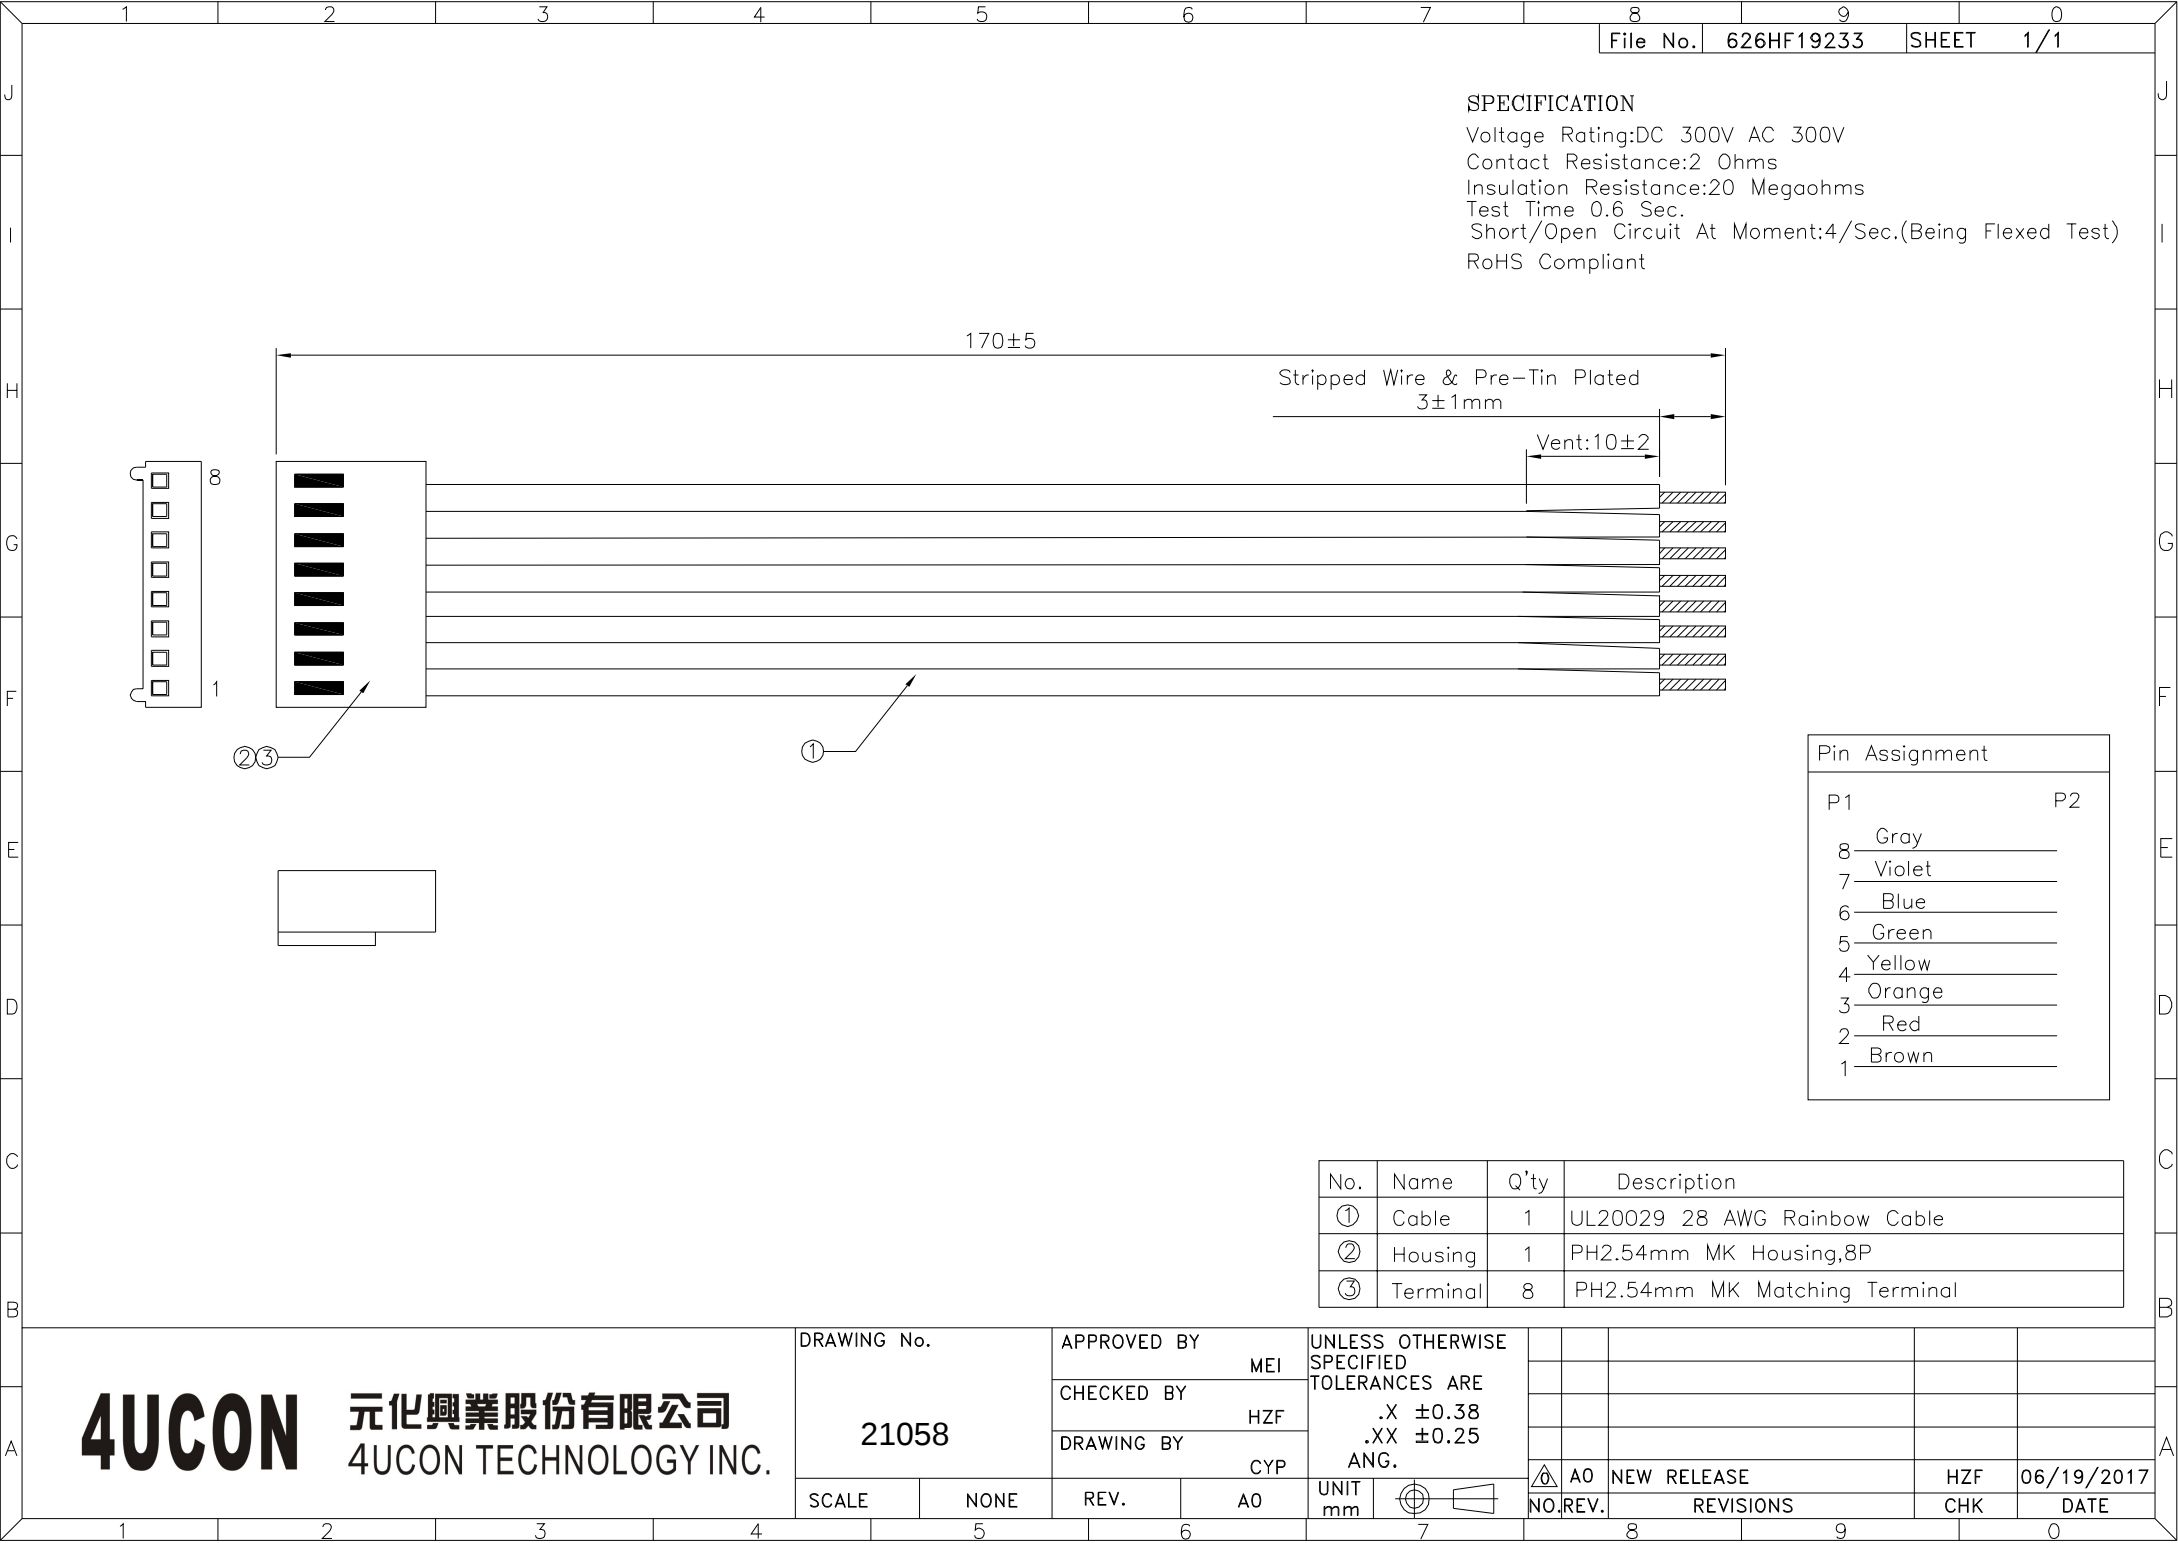

SPECIFICATION

Voltage Rating:DC 300V AC 300V
Contact Resistance:2 Ohms
Insulation Resistance:20 Megaohms
Test Time 0.6 Sec.
Short/Open Circuit At Moment:4/Sec.(Being Flexed Test)
RoHS Compliant

Pin Assignment	
P1	P2
8	Gray
7	Violet
6	Blue
5	Green
4	Yellow
3	Orange
2	Red
1	Brown

No.	Name	Q'ty	Description
①	Cable	1	UL20029 28 AWG Rainbow Cable
②	Housing	1	PH2.54mm MK Housing,8P
③	Terminal	8	PH2.54mm MK Matching Terminal

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		MEI	
		CHECKED BY	
21058		HZF	
		DRAWING BY	
		CYP	
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.						
UNIT	mm	△ A0	NEW RELEASE	HZF	06/19/2017	
NO.	REV.	REVISIONS		CHK	DATE	