
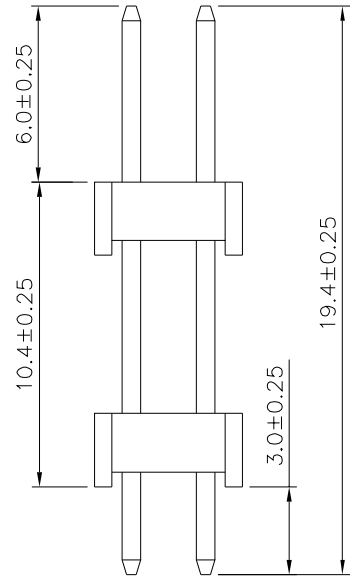
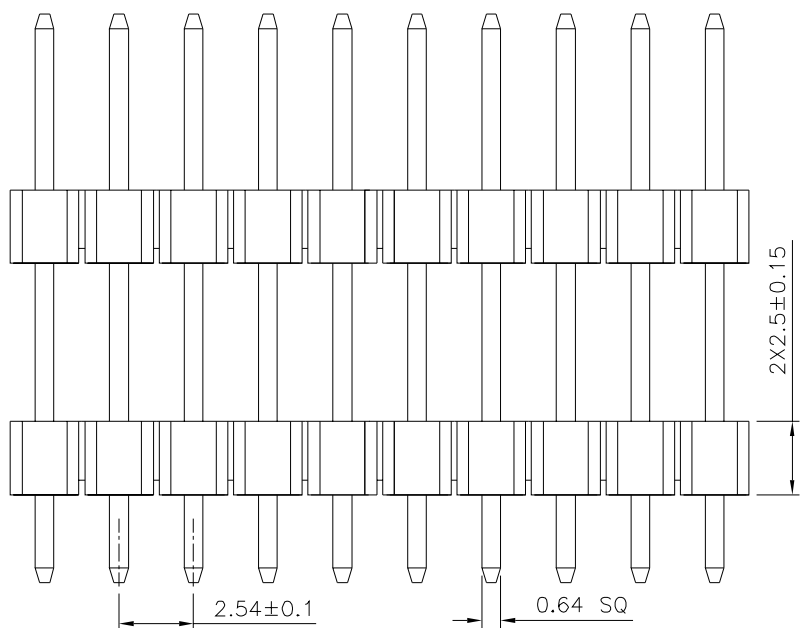


Recommended P.C.B. Layout (Top View)  
(PCB Board Tolerance ±0.05)

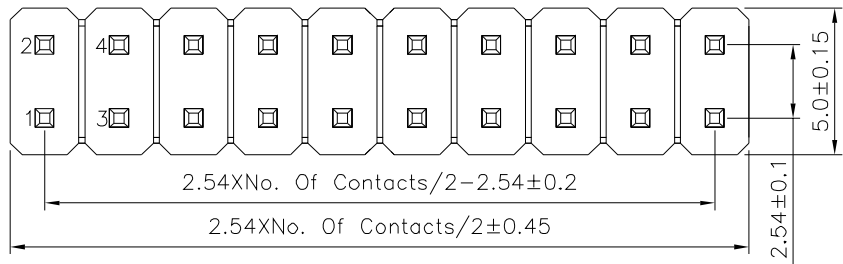

SPECIFICATION

Current Rating: 3A  
 Withstand Voltage: 1000V AC  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Operation Temperature: -40°C ~ +105°C  
 Housing: PBT (UL94V-0), Black  
 Contact: Brass, Gold Flash Over Nickel  
 RoHS Compliant

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. 21083  
 SCALE NONE

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY CYP  
 REV. A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 X. ±0.25 X.\* ±2\*  
 .X ±0.20 .X\* ±1.5\*  
 .XX ±0.15 .XX\* ±1\*  
 .XXX ±0.10 .XXX\* ±0.5\*  
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	02/08/2017