


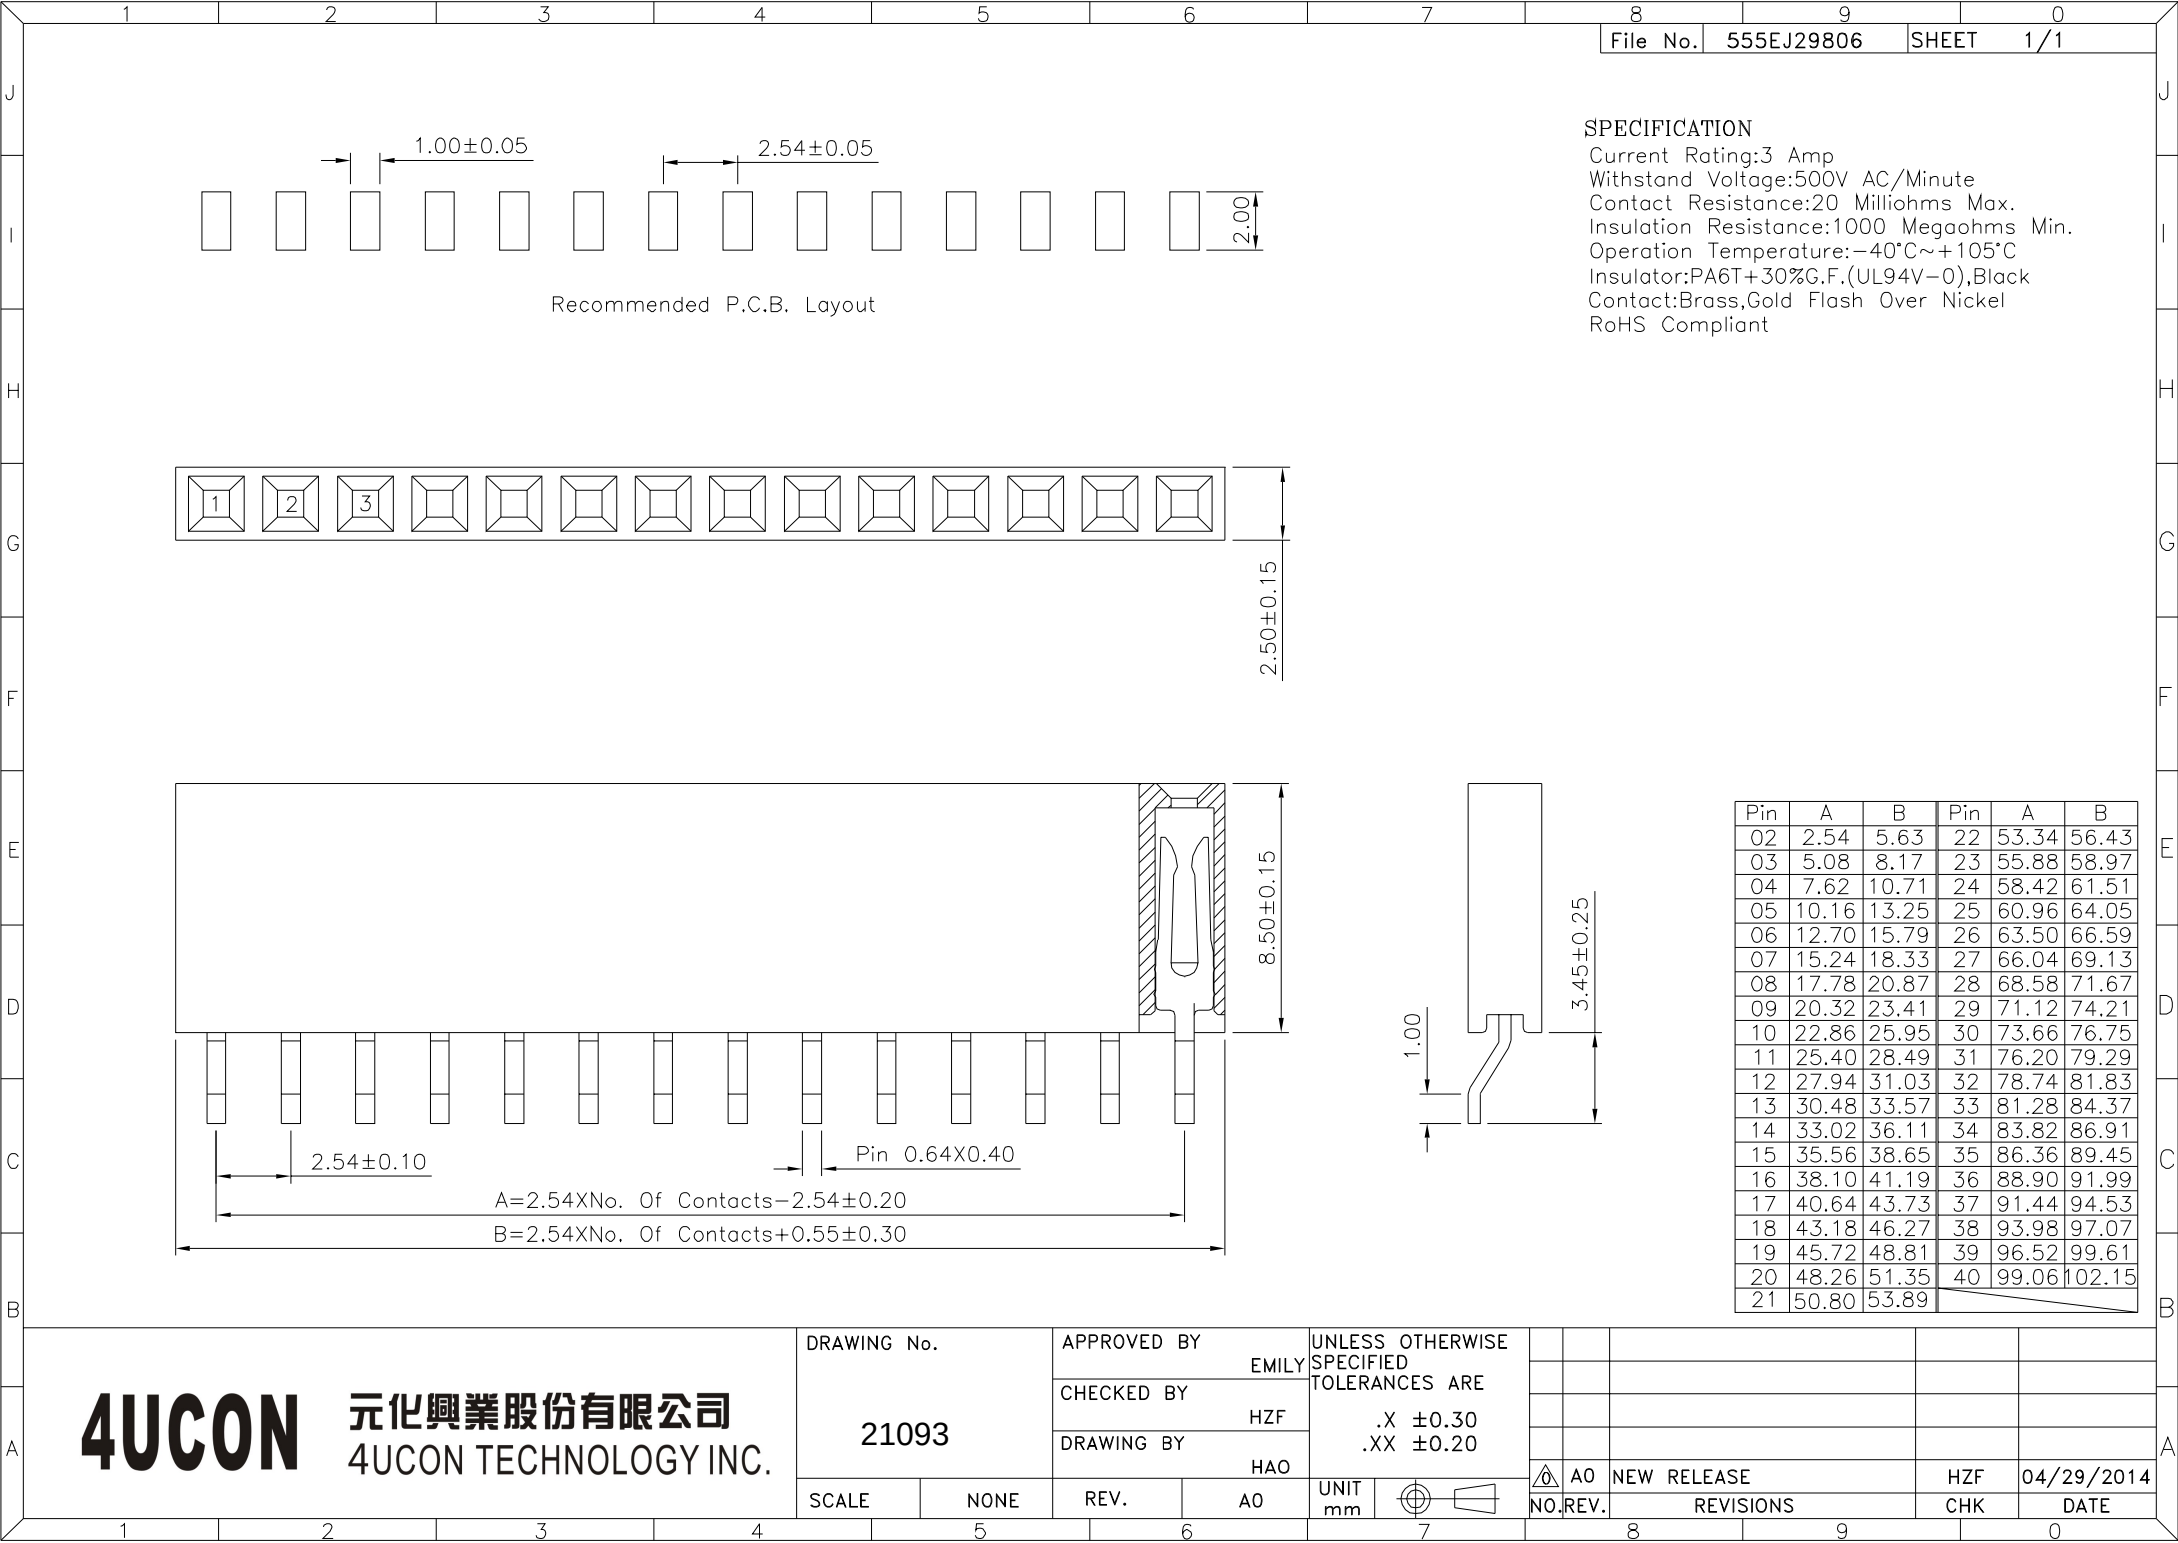

SPECIFICATION
Current Rating:3 Amp
Withstand Voltage:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Insulator:PA6T+30%G.F.(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 21093
APPROVED BY EMILY
CHECKED BY HZF
DRAWING BY HAO
SCALE NONE REV. A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.30
.XX ±0.20
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△A0		NEW RELEASE	HZF	04/29/2014