
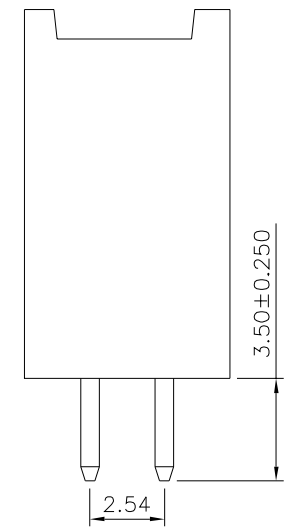
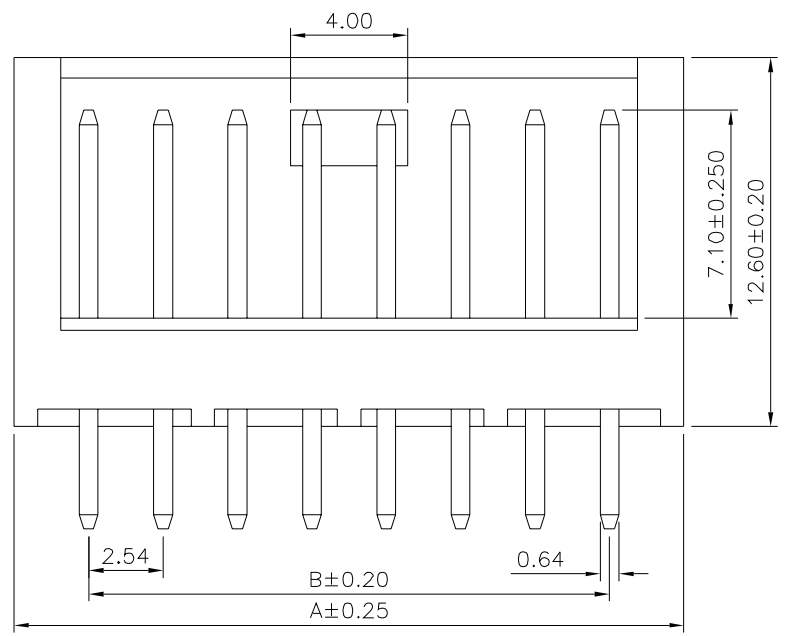


Recommended P.C.B. Layout  
(PCB Board Tolerance ±0.05)

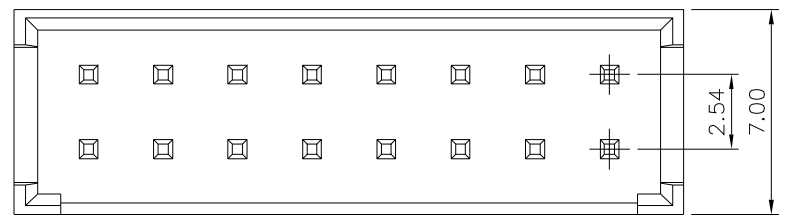

**SPECIFICATION**

Current Rating: 3.0 Amp  
 Withstand Voltage: 1000V AC/Minute  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Operation Temperature: -40°C ~ +105°C  
 ⚠ Contact: Brass, Tin Plated Over Nickel  
 Insulator: PA9T+30%G.F.(UL94V-0), Black  
 RoHS Compliant

Pin	A	B
8	12.70	7.62
12	17.78	12.70
16	22.86	17.78
18	25.40	20.32
24	33.02	27.94
30	40.64	35.56
36	48.26	43.18
44	58.42	53.34

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°
21103		MEI		
		CHECKED BY	HZF	
		DRAWING BY	CYP	
SCALE	NONE	REV.	A1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠	A1	Modify Data	HZF	01/26/2021
⚠	A0	NEW RELEASE	HZF	01/28/2017