
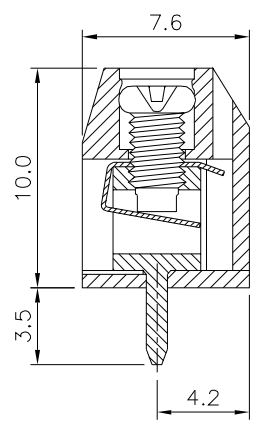
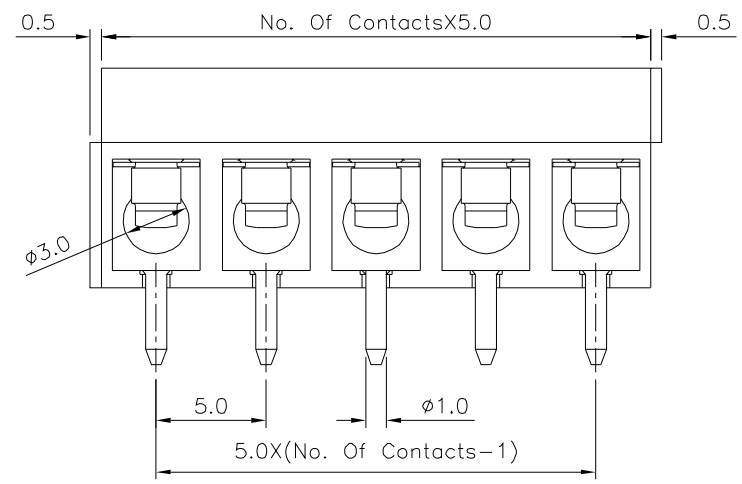


Recommended P.C.B. Layout

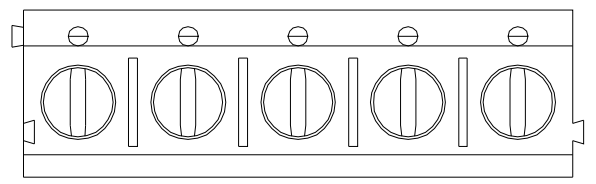

**△ SPECIFICATION**

- Voltage Rating:250V AC
- Current Rating:15 Amps/Way Max.
- Contact Resistance:20 Milliohms Max.
- Withstanding Voltage:2500V AC(1 Minute) Test  
Time=60 Sec/1 PCS
- Wire Range:14~24 AWG
- △ Torque:4.0 Kgf.cm/M2.5
- Operation Temperature:-40°C~+105°C
- Soldering Reliability:  
Test Temperature=250°C±10°C/5 Seconds Max.
- Terminal:Copper Alloy,Tin Plated
- Screw:Steel,Galvanized With Cr3+ Plated
- Wire Guard:Stainless Steel
- △ Insulator Body(Housing):Polyamide(UL94V-0),Blue  
RoHS Compliant

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No. 21322  
SCALE NONE

APPROVED BY EMILY  
CHECKED BY HZF  
DRAWING BY SONG  
REV. A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
X. ±0.50  
.X ±0.30  
.XX ±0.20  
ANG. ±1°  
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	02/13/2014
△ A1		Modify Data	HZF	12/06/2011
△ A0		NEW RELEASE	HZF	12/09/2009