



△ SPECIFICATION

Voltage Rating:300V AC
Current Rating:10 Amp/Way Max.
Contact Resistance:20 Milliohms Max.
Withstanding Voltage:2500V AC For 1 Minute
Test Time=60Sec./1 PCS



Wire Range:16~30 AWG
Torque:2 Kgf.cm/M2

△ Operation Temperature:-40°C~+105°C
Soldering Reliability:Test Temperature=250°C±10°C
5 Seconds Max.

Contact(Metal Housing):Copper Alloy,Nickel Plated
Solder Pin:Copper Alloy,Tin Plated
Terminal Screw:Steel,Galvanized,Cr3+ Plated
Insulator Body(Housing):Polyamide(UL94V-0),Black
RoHS Compliant

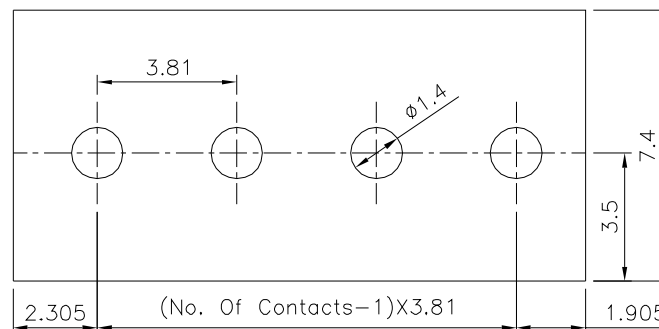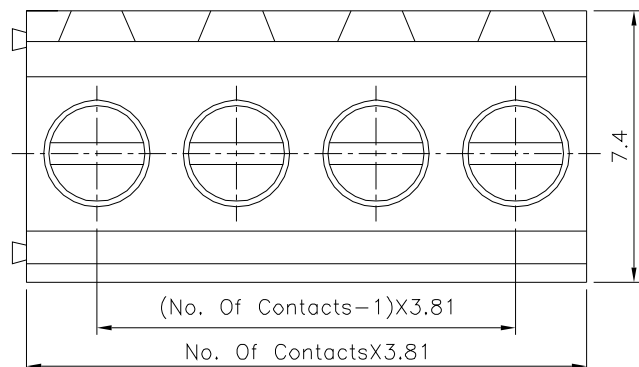

△ Recommended P.C.B. Layout

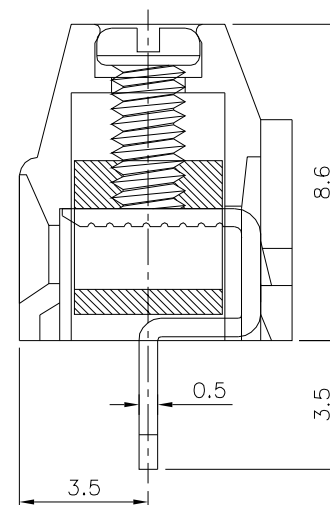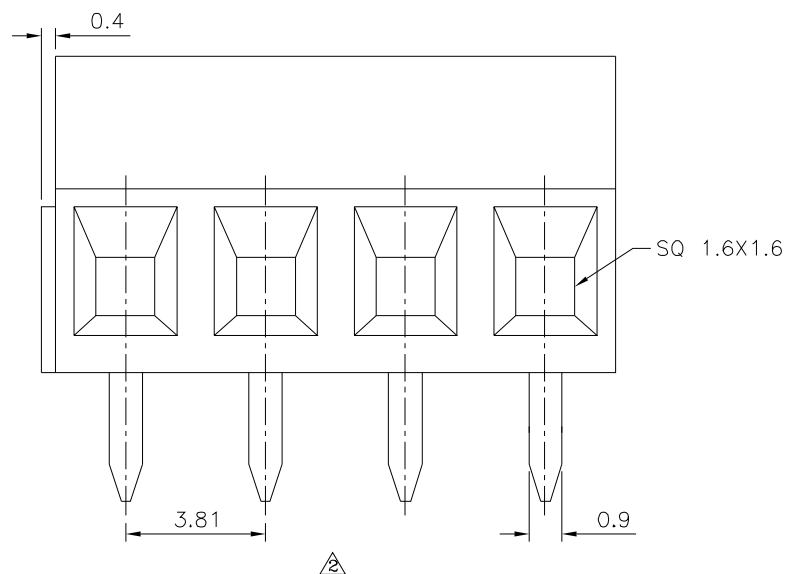

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △

21354

APPROVED BY

EMILY

CHECKED BY


HZF

DRAWING BY

HAO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
ANG. ±1°

UNIT
mm



SCALE

NONE

REV.

A2

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	11/06/2014
△ A1		Modify Data	HZF	07/05/2011
△ A0		NEW RELEASE	HZF	04/15/2010