
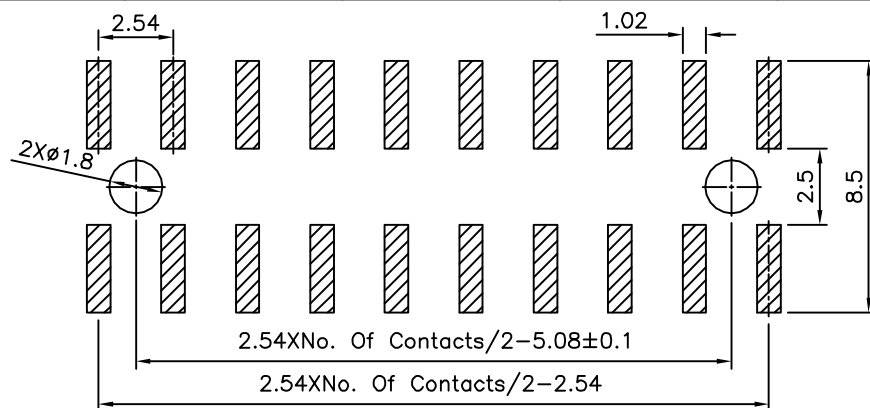
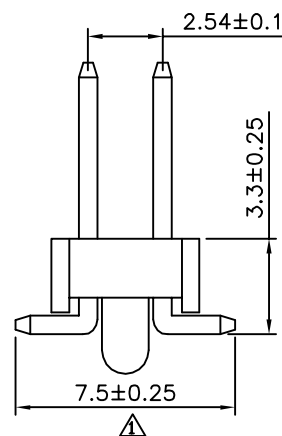
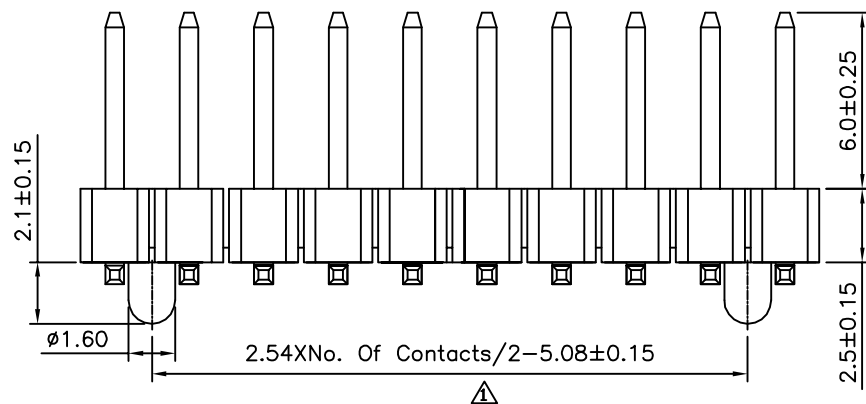


SPECIFICATION

Current Rating:3A
Withstand Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Housing:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

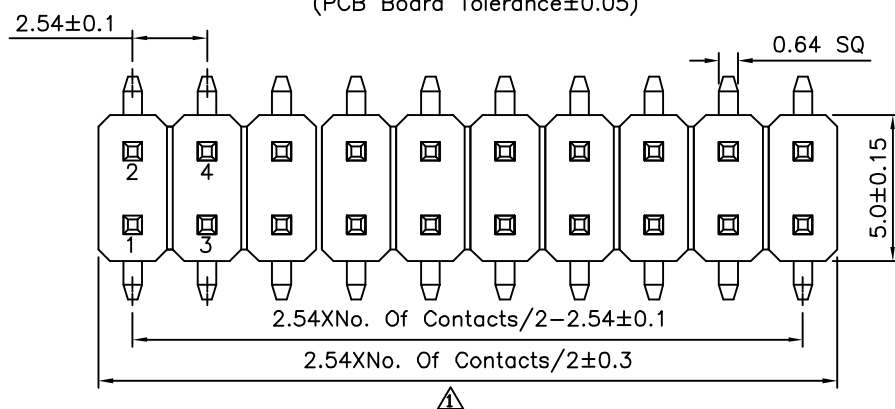

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

**4UCON**

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21369

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SAN

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.25 X.* ±2°
.X ±0.20 .X* ±1.5°
.XX ±0.15 .XX* ±1°
.XXX ±0.10 .XXX* ±0.5°

UNIT

mm

NO. REV.

REVISIONS

CHK

DATE

A1

Modify Data

HZF

04/21/2014

A0

NEW RELEASE

HZF

10/11/2013