

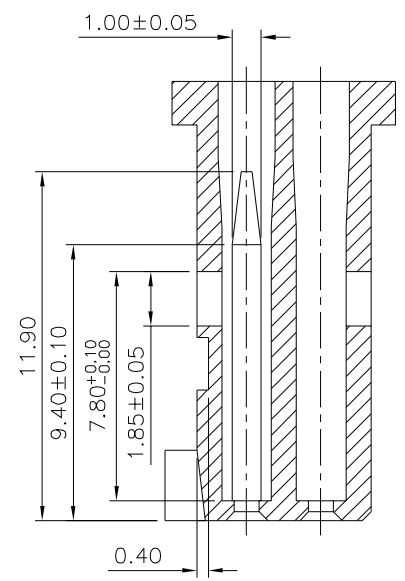
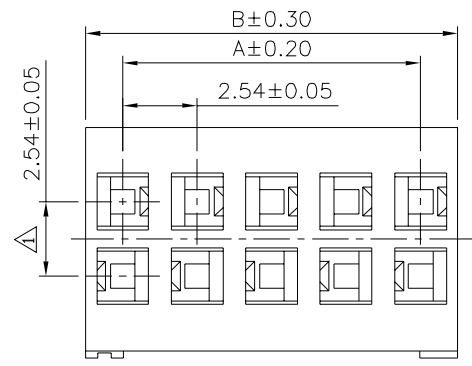


SPECIFICATION
 Current Rating:3.0 Amp
 ⚠ Withstand Voltage:1000V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megohms Min.
 ⚠ Operation Temperature:-25°C~+85°C
 Insulator:PBT+30%G.F.(UL94V-0),Black
 RoHS Compliant

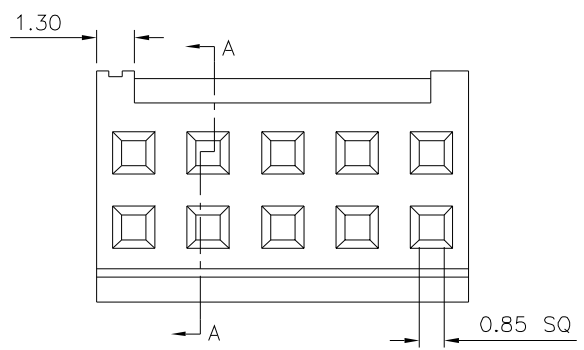

Section A-A

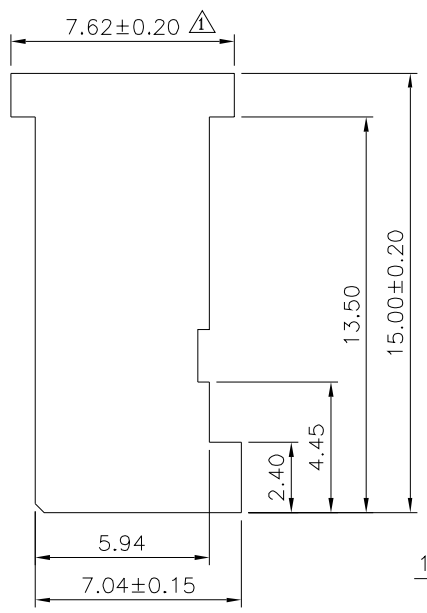

Pin	A	B
04	2.54	5.08
06	5.08	7.62
08	7.62	10.16
10	10.16	12.70
12	12.70	15.24
14	15.24	17.78
16	17.78	20.32
18	20.32	22.86
20	22.86	25.40
24	27.94	30.48
30	35.56	38.10
36	43.18	45.72
40	48.26	50.80

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°
21377		CHECKED BY HZF		
SCALE NONE		DRAWING BY SONG		
REV.	A2	UNIT mm		

NO.	REV.	REVISIONS	CHK	DATE
	A2	Modify Data	HZF	12/28/2016
	A1	Modify Data	HZF	11/19/2013
	A0	NEW RELEASE	HZF	08/08/2011