

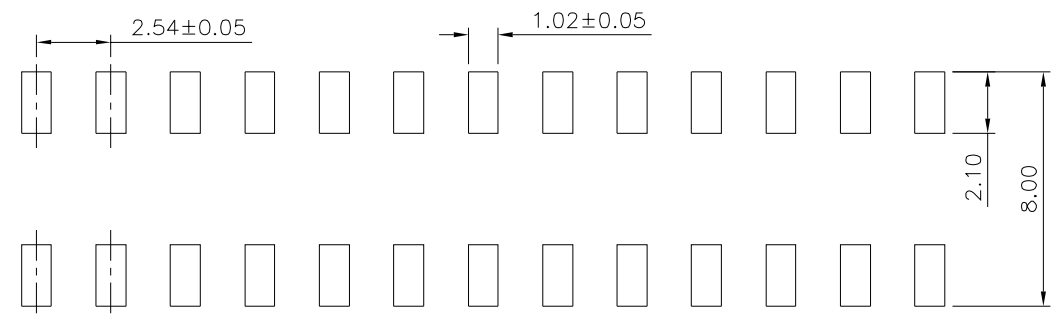



**SPECIFICATION**  
 Current Rating:3 Amp  
 Withstand Voltage:500V AC/Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operation Temperature:-40°C~+105°C  
 Insulator:PA6T+30%G.F.(UL94V-0),Black  
 ⚠ Contact:Phosphor Bronze,Gold Flash Over Nickel  
 RoHS Compliant

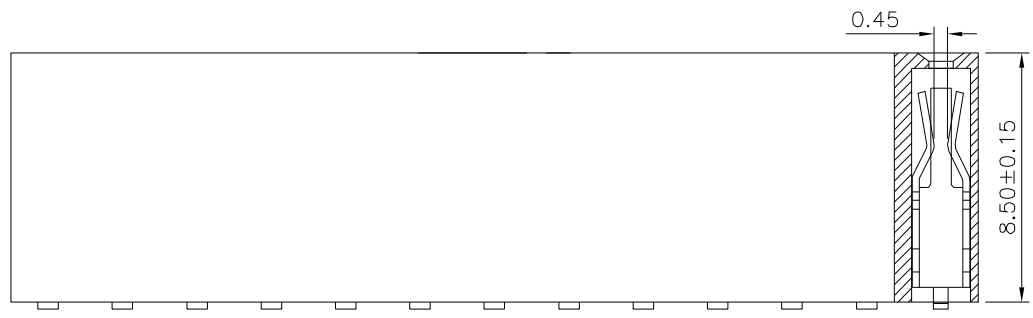

Recommended P.C.B. Layout

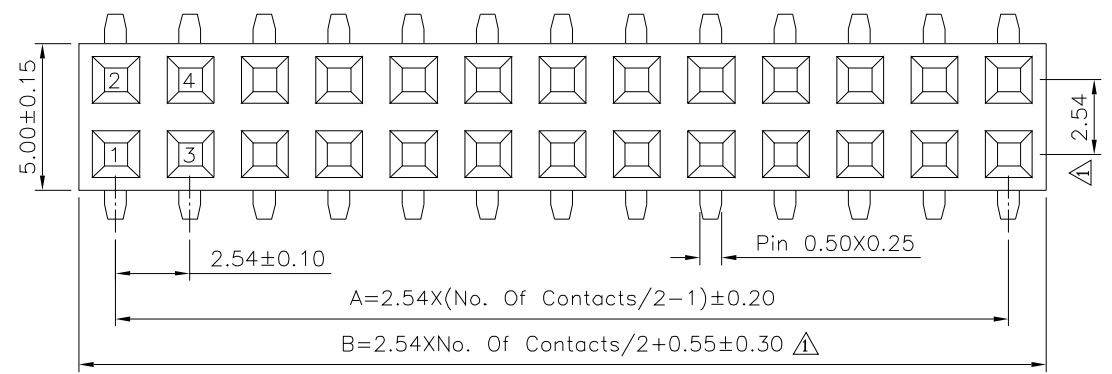

Pin	A	B	Pin	A	B
04	2.54	5.63	44	53.34	56.43
06	5.08	8.17	46	55.88	58.97
08	7.62	10.71	48	58.42	61.51
10	10.16	13.25	50	60.96	64.05
12	12.70	15.79	52	63.50	66.59
14	15.24	18.33	54	66.04	69.13
16	17.78	20.87	56	68.58	71.67
18	20.32	23.41	58	71.12	74.21
20	22.86	25.95	60	73.66	76.75
22	25.40	28.49	62	76.20	79.29
24	27.94	31.03	64	78.74	81.83
26	30.48	33.57	66	81.28	84.37
28	33.02	36.11	68	83.82	86.91
30	35.56	38.65	70	86.36	89.45
32	38.10	41.19	72	88.90	91.99
34	40.64	43.73	74	91.44	94.53
36	43.18	46.27	76	93.98	97.07
38	45.72	48.81	78	96.52	99.61
40	48.26	51.35	80	99.06	102.15
42	50.80	53.89			

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
21382		MEI	
		CHECKED BY	
		HZF	
		DRAWING BY	
		CYP	
SCALE	NONE	REV.	A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.30  
 .XX ±0.20  
 ANG.  
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠ A1		Modify Data	HZF	03/20/2020
⚠ A0		NEW RELEASE	HZF	10/13/2015