
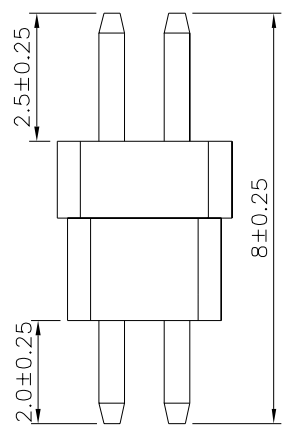
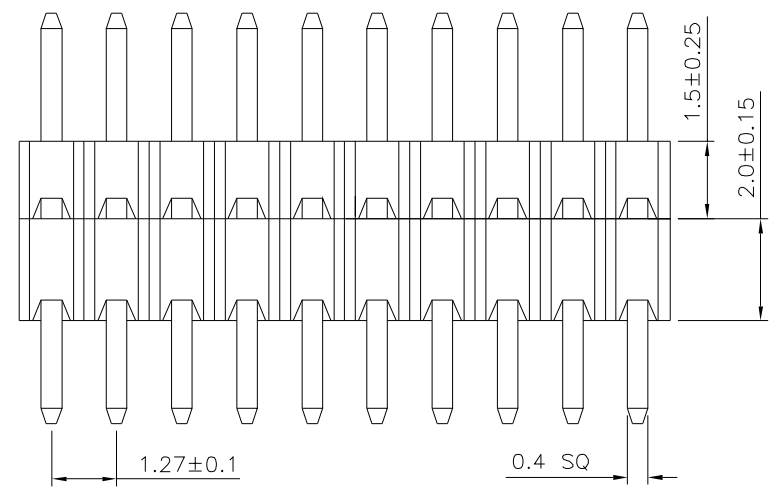


SPECIFICATION

Current Rating: 1 Amp
 Withstand Voltage: 500V AC Min./Minute
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min.
 Operating Temperature: -40°C ~ +105°C
 Insulator: PA6T(UL94V-0), Black
 Contact: Brass, Gold Flash Over Nickel
 RoHS Compliant

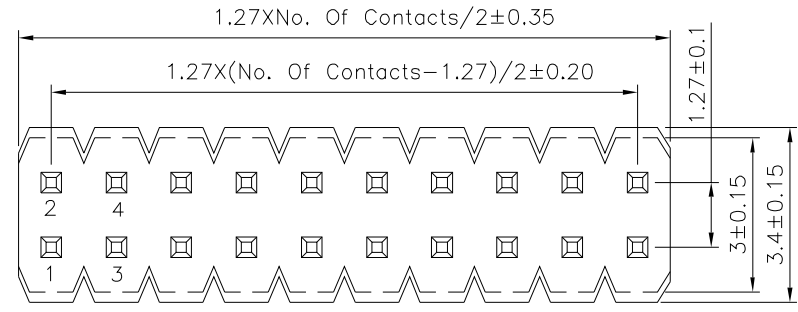

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X.* ±2" .X ±0.20 .X* ±1.5" .XX ±0.15 .XX* ±1" .XXX ±0.10 .XXX* ±0.5"
21466		MEI		
		CHECKED BY HZF		
DRAWING BY CYP		UNIT mm		
SCALE	NONE	REV.	A0	NO. REV.

△ A0	NEW RELEASE	HZF	04/08/2018
NO. REV.	REVISIONS	CHK	DATE