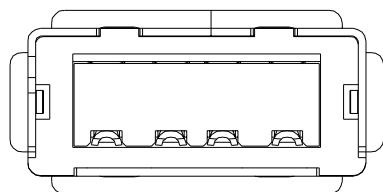
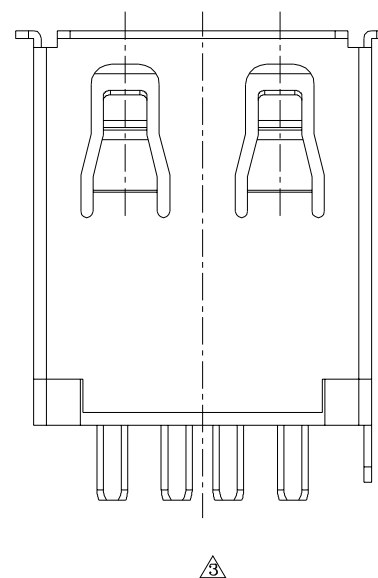
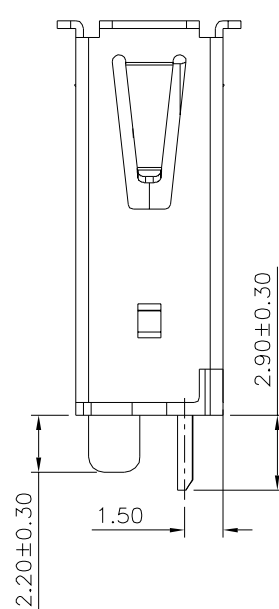
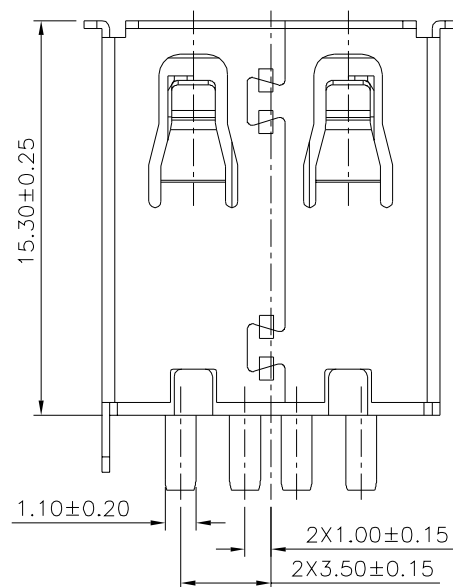
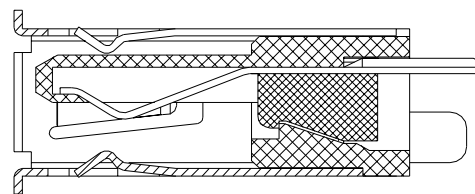
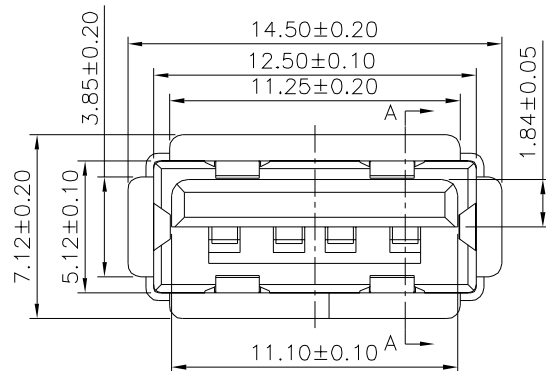


SPECIFICATION

Current Rating:1.5 Amp At 250V AC
Voltage Rating:30V
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:30 Milliohms Max.
Dielectric Withstanding Voltage:500V AC
 Operation Temperature:-40°C~+85°C
Insertion Force:35 Newtons Max.
Extraction Force:10 Newtons Min.
RoHS Compliant

 Section A-A

	No.	Description	Material	Q'ty	Remark
	1	Contact	C2680	4	21513:Gold Flash On Contact Area,Tin Plated On Solder Tails,Over Nickel 21514:Gold Plated 30u" On Contact Area,Tin Plated On Solder Tails,Over Nickel
	2	Housing	PBT,UL94V-0	1	Black
	3	Back Plug	PBT,UL94V-0	1	
	4	Shell	C2680	1	Nickel Plated

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21513

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.


A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.38	X." ±4°
.X ±0.25	.X" ±2°
.XX ±0.20	
.XXX ±0.10	

UNIT

mm

 A3

Modify Data

HZF

06/20/2018

 A2

Modify Data

HZF

01/14/2016

 A1

Modify Data

HZF

11/21/2014

 A0

NEW RELEASE

HZF

03/25/2014

NO.REV.

REVISIONS

CHK

DATE