


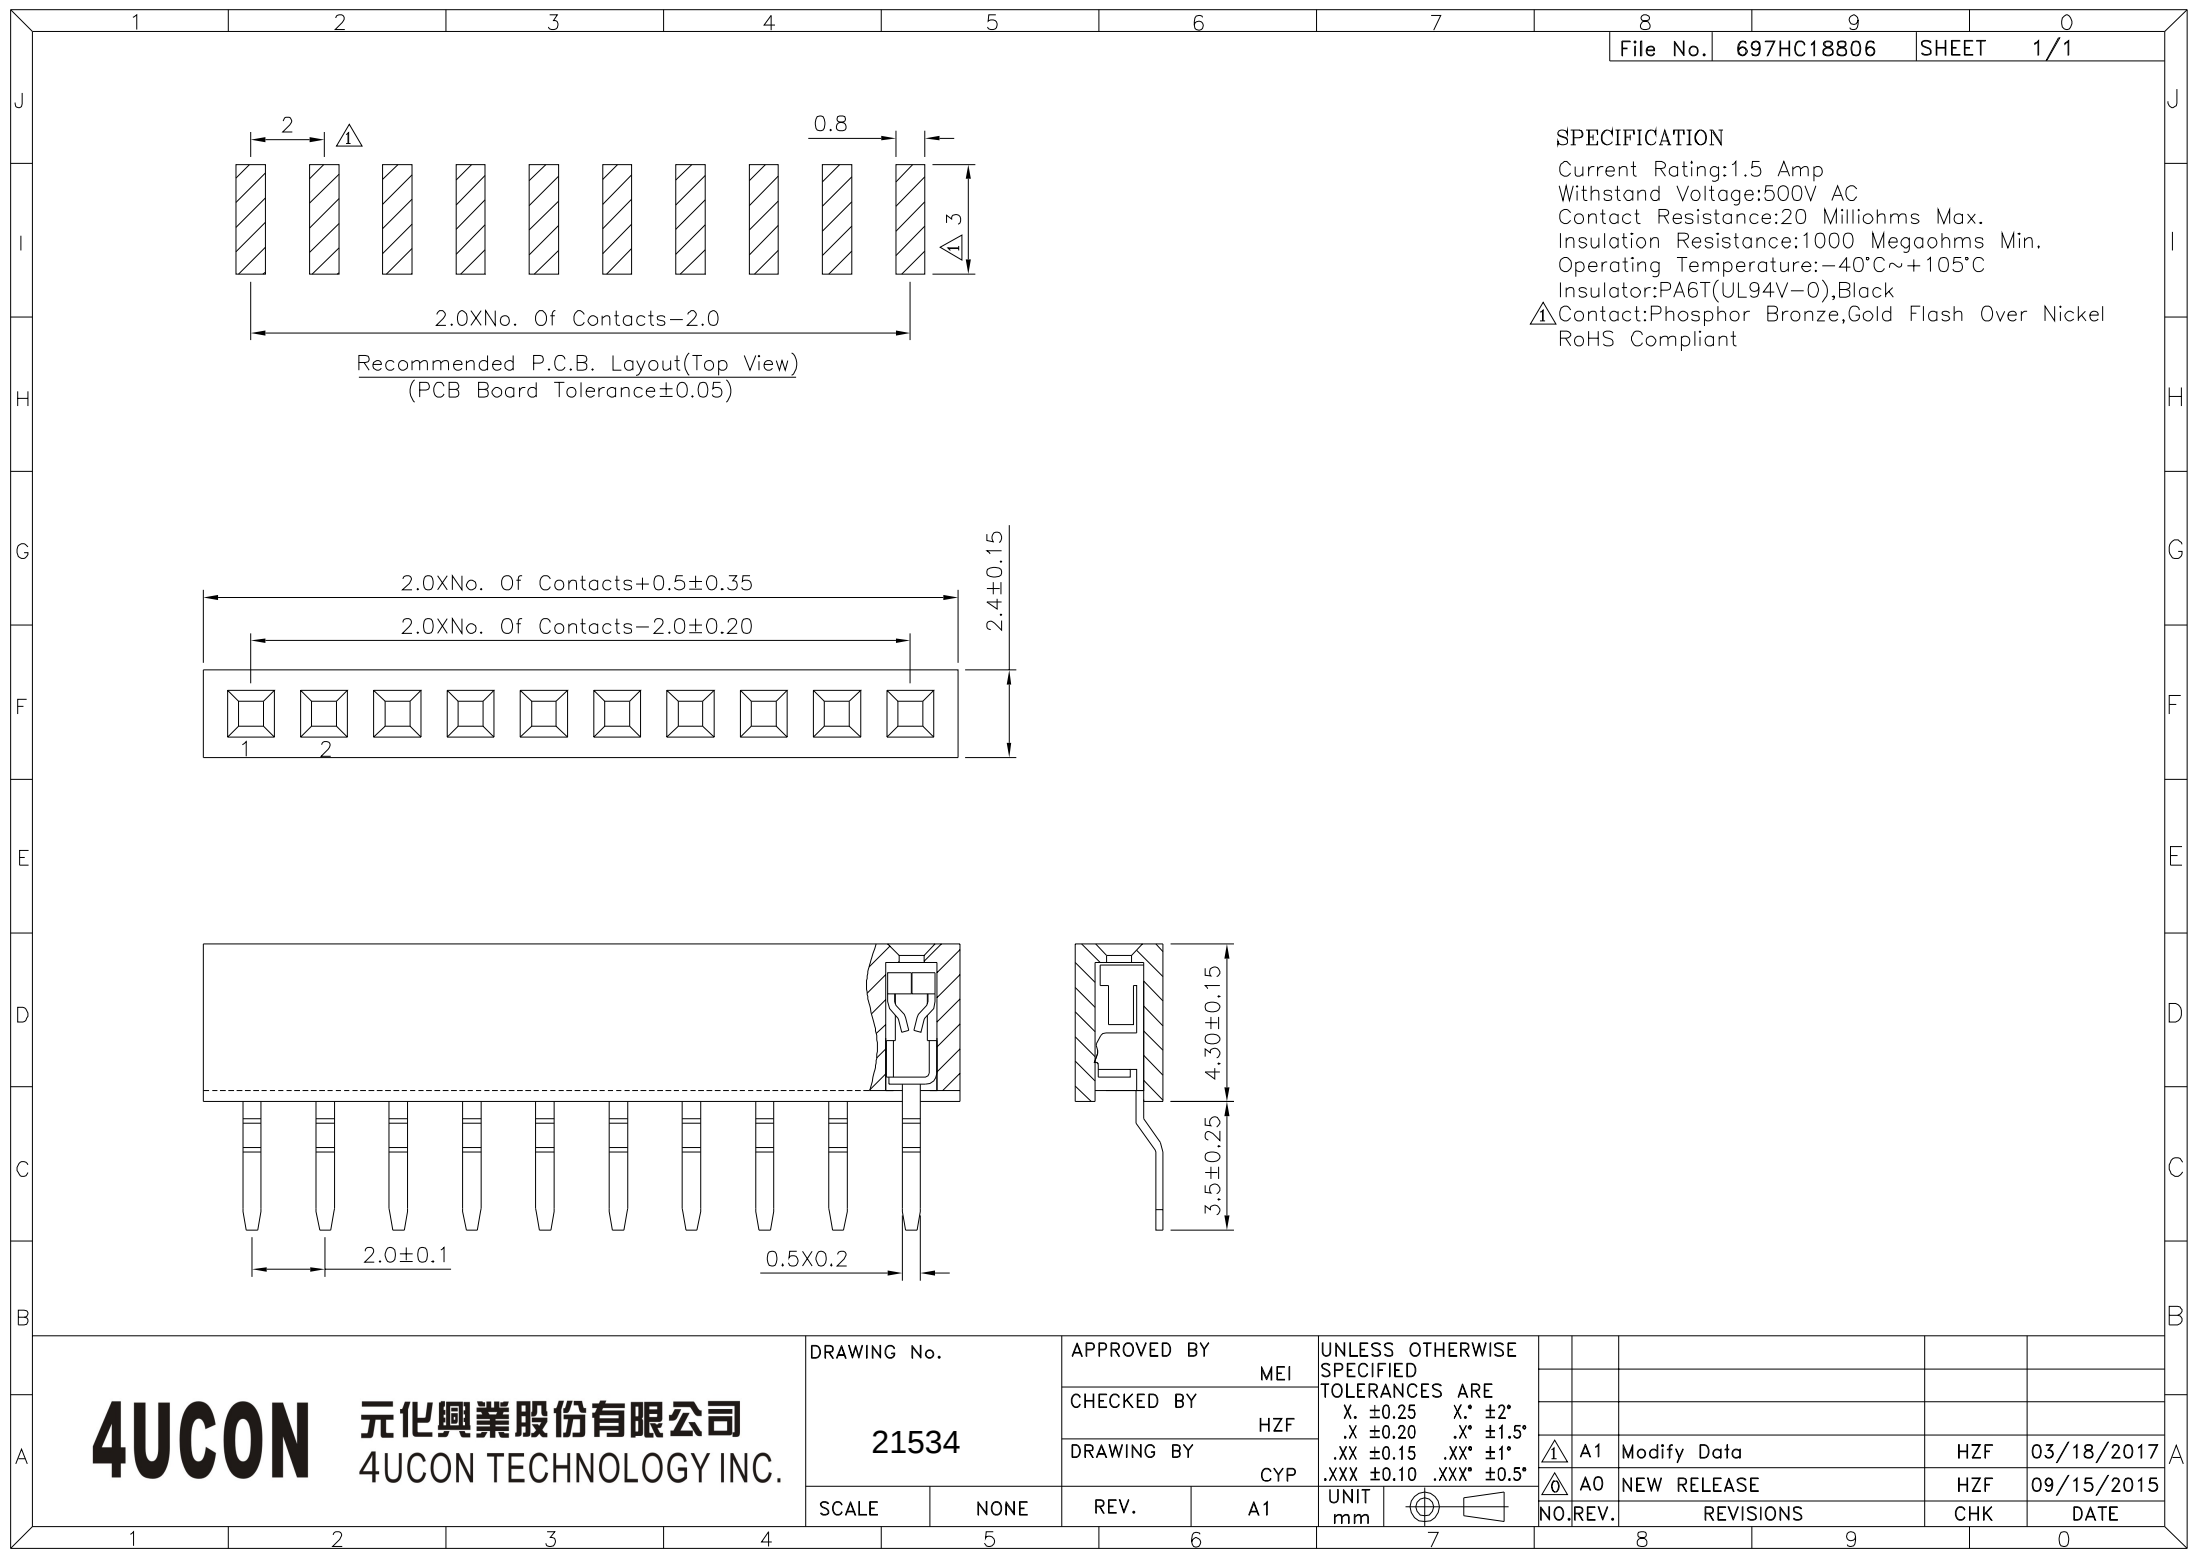

SPECIFICATION

Current Rating:1.5 Amp
Withstand Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Insulator:PA6T(UL94V-0),Black
⚠Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.
21534

APPROVED BY
MEI
CHECKED BY
HZF
DRAWING BY
CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.25 X.* ±2*
.X ±0.20 .X* ±1.5*
.XX ±0.15 .XX* ±1*
.XXX ±0.10 .XXX* ±0.5*

NO.	REV.	REVISIONS	CHK	DATE
⚠A1		Modify Data	HZF	03/18/2017
⚠A0		NEW RELEASE	HZF	09/15/2015

SCALE NONE REV. A1

