
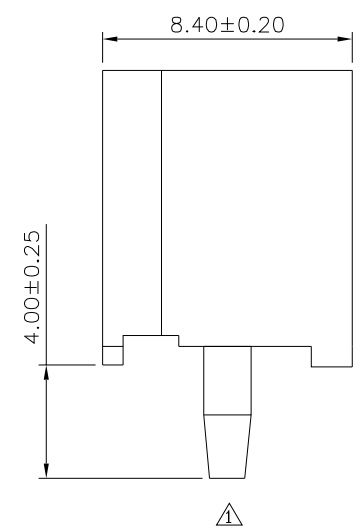
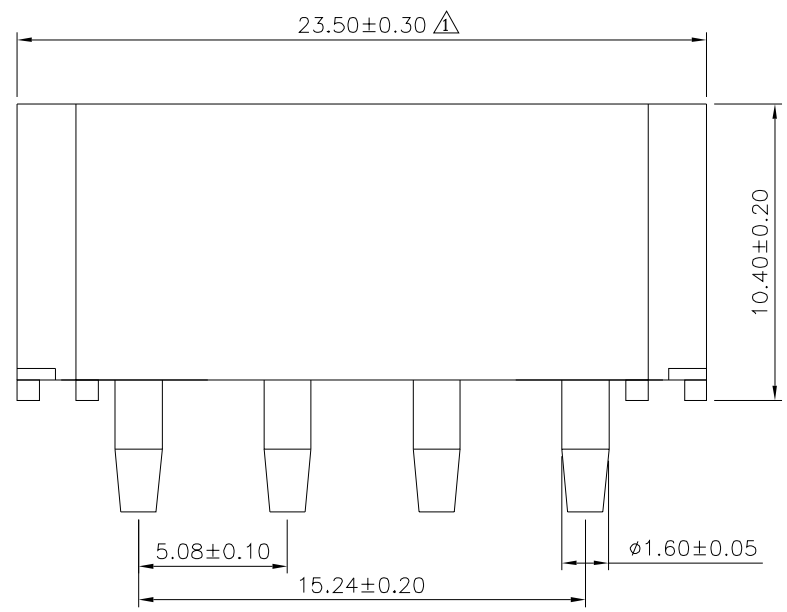


△ SPECIFICATION
 Current Rating:5A AC/DC
 Voltage Rating:250V AC/DC
 Withstanding Voltage:1500V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Temperature Range:-25°C~+85°C
 Insulator:PA66(UL94V-2),Nature
 Pin:Brass,Tin Plated
 RoHS Compliant

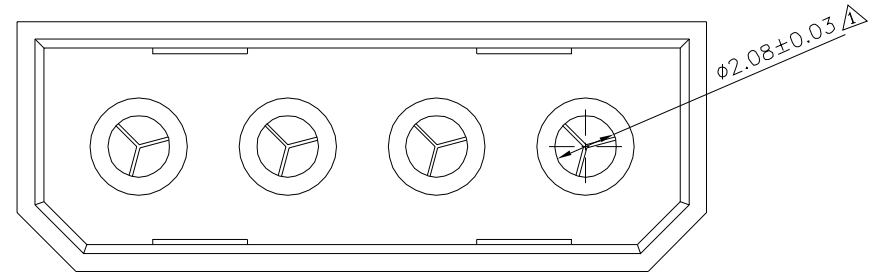

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. \triangle
 21595

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 \triangle X. ± 0.30
 .X ± 0.25
 .XX ± 0.20
 .XXX ± 0.05
 ANG. $\pm 1^\circ$

SCALE NONE REV. A1

NO.	REV.	REVISIONS	CHK	DATE
\triangle A1		Modify Data	HZF	12/22/2017
\triangle A0		NEW RELEASE	HZF	03/02/2013