
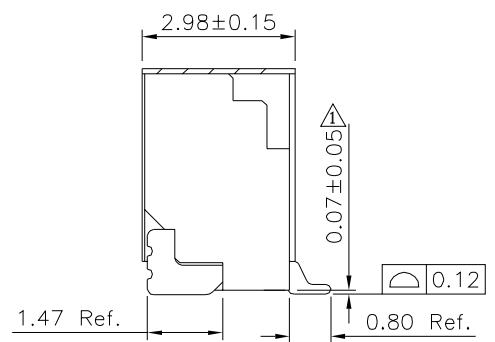
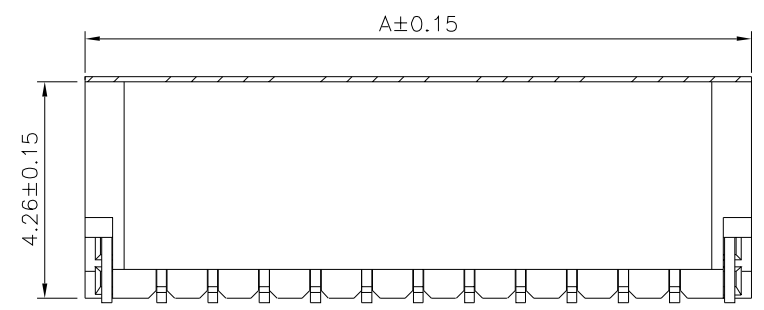


Recommended P.C.B. Layout(Top Side)
P.C.B. Thickness=1.20~1.60mm(Tolerance:±0.05)

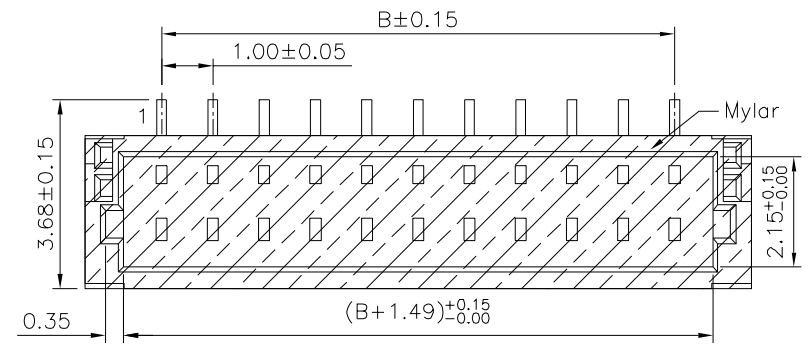

△ SPECIFICATION

- Current Rating:1A AC/DC
- Voltage Rating:50V AC/DC
- Withstanding Voltage:500V AC/Minute
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:500 Megaohms Min.
- Temperature Range:-25°C~+85°C
- △ Insulator:PA9T(UL94V-0),Black
- Terminal:Brass,Tin Plated Over Nickel
- Fixed Slice:Brass,Tin Plated Over Nickel
- RoHS Compliant

Pin	A	B	Pin	A	B
02	4.00	1.00	12	14.00	11.00
03	5.00	2.00	13	15.00	12.00
04	6.00	3.00	14	16.00	13.00
05	7.00	4.00	15	17.00	14.00
06	8.00	5.00	16	18.00	15.00
07	9.00	6.00	17	19.00	16.00
08	10.00	7.00	18	20.00	17.00
09	11.00	8.00	19	21.00	18.00
10	12.00	9.00	20	22.00	19.00
11	13.00	10.00			

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △
21609
SCALE NONE

APPROVED BY MEI
CHECKED BY HZF
DRAWING BY CYP
REV. B3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.25
.XX ±0.20 .X* ±2*
.XXX ±0.10 .XX* ±1*
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△3	B3	Modify Data	HZF	04/27/2019
△2	B2	Modify Data	HZF	07/08/2015
△1	B1	Modify Data	HZF	06/19/2013
△0	B0	NEW RELEASE	HZF	05/02/2011