
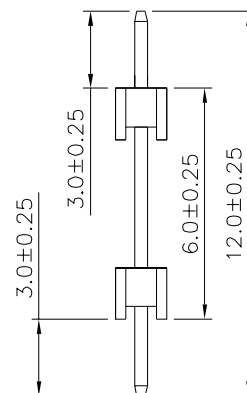
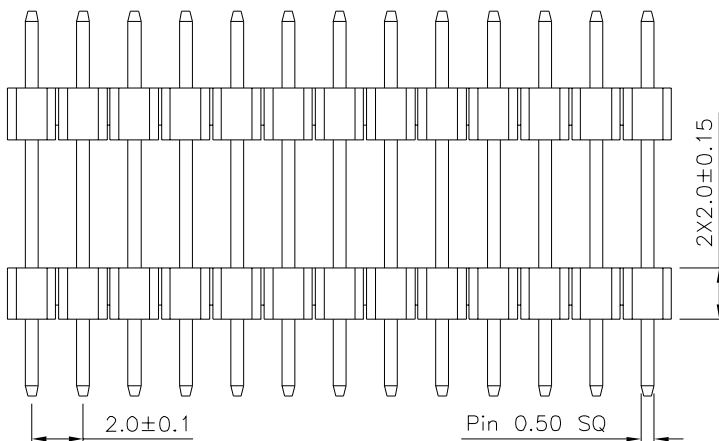


Recommended P.C.B. Layout(Top View)  
(PCB Board Tolerance $\pm 0.05$ )

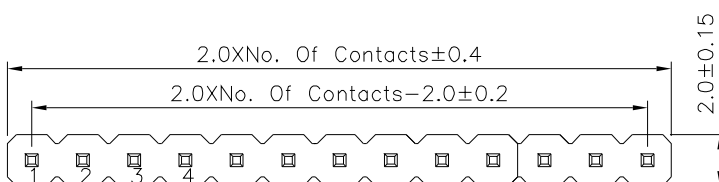

# SPECIFICATION

Current Rating:1.5 Amps  
Withstand Voltage:500V AC Min./Minute  
Contact Resistance:20 Milliohms Max.  
Insulation Resistance:1000 Megaohms Min.  
Operation Temperature:-40°C~+105°C  
Contact:Brass,Gold Flash Over Nickel  
Insulator:PA6T(UL94V-0),Black  
RoHS Compliant

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

21618

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

CYP

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

|                 |                         |
|-----------------|-------------------------|
| X. $\pm 0.25$   | X.* $\pm 2^{\circ}$     |
| .X $\pm 0.20$   | .X* $\pm 1.5^{\circ}$   |
| .XX $\pm 0.15$  | .XX* $\pm 1^{\circ}$    |
| .XXX $\pm 0.10$ | .XXX* $\pm 0.5^{\circ}$ |

UNIT  
mm



NO.

REV.

NEW RELEASE

REVISIONS

CHK

DATE

△

A0

NEW RELEASE

HZF

06/17/2019