



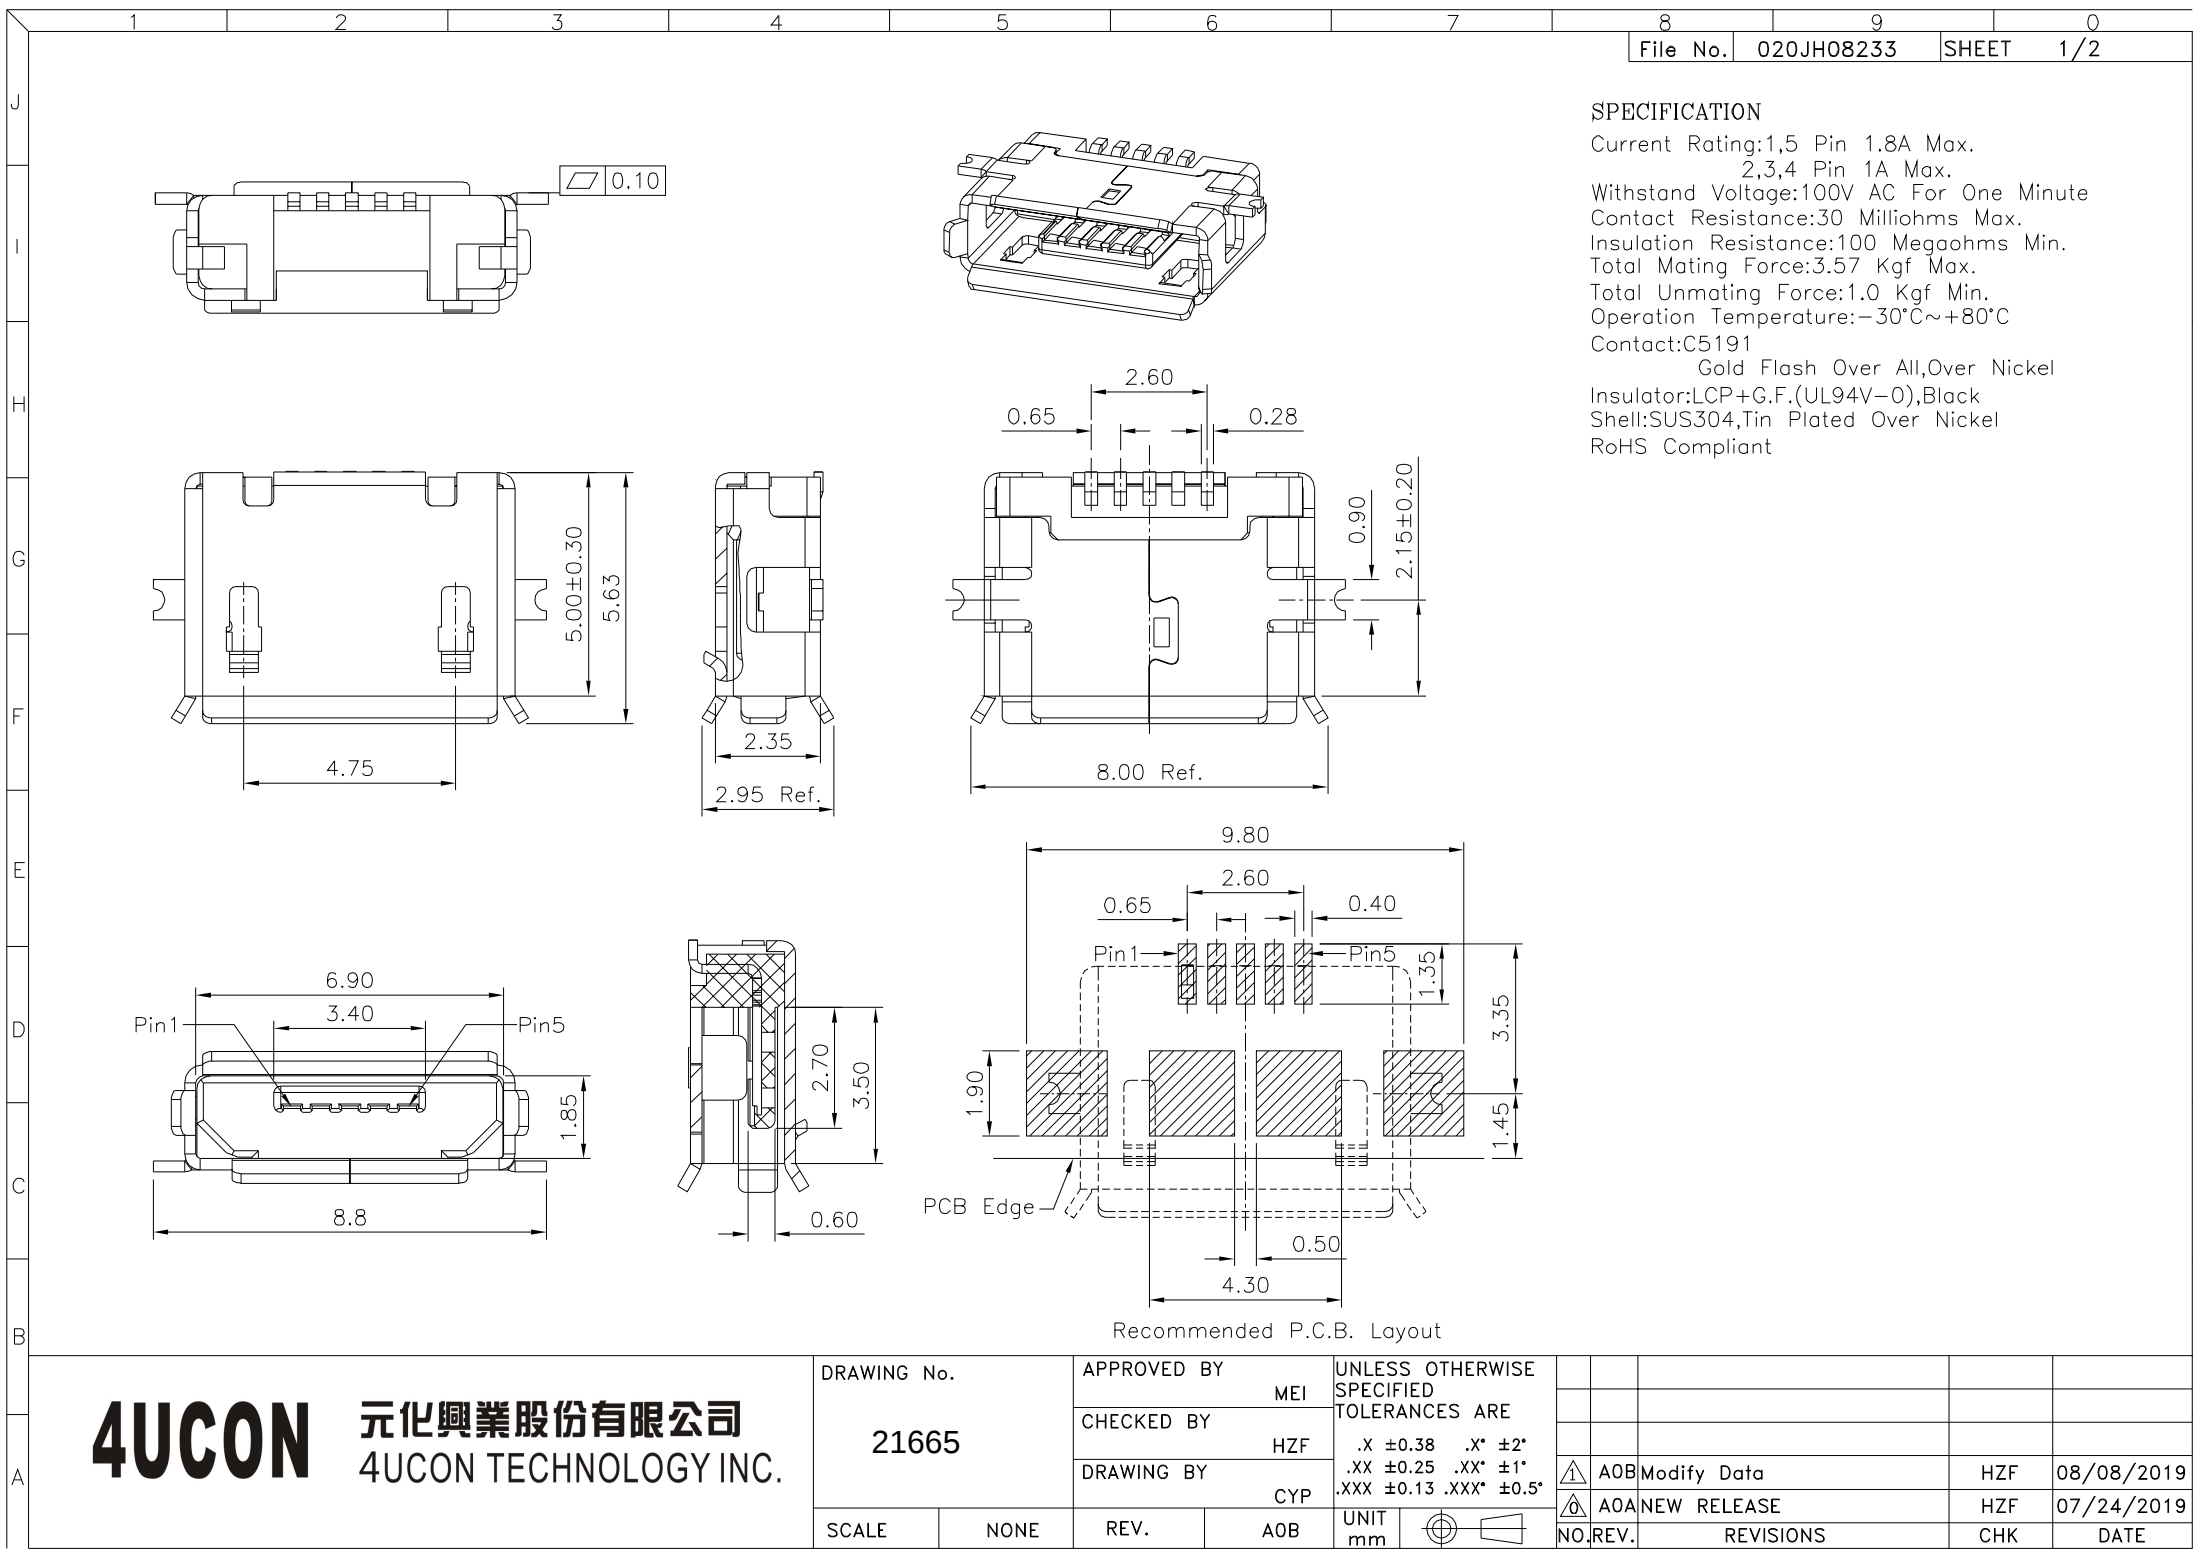

**SPECIFICATION**  
Current Rating:1,5 Pin 1.8A Max.  
2,3,4 Pin 1A Max.  
Withstand Voltage:100V AC For One Minute  
Contact Resistance:30 Milliohms Max.  
Insulation Resistance:100 Megaohms Min.  
Total Mating Force:3.57 Kgf Max.  
Total Unmating Force:1.0 Kgf Min.  
Operation Temperature:-30°C~+80°C  
Contact:C5191  
Gold Flash Over All,Over Nickel  
Insulator:LCP+G.F.(UL94V-0),Black  
Shell:SUS304,Tin Plated Over Nickel  
RoHS Compliant

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

|                          |      |             |     |                                                                                                                   |                                                                                       |     |      |             |     |            |
|--------------------------|------|-------------|-----|-------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-----|------|-------------|-----|------------|
| DRAWING No.<br><br>21665 |      | APPROVED BY |     | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE<br><br>.X ±0.38 .X* ±2*<br>.XX ±0.25 .XX* ±1*<br>.XXX ±0.13 .XXX* ±0.5* |                                                                                       |     |      |             |     |            |
|                          |      | MEI         |     |                                                                                                                   |                                                                                       |     |      |             |     |            |
|                          |      | CHECKED BY  |     |                                                                                                                   |                                                                                       |     |      |             |     |            |
|                          |      | HZF         |     |                                                                                                                   |                                                                                       |     |      |             |     |            |
| DRAWING BY               |      | CYP         |     |                                                                                                                   |                                                                                       | ⚠   | A0B  | Modify Data | HZF | 08/08/2019 |
|                          |      |             |     |                                                                                                                   |                                                                                       | ⚠   | A0A  | NEW RELEASE | HZF | 07/24/2019 |
| SCALE                    | NONE | REV.        | A0B | UNIT<br>mm                                                                                                        |  | NO. | REV. | REVISIONS   | CHK | DATE       |

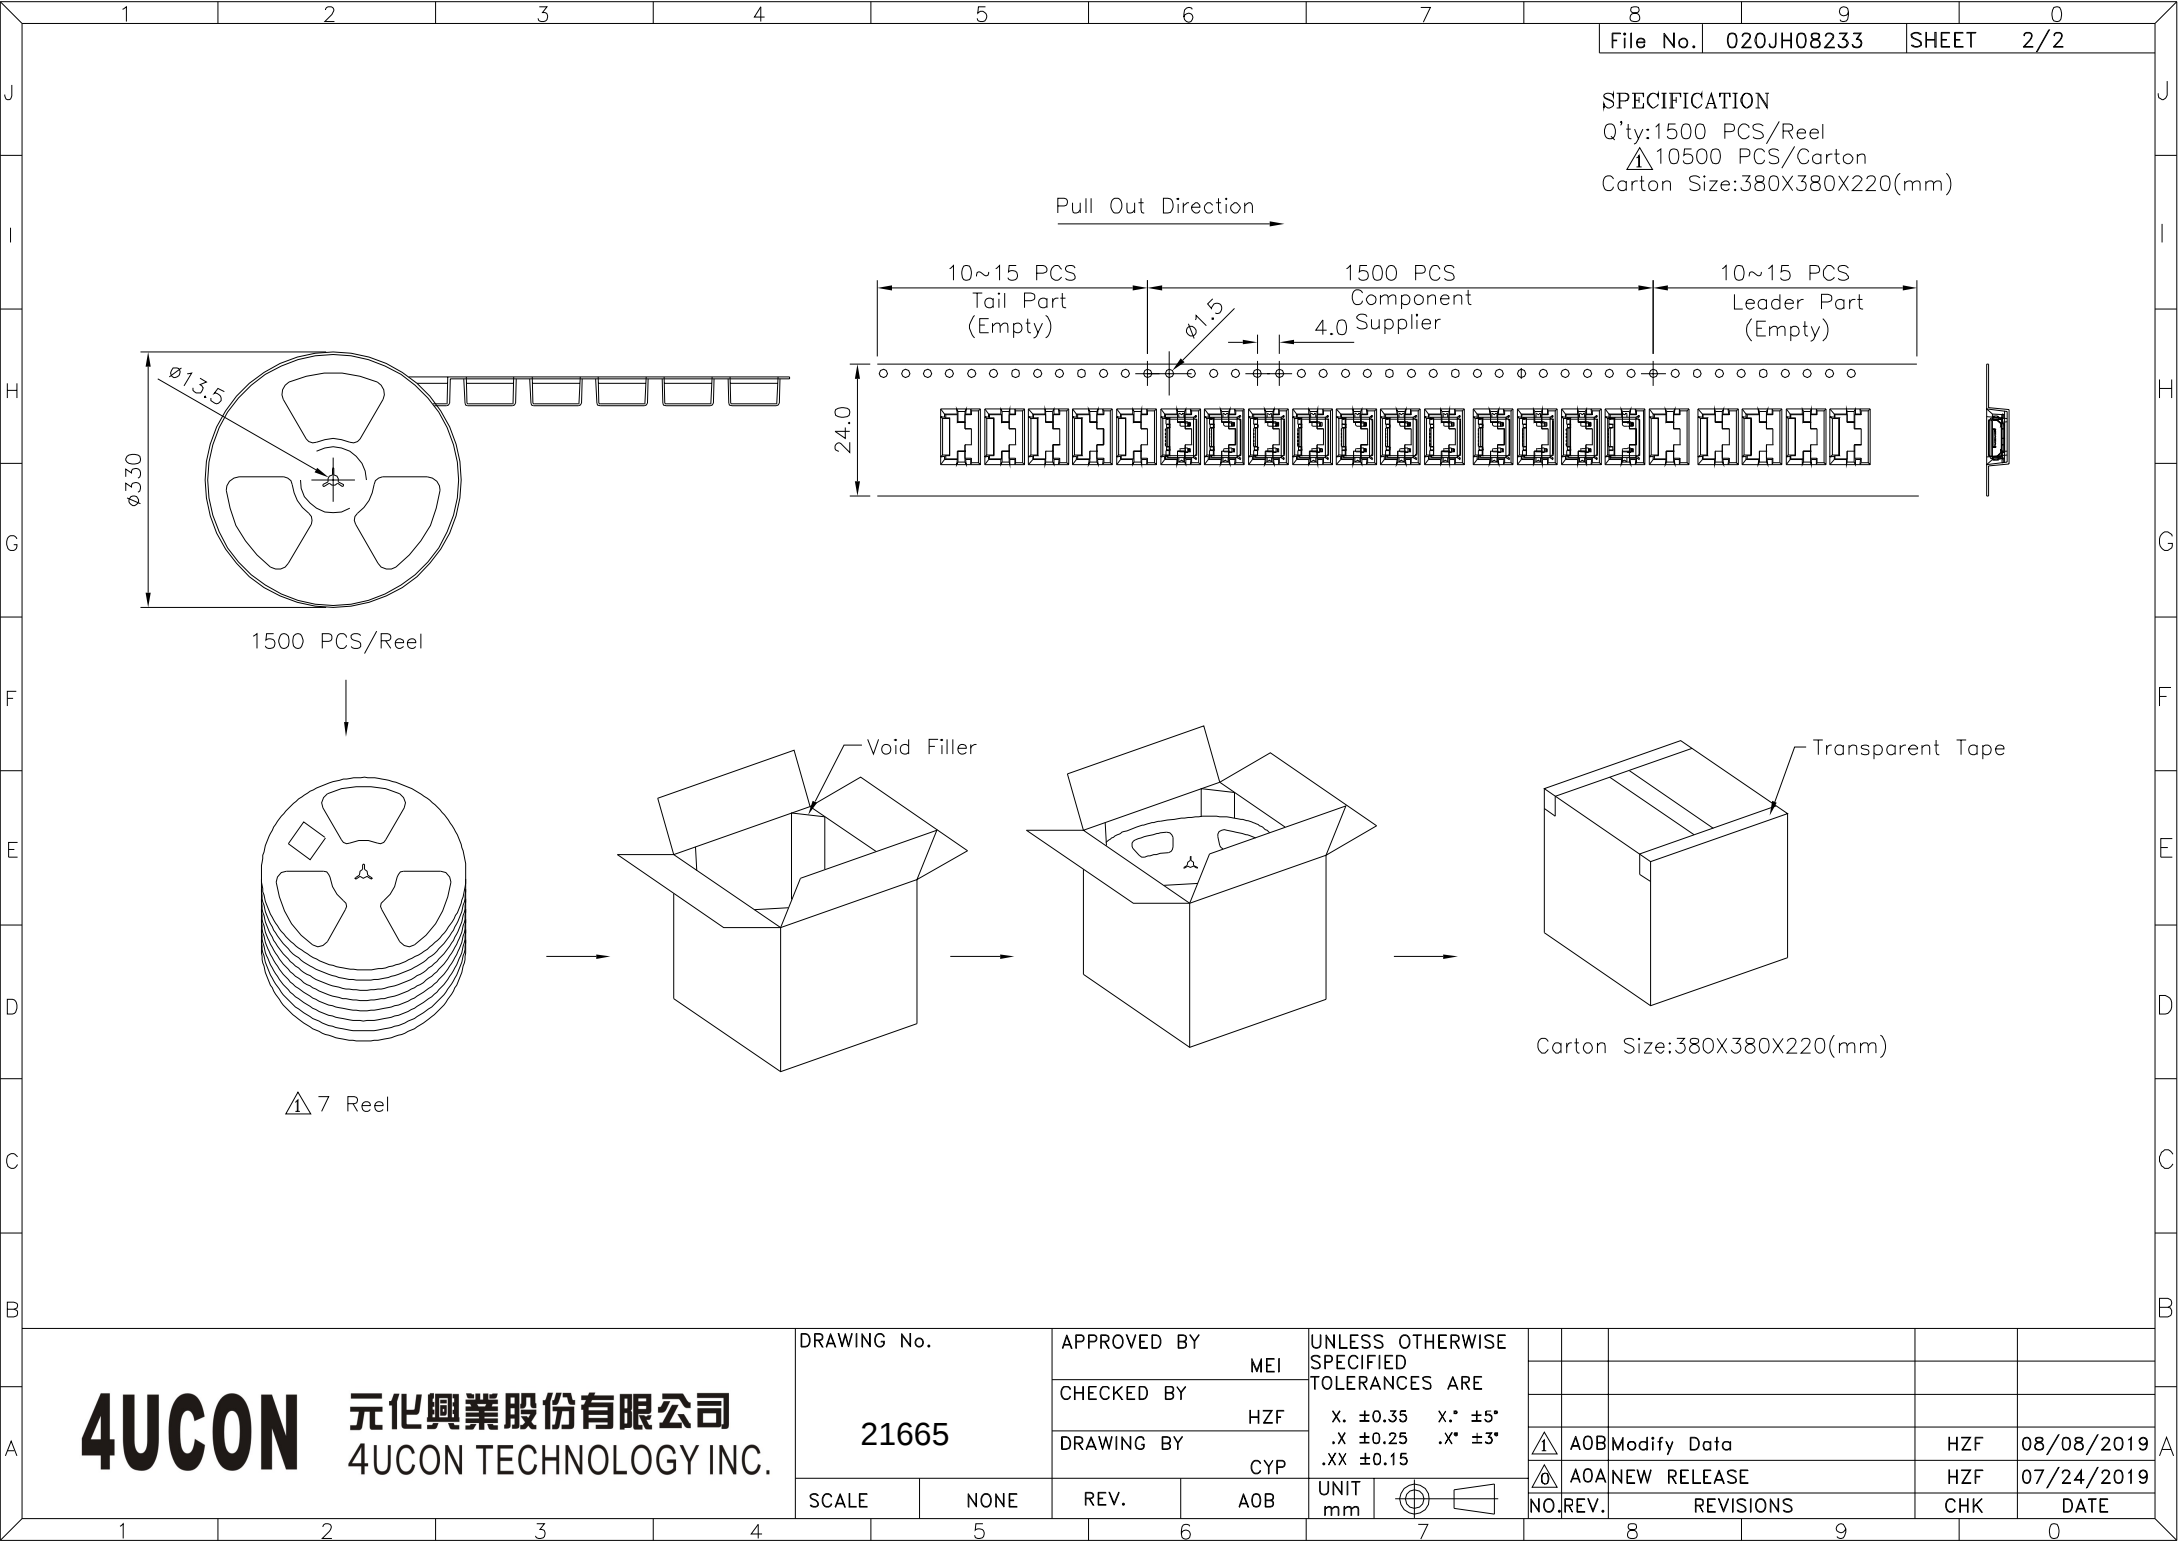

SPECIFICATION  
Q'ty:1500 PCS/Reel  
△10500 PCS/Carton  
Carton Size:380X380X220(mm)

1500 PCS/Reel

△ 7 Reel

Void Filler

Transparent Tape

Carton Size:380X380X220(mm)

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

|                          |      |             |     |                                                                                                                 |                                                                                       |     |      |             |     |            |
|--------------------------|------|-------------|-----|-----------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-----|------|-------------|-----|------------|
| DRAWING No.<br><br>21665 |      | APPROVED BY |     | UNLESS OTHERWISE<br>SPECIFIED<br>TOLERANCES ARE<br><br>X. ±0.35    X.* ±5°<br>.X ±0.25    .X.* ±3°<br>.XX ±0.15 |                                                                                       |     |      |             |     |            |
|                          |      | MEI         |     |                                                                                                                 |                                                                                       |     |      |             |     |            |
|                          |      | CHECKED BY  |     |                                                                                                                 |                                                                                       |     |      |             |     |            |
|                          |      | HZF         |     |                                                                                                                 |                                                                                       |     |      |             |     |            |
|                          |      | DRAWING BY  |     | CYP                                                                                                             |                                                                                       | ⚠   | A0B  | Modify Data | HZF | 08/08/2019 |
|                          |      |             |     |                                                                                                                 |                                                                                       | ⚠   | A0A  | NEW RELEASE | HZF | 07/24/2019 |
| SCALE                    | NONE | REV.        | A0B | UNIT<br>mm                                                                                                      |  | NO. | REV. | REVISIONS   | CHK | DATE       |