
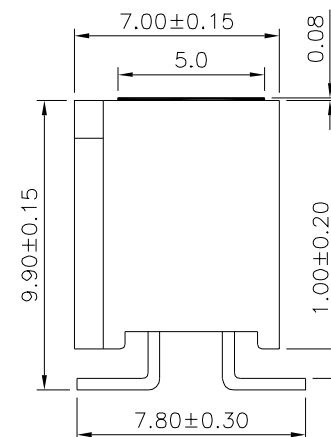


SPECIFICATION

Current Rating:3 Amp
Withstand Voltage:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Insulator:PA6T+30%G.F.(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

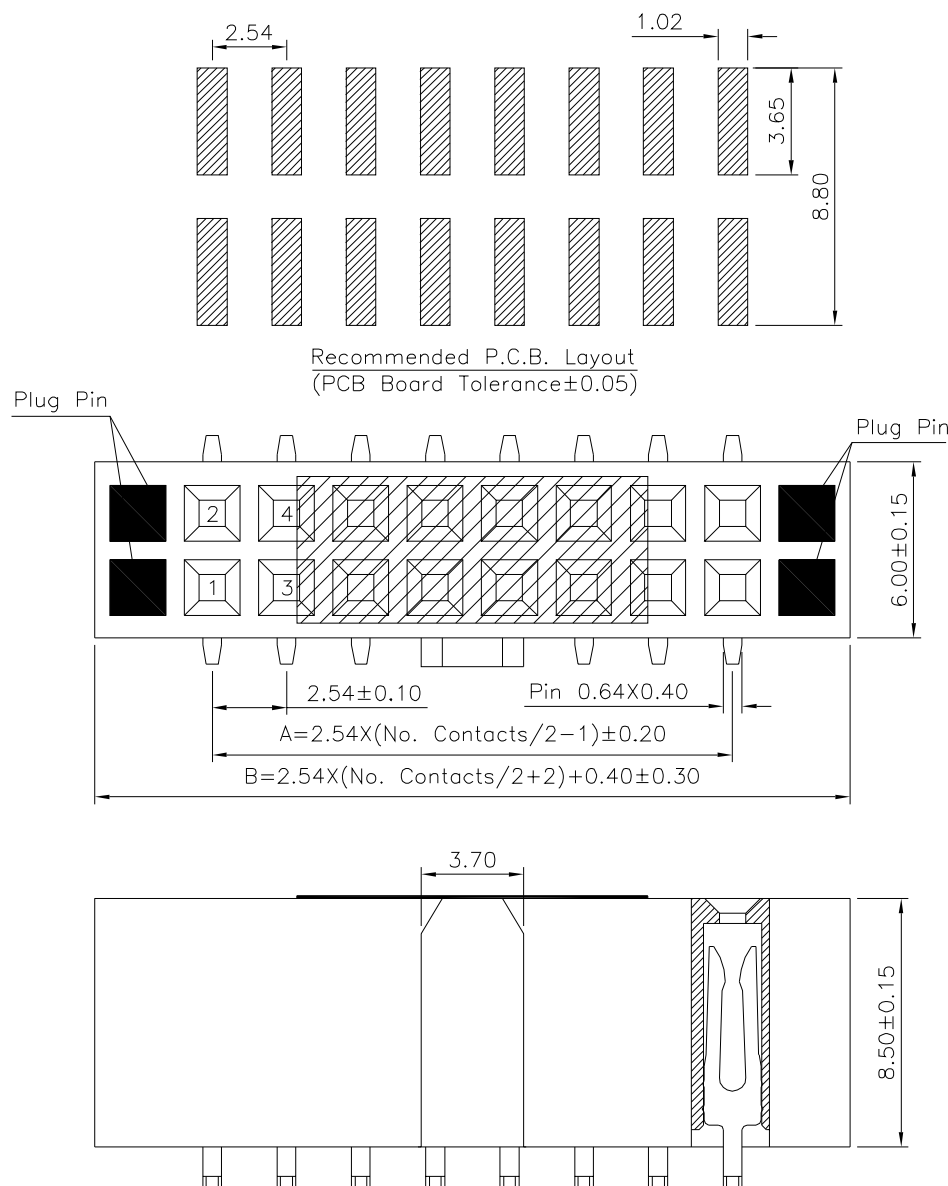

Pin	A	B
10	10.16	18.18
12	12.70	20.72
14	15.24	23.26
16	17.78	25.80
18	20.32	28.34
20	22.86	30.88
22	25.40	33.42
24	27.94	35.96
26	30.48	38.50
28	33.02	41.04
30	35.56	43.58
32	38.10	46.12
34	40.64	48.66
36	43.18	51.20
38	45.72	53.74
40	48.26	56.28

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21779

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.30
.XX ±0.20

UNIT
mm



△ A0

NEW RELEASE

HZF

06/06/2019

NO. REV.

REVISIONS

CHK

DATE