




△ SPECIFICATION

- Current Rating:3.0 Amp
- Withstand Voltage:1000V AC/DC
- △ Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Operation Temperature:−40°C~+105°C
- △ Contact:Phosphor Bronze,Gold Plated Over Nickel
- Insulator:PBT+30%G.F.(UL94V−0),Black
- RoHS Compliant

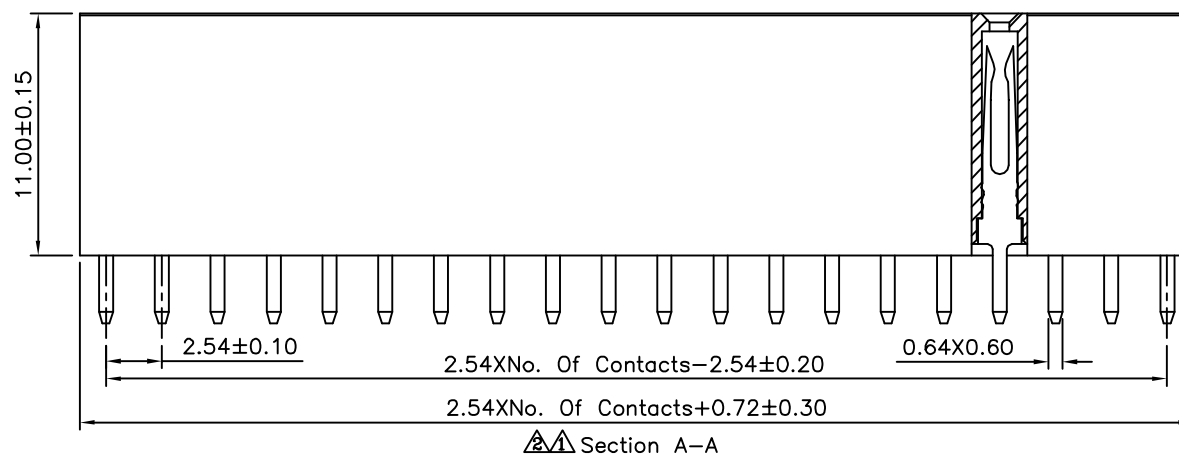

Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance±0.05)

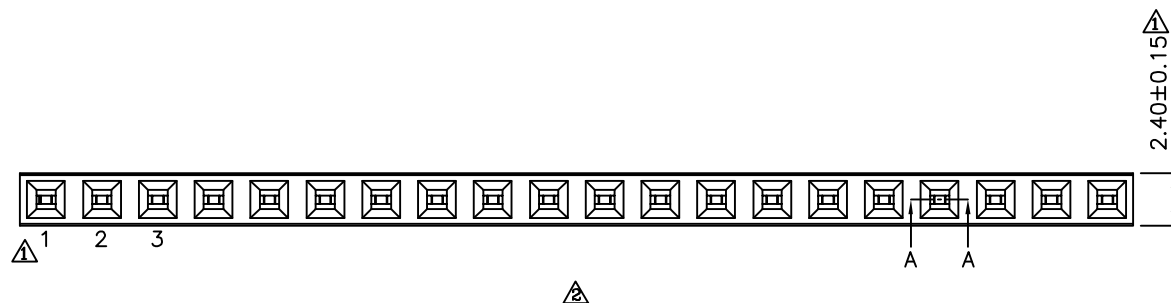

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21787

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


GAO

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.40
.XX ±0.25
.XXX ±0.15
ANG. ±3°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	03/21/2013
△ A1		Modify Data	HZF	08/10/2011
△ A0		NEW RELEASE	HZF	08/04/2008