
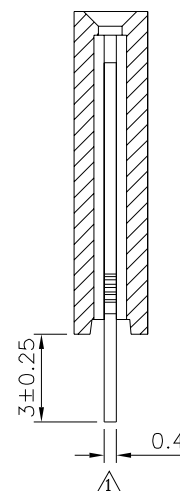
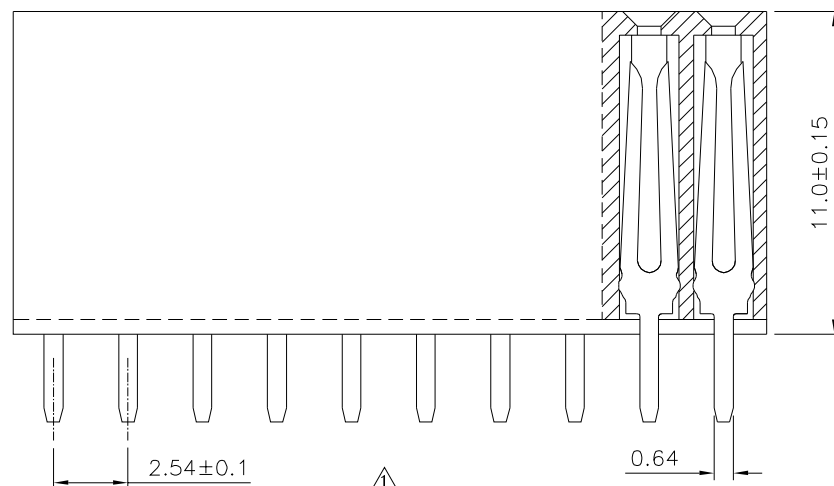


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

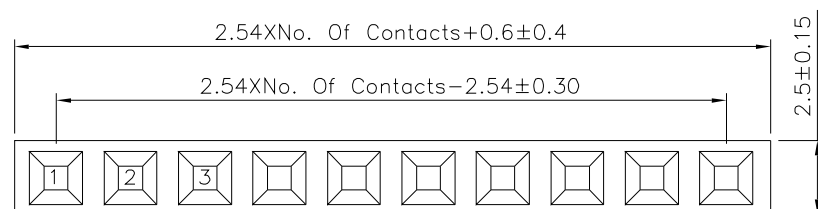

SPECIFICATION

Current Rating:3A
⚠ Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Insulator:PBT(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

21795

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYF


REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X.	± 0.25	X.*	$\pm 2^\circ$
.X	± 0.20	.X*	$\pm 1.5^\circ$
.XX	± 0.15	.XX*	$\pm 1^\circ$
.XXX	± 0.10	.XXX*	$\pm 0.5^\circ$

	UNIT mm
--	------------



5 ^o		A1
----------------	---	----

	A1
--	----

Modify Data

HZF

04/02/2024

ΔU	ΔU
NO	REV

REVISIONS

НЗГ
СНГ

11/27/2	
DATE	