
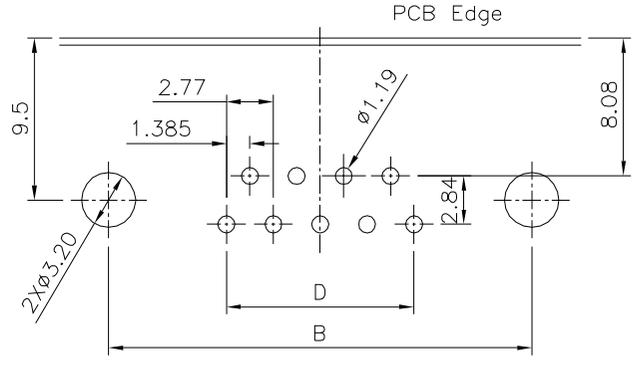
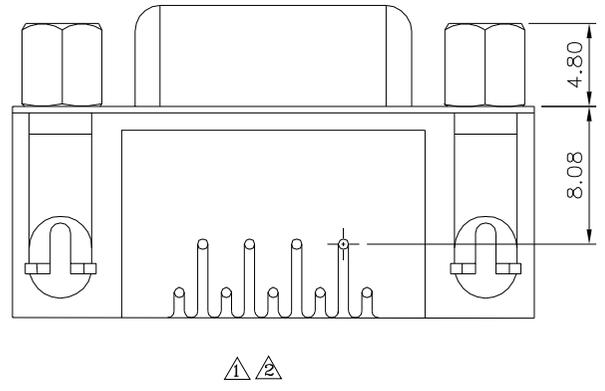
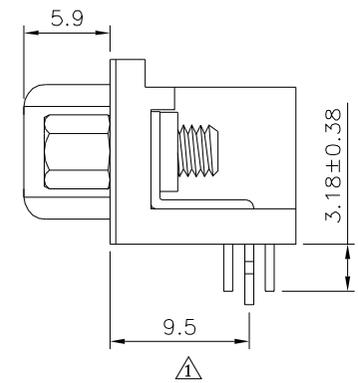


△△ SPECIFICATION

Current Rating:5A
 Insulation Resistance:1000 Megohms Min. At 500V DC
 Withstanding Voltage:1000V Per Minute
 Contact Resistance:30 Milliohms Max.10 Sec.
 Operating Temperature:-55°C~+105°C
 Insulator:PBT(UL94V-0),Black
 Contact:Brass,Gold Flash On Contact Area,Tin Plated On Solder Tails,Over Nickel
 Shell:Steel,Nickel Plated Over All
 Square Rivet:Copper Alloy,Nickel Plated Over All
 Ground:Steel,Tin Plated On Solder Tails,Over Nickel
 Screw:Steel,Nickel Plated Over All
 RoHS Compliant

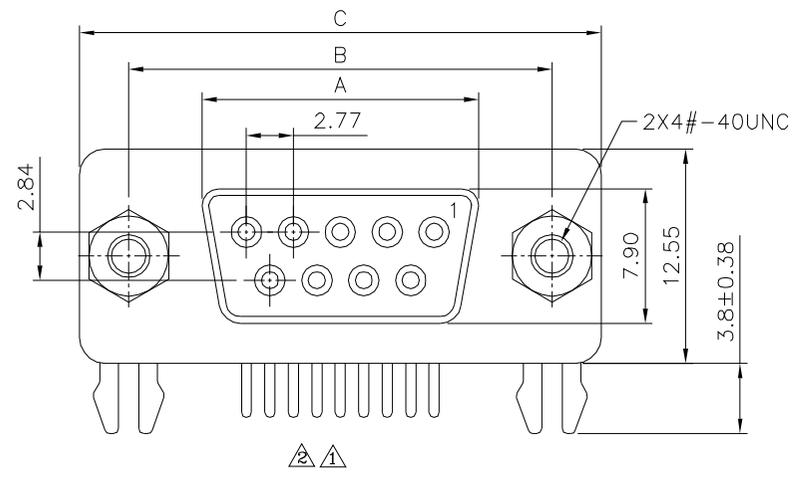

Pin	A±0.20	B±0.25	C±0.38	D
9	16.33	24.99	30.80	11.08
15	24.66	33.32	39.10	19.39
25	38.38	47.04	53.00	33.24
37	54.84	63.50	69.32	49.86

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.38 △ .XX ±0.25 △ .XXX ±0.15
21797		MEI		
		HZF		
		DRAWING BY		
		CYP		
SCALE	NONE	REV.	A3	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△A3		Modify Data	HZF	09/03/2025
△A2		Modify Data	HZF	08/27/2025
△A1		Modify Data	HZF	12/05/2019
△A0		NEW RELEASE	SHIN	02/20/2007