

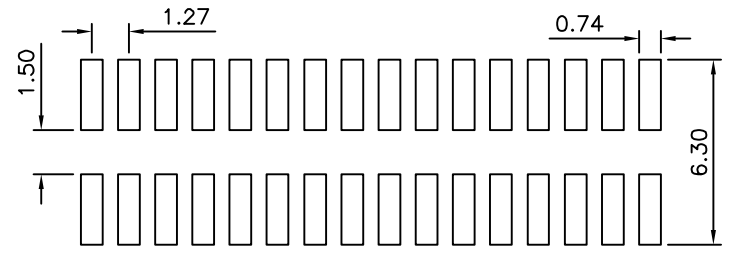
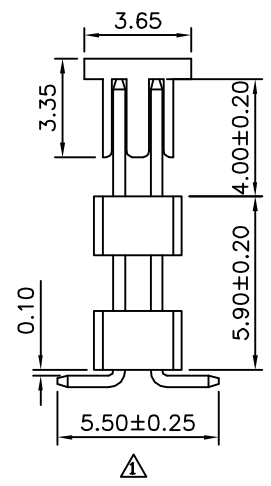


SPECIFICATION
 Current Rating:1 Amp
 Withstand Voltage:500V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megohms Min.
 Operation Temperature:-40°C~+105°C
 Insulator:PA6T+30%G.F.(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

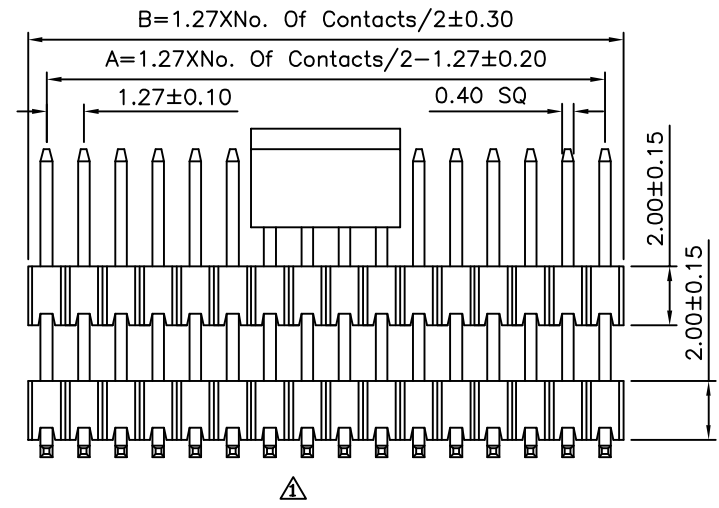

△ Recommended P.C.B. Layout
 (PCB Board Tolerance±0.05)

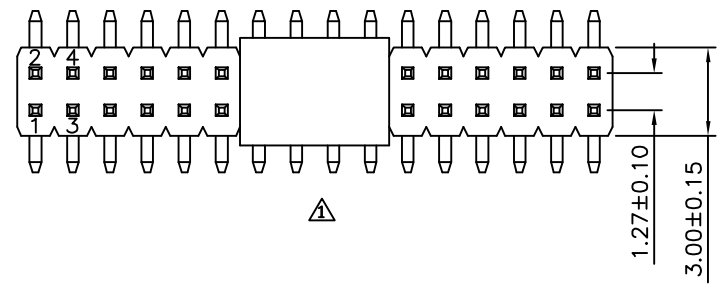

Pin	A	B	Pin	A	B
04	1.27	2.54	54	33.02	34.29
06	2.54	3.81	56	34.29	35.56
08	3.81	5.08	58	35.56	36.83
10	5.08	6.35	60	36.83	38.10
12	6.35	7.62	62	38.10	39.37
14	7.62	8.89	64	39.37	40.64
16	8.89	10.16	66	40.64	41.91
18	10.16	11.43	68	41.91	43.18
20	11.43	12.70	70	43.18	44.45
22	12.70	13.97	72	44.45	45.72
24	13.97	15.24	74	45.72	46.99
26	15.24	16.51	76	46.99	48.26
28	16.51	17.78	78	48.26	49.53
30	17.78	19.05	80	49.53	50.80
32	19.05	20.32	82	50.80	52.07
34	20.32	21.59	84	52.07	53.34
36	21.59	22.86	86	53.34	54.61
38	22.86	24.13	88	54.61	55.88
40	24.13	25.40	90	55.88	57.15
42	25.40	26.67	92	57.15	58.42
44	26.67	27.94	94	58.42	59.69
46	27.94	29.21	96	59.69	60.96
48	29.21	30.48	98	60.96	62.23
50	30.48	31.75	100	62.23	63.50
52	31.75	33.02			

4UCON

元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 21819
 SCALE NONE

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY CYP
 REV. A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.30
 .XX ±0.20
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	03/09/2018
△ A0		NEW RELEASE	HZF	03/19/2017