
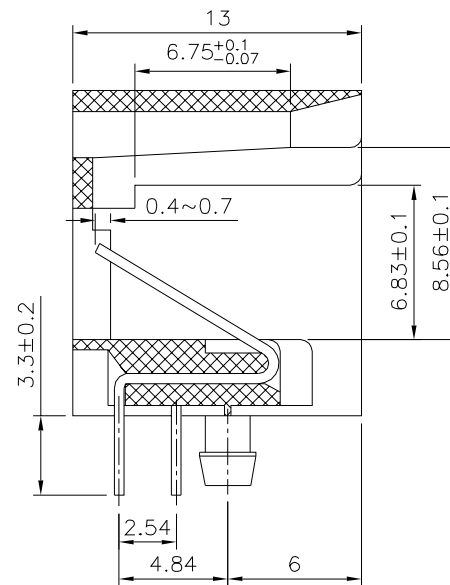
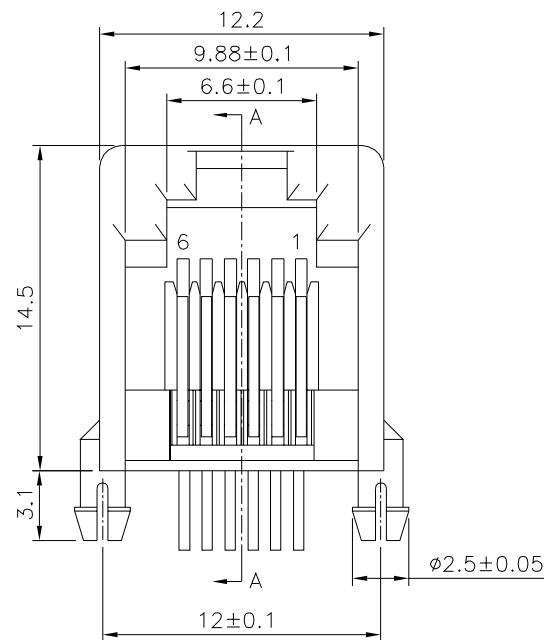
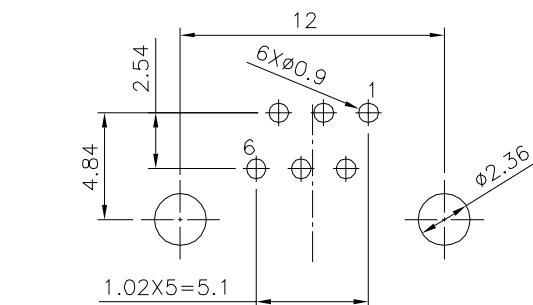


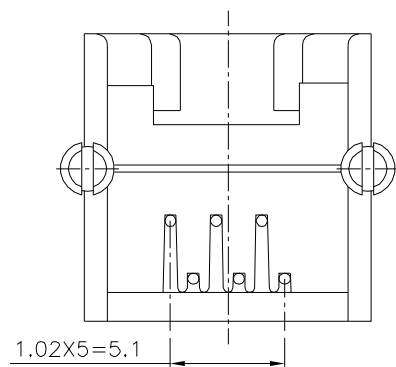

Section A-A

Recommended P.C.B. Layout(Component Side)
Thickness:1.60mm (Tolerance=±0.05)

SPECIFICATION

Voltage Rating:125V AC RMS

Current Rating:1.5 Amp

Contact Resistance:20 Milliohms Max.

Insulation Resistance:1000 Megaohms Min. @500V DC

Dielectric Strength:1000V AC Or 1500V DC RMS
@0.5mA 50Hz/60Hz 1 Minute

Operation Temperature:-40°C~+85°C

Storage Temperature:-40°C~+85°C Relative Humidity<80%

⚠ Housing & Insert:PBT(UL94V-0),Black

Contact:Phosphor Bronze,Ø0.46mm

Gold Flash Over All,Over Nickel

Operating Life:750 Cycles Min.

Mating/Unmating Force:30N Max.

Retention Strength:50N Min. For 60S±5S

Mates With Modular Plug Conforming To FCC Part 68,

Subpart F.

RoHS Compliant

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. ⚠

21820

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

B1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
0~15 ±0.15
15~30 ±0.20
30~ ±0.25
ANG. ±1°UNIT
mm

⚠ B1

Modify Data

HZF

08/13/2018

⚠ B0

NEW RELEASE

HZF

09/22/2016

NO. REV.

REVISIONS

CHK

DATE