

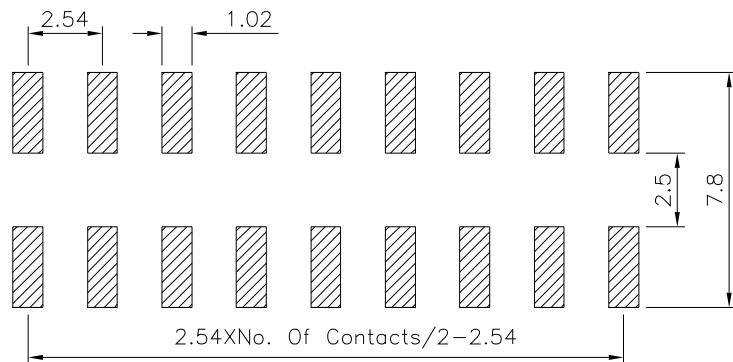
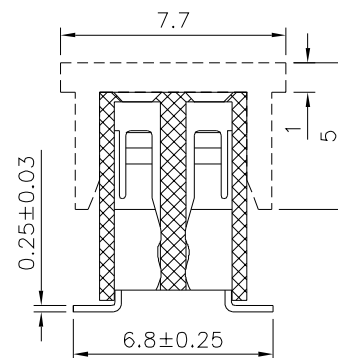


SPECIFICATION

Current Rating:3 Amp
 Withstand Voltage:500V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 Insulator:PA6T(UL94V-O),Black
 RoHS Compliant

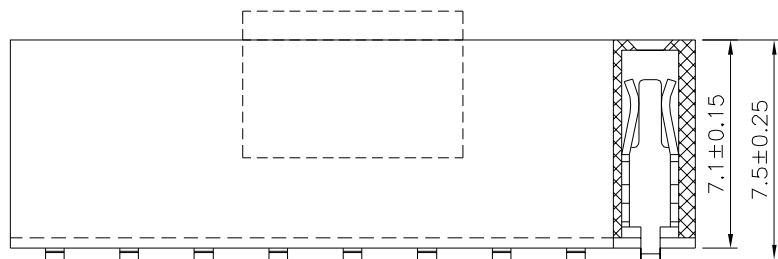

Recommended P.C.B. Layout(Top View)
 (PCB Board Tolerance±0.05)

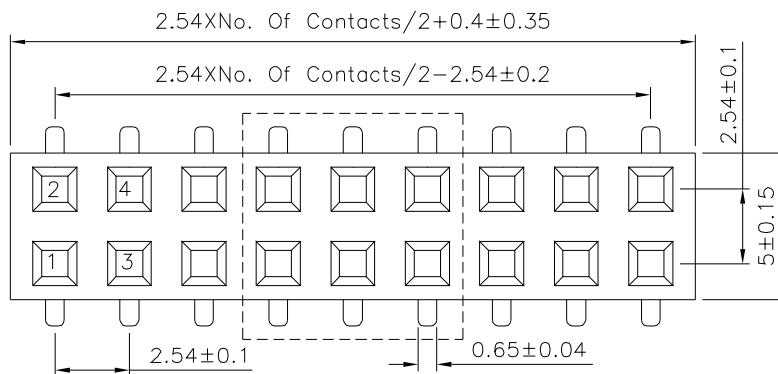

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

21849

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

CYP

REV.

A0

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ±0.25 X.° ±2°
 .X ±0.20 .X° ±1.5°
 .XX ±0.15 .XX° ±1°
 .XXX ±0.10 .XXX° ±0.5°
 UNIT mm



NO.

REV.

NEW RELEASE

REVISIONS

CHK

DATE

07/27/2017